



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[HILLSBOROUGH CO BOC]

Machine Id
VOLVO EW160EL 324178

Component
Diesel Engine

Fluid
VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP449883	VCP435613	VCP431775
Sample Date		Client Info		13 Jun 2024	19 Feb 2024	07 Nov 2023
Machine Age	hrs	Client Info		1437	929	479
Oil Age	hrs	Client Info		0	0	479
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	9	9	14
Chromium	ppm	ASTM D5185m	>10	<1	1	1
Nickel	ppm	ASTM D5185m	>10	<1	2	5
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	2	4
Lead	ppm	ASTM D5185m	>20	0	<1	<1
Copper	ppm	ASTM D5185m	>15	1	2	6
Tin	ppm	ASTM D5185m	>10	<1	1	2
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	17	29	25
Potassium	ppm	ASTM D5185m	>20	2	3	2
Fuel		WC Method	>6.0	<1.0	<1.0	0.4
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	6.6	6.4	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	20.5	22.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	4
Boron	ppm	ASTM D5185m	2.5	41	31	48
Barium	ppm	ASTM D5185m	0.0	0	2	0
Molybdenum	ppm	ASTM D5185m	0.7	42	45	34
Manganese	ppm	ASTM D5185m	0.0	<1	1	4
Magnesium	ppm	ASTM D5185m	256	651	585	496
Calcium	ppm	ASTM D5185m	2057	1595	1319	1448
Phosphorus	ppm	ASTM D5185m	935	923	910	866
Zinc	ppm	ASTM D5185m	1223	1172	1083	1039
Sulfur	ppm	ASTM D5185m	4079	2991	3192	2797
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.3	18.1	20.4
Base Number (BN)	mg KOH/g	ASTM D2896	10	10.1	9.5	9.6
Visc @ 100°C	cSt	ASTM D445	15.0	12.7	12.8	10.7

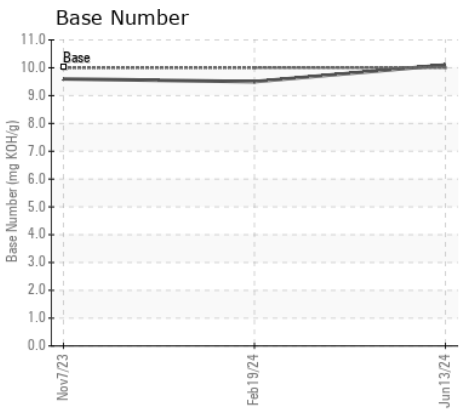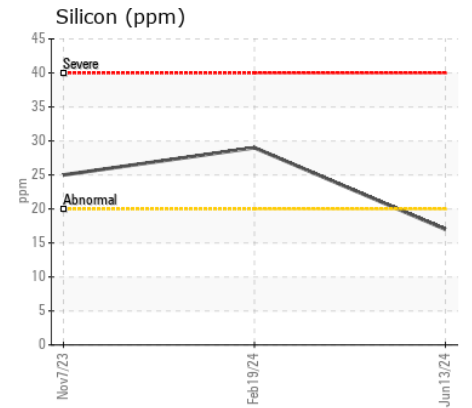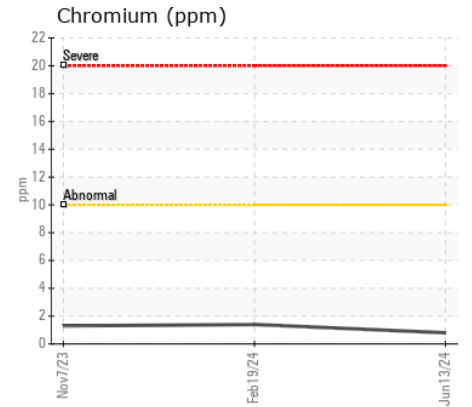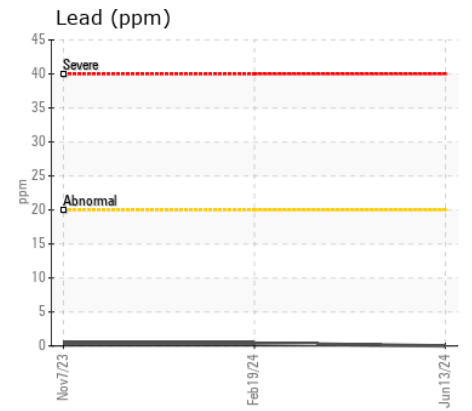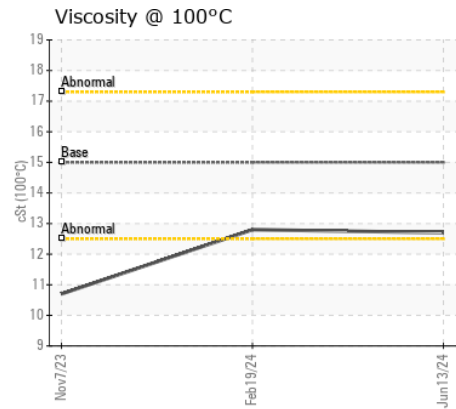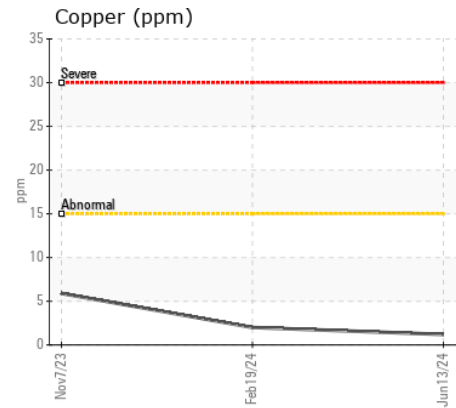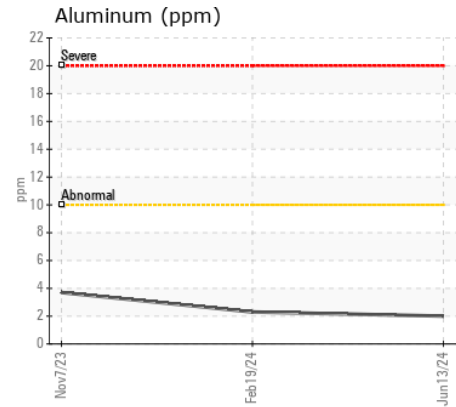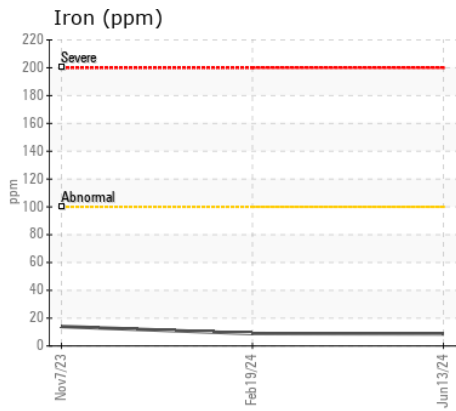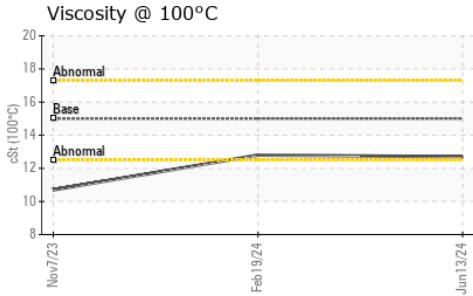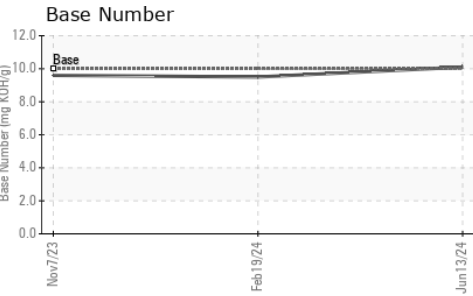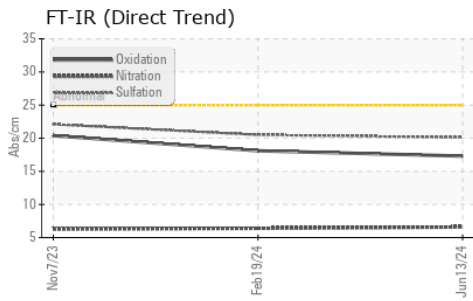

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP449883 **Received** : 21 Jun 2024
Lab Number : 06216528 **Tested** : 24 Jun 2024
Unique Number : 11089392 **Diagnosed** : 24 Jun 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)