



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area

Ascendum Machinery

Machine Id

VOLVO EC350E EX-08 (S/N 314211)

Component

Diesel Engine

Fluid

VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0007044	ASC0005150	ASC0000397
Sample Date		Client Info		18 Jun 2024	15 Mar 2024	27 Apr 2023
Machine Age	hrs	Client Info		5062	5062	3501
Oil Age	hrs	Client Info		5062	1561	485
Filter Age	hrs	Client Info		0	0	485
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	12	7
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		<1	1	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>10	2	4	1
Lead	ppm	ASTM D5185m	>20	<1	2	0
Copper	ppm	ASTM D5185m	>15	1	3	4
Tin	ppm	ASTM D5185m	>10	<1	1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	7	13	6
Potassium	ppm	ASTM D5185m	>20	3	3	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.7	11.3	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	23.1	19.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	0	2
Boron	ppm	ASTM D5185m		31	17	9
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		62	43	55
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		180	482	838
Calcium	ppm	ASTM D5185m		2104	1820	1220
Phosphorus	ppm	ASTM D5185m		1034	921	907
Zinc	ppm	ASTM D5185m		1267	1156	1218
Sulfur	ppm	ASTM D5185m		3557	3079	3429
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.1	24.2	16.6
Base Number (BN)	mg KOH/g	ASTM D2896		6.5	6.5	4.1
Visc @ 100°C	cSt	ASTM D445		12.3	12.4	12.1


● Viscosity @ 100°C

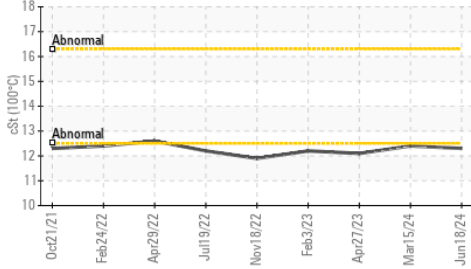


Ferrous Alloys

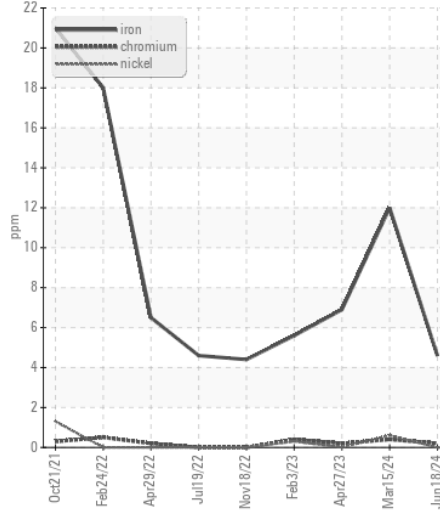


FT-IR (Direct Trend)

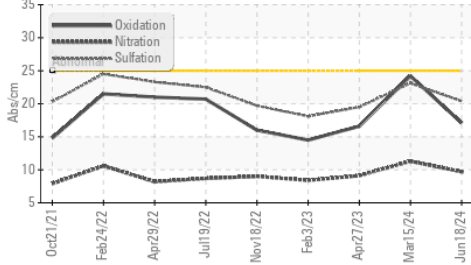


Base Number

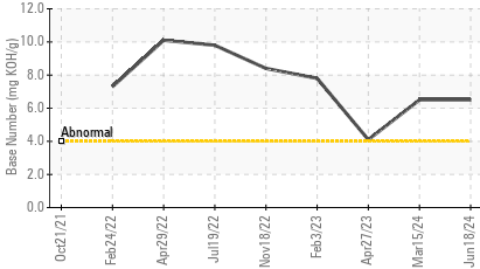


Non-ferrous Metals

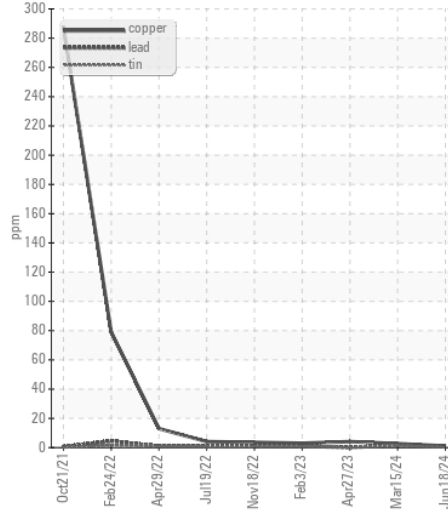

● Viscosity @ 100°C

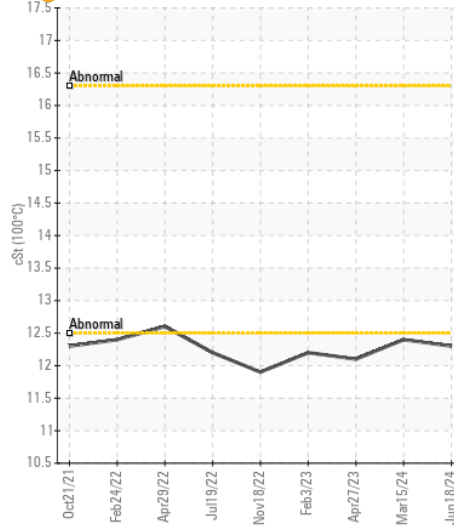

Base Number

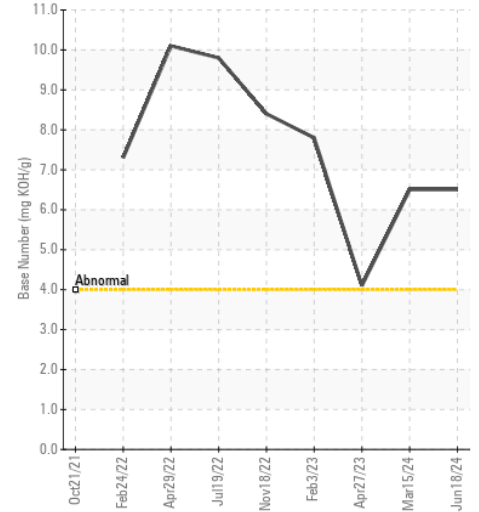

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0007044 **Received** : 21 Jun 2024
Lab Number : 06216556 **Tested** : 24 Jun 2024
Unique Number : 11089420 **Diagnosed** : 24 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: TBN)

CAROLINA EXCAVATING
 1036 BRANCHVIEW DR, SUITE 106
 CONCORD, NC
 US 28025
 Contact: KEVIN LADGERWOOD
 kevin@carlinaexcavation.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: