



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[W52514 VEOLIA]**  
 Machine Id  
**JOHN DEERE 824L 1DW824LXENL713372**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0224940</b>	JR0199916	JR0179815
Sample Date		Client Info		<b>18 Jun 2024</b>	05 Mar 2024	23 Oct 2023
Machine Age	hrs	Client Info		<b>3507</b>	2966	2476
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>12</b>	10	11
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	5	6
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>3</b>	5	3
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	<1
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>7</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	0
Fuel	%	ASTM D3524	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.1</b>	7.8	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.8</b>	21.0	21.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>0</b>	2	3
Boron	ppm	ASTM D5185m		<b>130</b>	243	239
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>175</b>	243	253
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>450</b>	813	852
Calcium	ppm	ASTM D5185m		<b>1821</b>	1330	1407
Phosphorus	ppm	ASTM D5185m		<b>993</b>	930	811
Zinc	ppm	ASTM D5185m		<b>1195</b>	1102	1114
Sulfur	ppm	ASTM D5185m		<b>3551</b>	3131	3187
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.0</b>	15.3	15.3
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>7.6</b>	9.1	9.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.8</b>	13.2	13.6


**FT-IR (Direct Trend)**

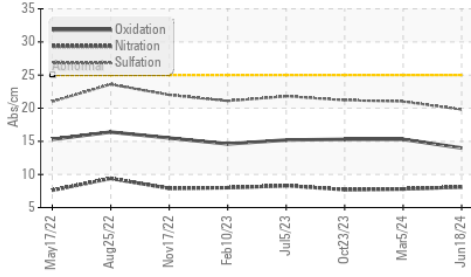


**Base Number**

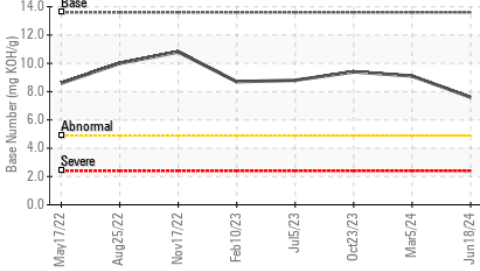


**Viscosity @ 100°C**

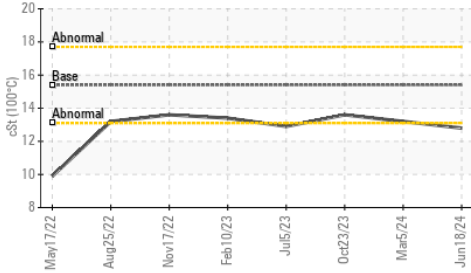


**Ferrous Alloys**

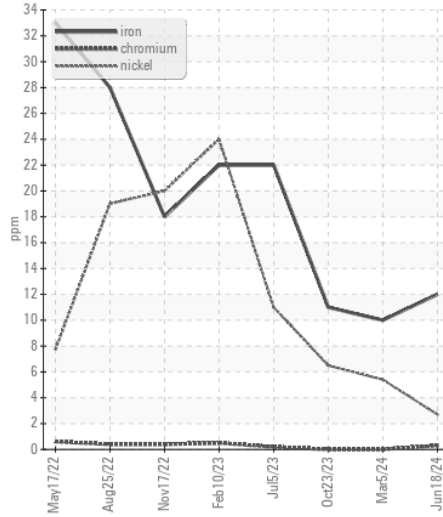


**Non-ferrous Metals**

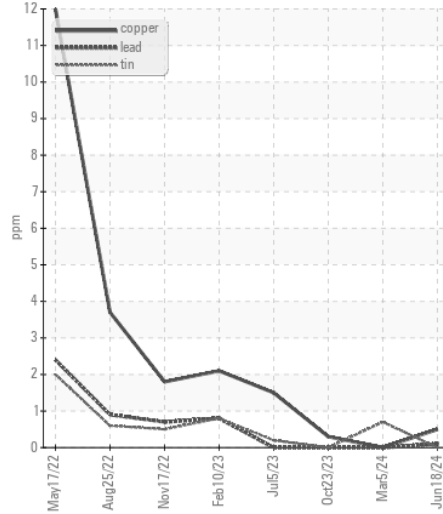

**Viscosity @ 100°C**

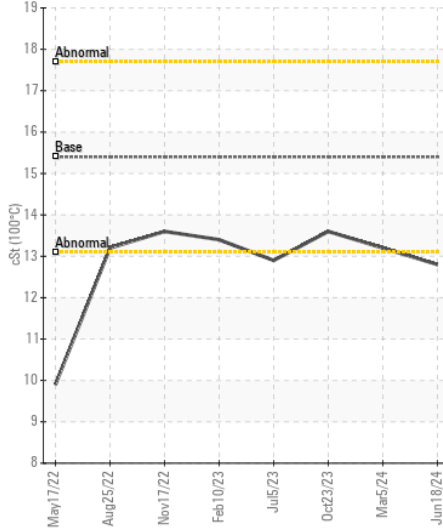

**Base Number**

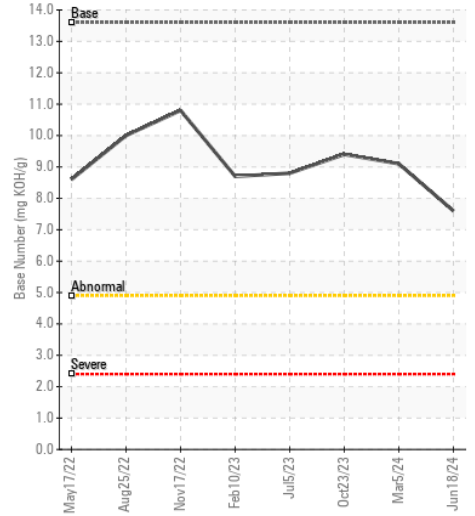

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0224940 **Received** : 21 Jun 2024  
**Lab Number** : 06216560 **Tested** : 24 Jun 2024  
**Unique Number** : 11089424 **Diagnosed** : 24 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: FuelDilution, TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292