



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
139470
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019631	RPL0007832	RPL0007363
Sample Date		Client Info		20 May 2024	26 Apr 2023	03 Nov 2022
Machine Age	mls	Client Info		139470	139470	42023
Oil Age	mls	Client Info		139470	139470	42000
Filter Age	mls	Client Info		0	0	42000
Oil Changed		Client Info		N/A	N/A	Not Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	31	20	91
Chromium	ppm	ASTM D5185m	>20	2	1	5
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		2	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	11	12	57
Lead	ppm	ASTM D5185m	>40	<1	2	6
Copper	ppm	ASTM D5185m	>330	2	5	41
Tin	ppm	ASTM D5185m	>15	<1	1	4
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	10	▲ 35
Potassium	ppm	ASTM D5185m	>20	17	31	169
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	10.8	8.7	13.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.2	24.1	27.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	3	5
Boron	ppm	ASTM D5185m		163	238	29
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		119	110	32
Manganese	ppm	ASTM D5185m		<1	1	6
Magnesium	ppm	ASTM D5185m		713	662	700
Calcium	ppm	ASTM D5185m		1590	1687	1406
Phosphorus	ppm	ASTM D5185m	1360	754	724	710
Zinc	ppm	ASTM D5185m	1480	918	898	874
Sulfur	ppm	ASTM D5185m		2633	2912	3175
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.0	18.1	25.6
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	7.7	9.1	5.6
Visc @ 100°C	cSt	ASTM D445	15.1	13.2	13.3	13.1

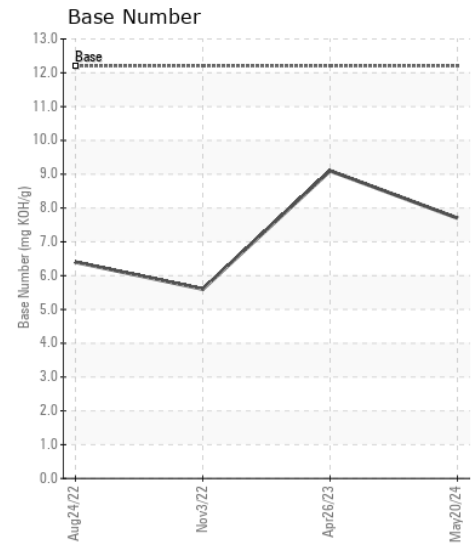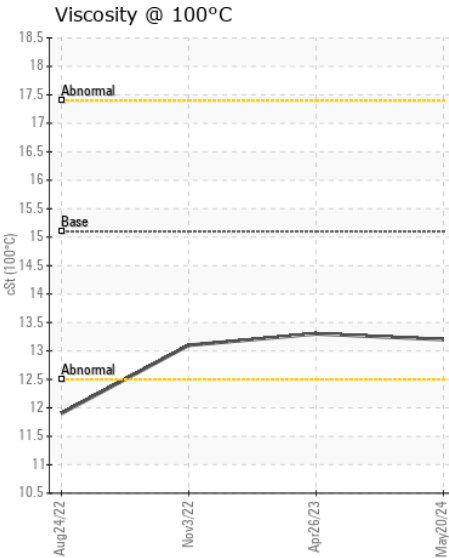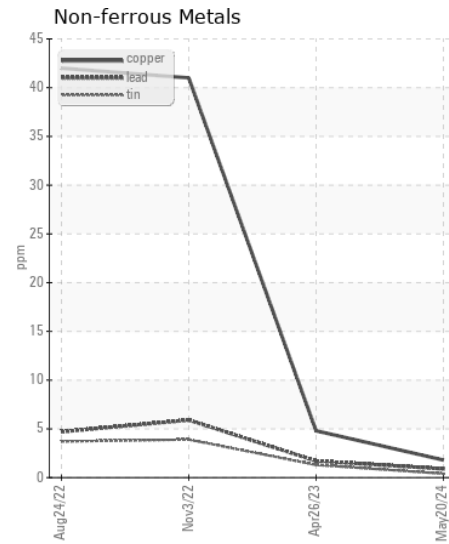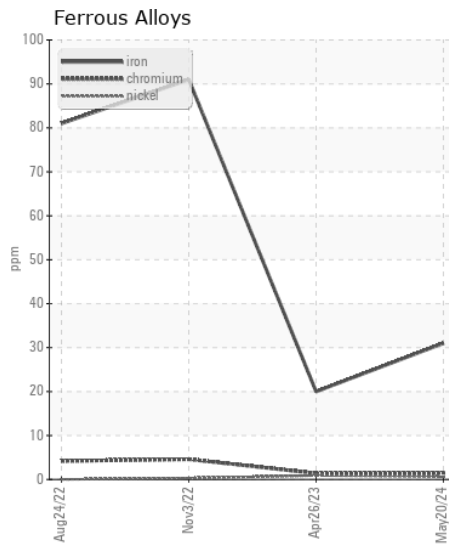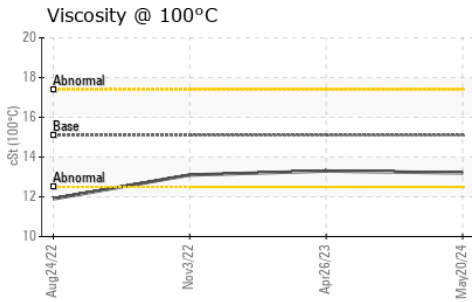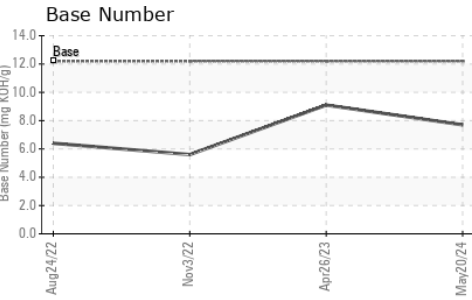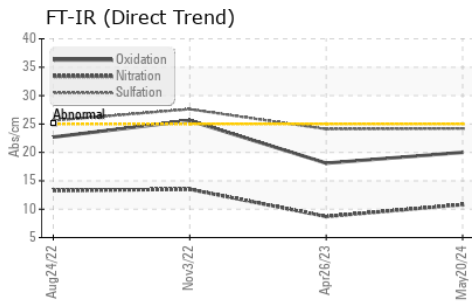

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0019631

Lab Number : 06216573

Unique Number : 11089437

Test Package : FLEET

Received : 21 Jun 2024

Tested : 24 Jun 2024

Diagnosed : 24 Jun 2024 - Wes Davis

RTL PACLEASE - 7005 - Arlington

1900 E Division

Arlington, TX

US 76011

Contact: Ricardo Ronquillo

ronquillor@rushenterprises.com

T: (469)203-8172

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)