



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
139449
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019712	RPL0016769	RPL0016631
Sample Date		Client Info		10 Jun 2024	12 Apr 2024	07 Feb 2024
Machine Age	mls	Client Info		337908	314590	278366
Oil Age	mls	Client Info		267208	280114	25000
Filter Age	mls	Client Info		0	0	25000
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	33	24	26
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		10	2	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	7	9
Lead	ppm	ASTM D5185m	>40	2	2	1
Copper	ppm	ASTM D5185m	>330	<1	0	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	6	7
Potassium	ppm	ASTM D5185m	>20	15	15	15
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	11.9	12.3	12.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.5	27.7	27.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	<1	2
Boron	ppm	ASTM D5185m		25	65	55
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		42	108	110
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		741	655	630
Calcium	ppm	ASTM D5185m		1516	1601	1561
Phosphorus	ppm	ASTM D5185m	1360	714	693	667
Zinc	ppm	ASTM D5185m	1480	877	821	830
Sulfur	ppm	ASTM D5185m		2758	2790	2296
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.3	25.3	26.1
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	4.7	5.5	5.4
Visc @ 100°C	cSt	ASTM D445	15.1	13.8	13.9	13.7


FT-IR (Direct Trend)

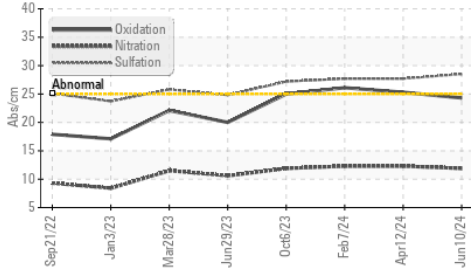


Ferrous Alloys

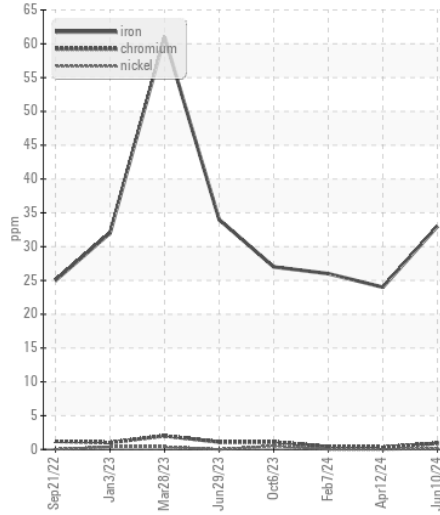


Base Number

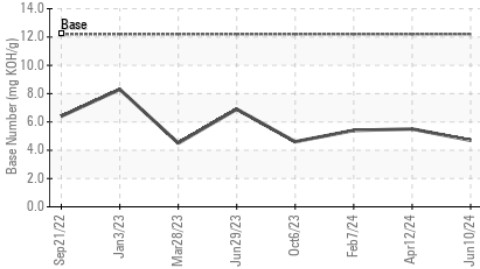


Non-ferrous Metals

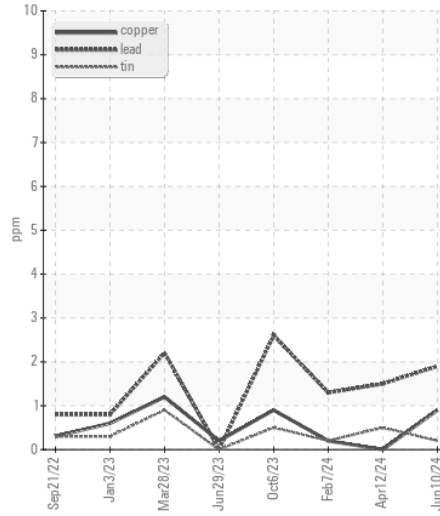


Viscosity @ 100°C

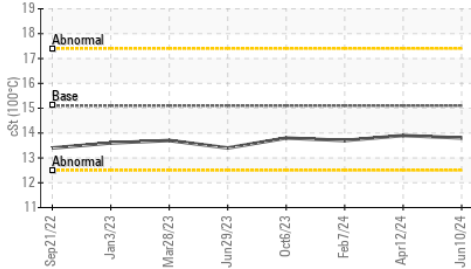

Viscosity @ 100°C

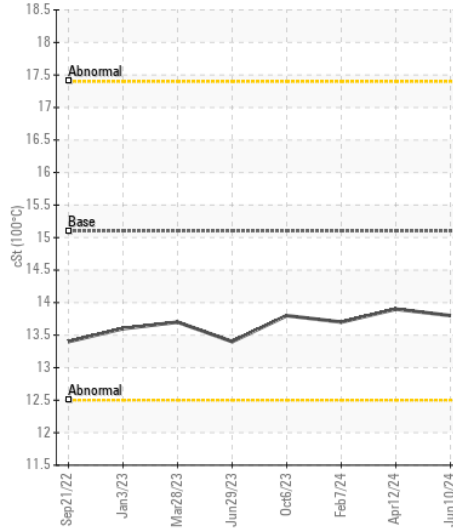

Base Number

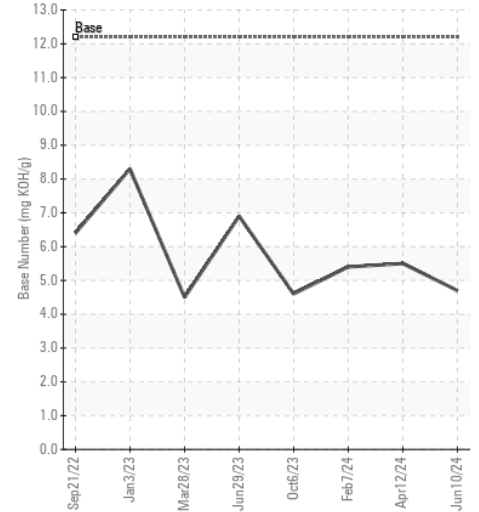

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0019712

Lab Number : 06216584

Unique Number : 11089448

Test Package : FLEET

Received : 21 Jun 2024

Tested : 24 Jun 2024

Diagnosed : 24 Jun 2024 - Wes Davis

RTL PACLEASE - 7005 - Arlington

1900 E Division

Arlington, TX

US 76011

Contact: Ricardo Ronquillo

ronquillor@rushenterprises.com

T: (469)203-8172

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)