



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
139489
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019722	RPL0007900	RPL0007709
Sample Date		Client Info		10 Jun 2024	30 May 2023	24 Feb 2023
Machine Age	mls	Client Info		68302	29930	22415
Oil Age	mls	Client Info		68302	29930	22415
Filter Age	mls	Client Info		68302	0	22415
Oil Changed		Client Info		Changed	N/A	Not Changd
Filter Changed		Client Info		Changed	N/A	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	70	80	56
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	<1	1	0
Titanium	ppm	ASTM D5185m		4	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>20	22	55	39
Lead	ppm	ASTM D5185m	>40	2	1	0
Copper	ppm	ASTM D5185m	>330	6	8	6
Tin	ppm	ASTM D5185m	>15	1	3	1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	17	15	12
Potassium	ppm	ASTM D5185m	>20	55	140	109
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.8	0.7	0.4
Nitration	Abs/cm	*ASTM D7624	>20	14.6	15.1	13.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	29.2	28.7	24.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	4	4
Boron	ppm	ASTM D5185m		34	27	27
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		99	45	41
Manganese	ppm	ASTM D5185m		1	3	2
Magnesium	ppm	ASTM D5185m		784	655	592
Calcium	ppm	ASTM D5185m		1721	1884	1678
Phosphorus	ppm	ASTM D5185m	1360	832	834	731
Zinc	ppm	ASTM D5185m	1480	1008	1067	955
Sulfur	ppm	ASTM D5185m		2823	3289	2717
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.6	29.9	24.5
Base Number (BN)	mg KOH/g	ASTM D2896	12.2	5.7	5.6	6.8
Visc @ 100°C	cSt	ASTM D445	15.1	14.8	14.1	13.5


FT-IR (Direct Trend)

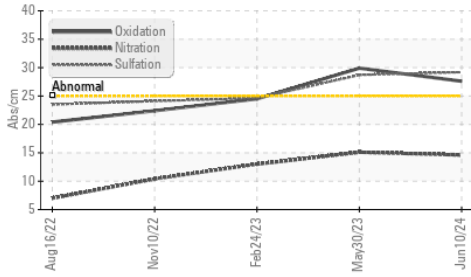


Base Number

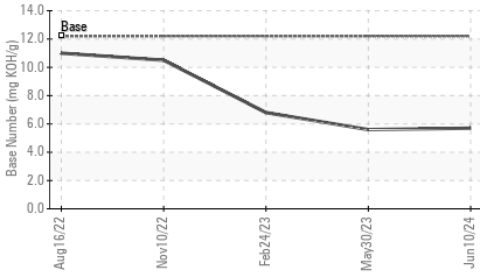


Viscosity @ 100°C

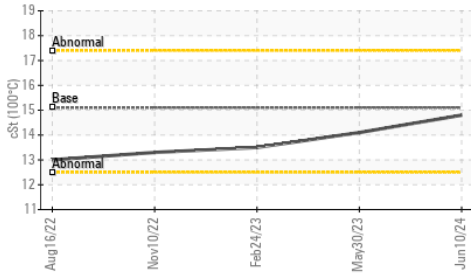


Ferrous Alloys

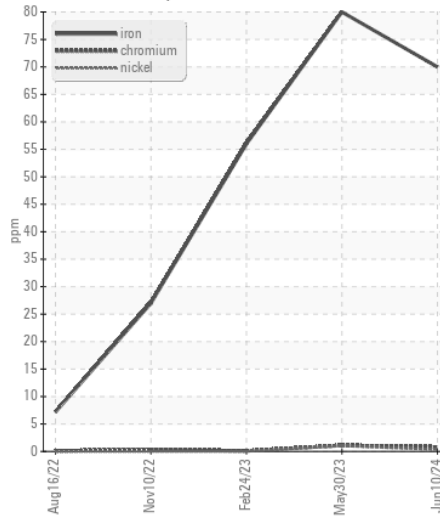


Non-ferrous Metals

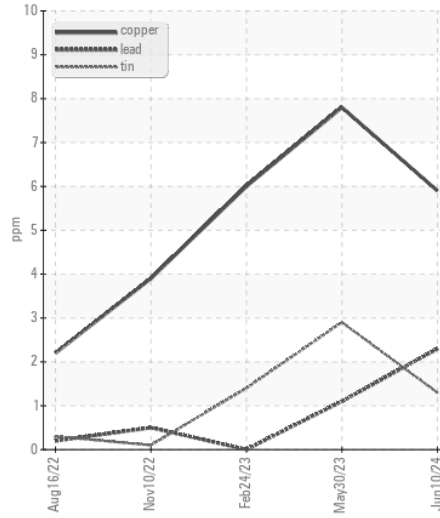

Viscosity @ 100°C

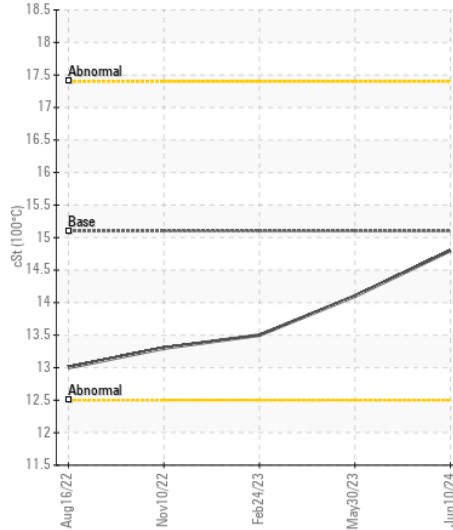

Base Number

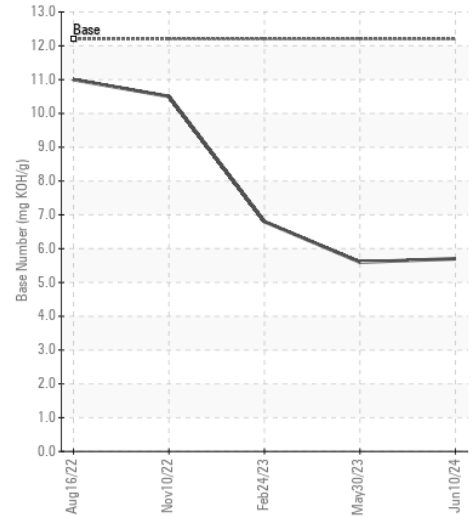

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0019722

Lab Number : 06216586

Unique Number : 11089450

Test Package : FLEET

Received : 21 Jun 2024

Tested : 24 Jun 2024

Diagnosed : 24 Jun 2024 - Sean Felton

RTL PACLEASE - 7005 - Arlington

1900 E Division

Arlington, TX

US 76011

Contact: Ricardo Ronquillo

ronquillor@rushenterprises.com

T: (469)203-8172

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)