



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont [RO# 151949]
Machine Id
JOHN DEERE 700K 1T0700KXKEE268175
Component
Diesel Engine
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050926	LEC0048500	LEC0017412
Sample Date		Client Info		14 Jun 2024	11 Jun 2024	09 Nov 2020
Machine Age	hrs	Client Info		3850	3850	2802
Oil Age	hrs	Client Info		1048	1048	2802
Filter Age	hrs	Client Info		1048	1048	2802
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	13	10	26
Chromium	ppm	ASTM D5185m	>11	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	4	5	3
Lead	ppm	ASTM D5185m	>26	0	0	0
Copper	ppm	ASTM D5185m	>26	2	1	1
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	7	7	7
Potassium	ppm	ASTM D5185m	>20	2	4	0
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.2	8.1	11.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.2	25.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	1	4	4
Boron	ppm	ASTM D5185m		243	228	33
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		261	240	31
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		857	836	275
Calcium	ppm	ASTM D5185m		1466	1459	2176
Phosphorus	ppm	ASTM D5185m		939	918	950
Zinc	ppm	ASTM D5185m		1138	1080	1134
Sulfur	ppm	ASTM D5185m		3061	3468	2880
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.7	15.6	18.8
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.1	9.0	6.3
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.4	13.9

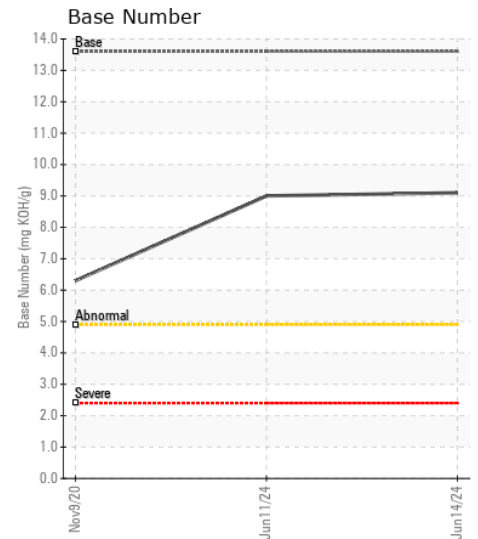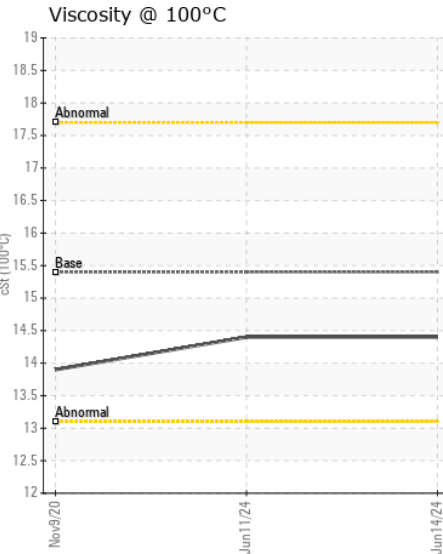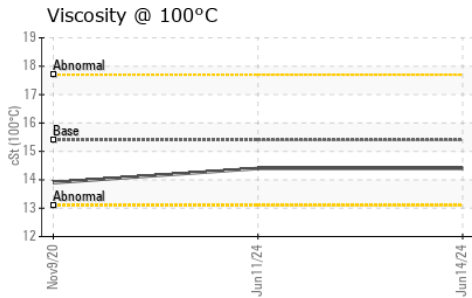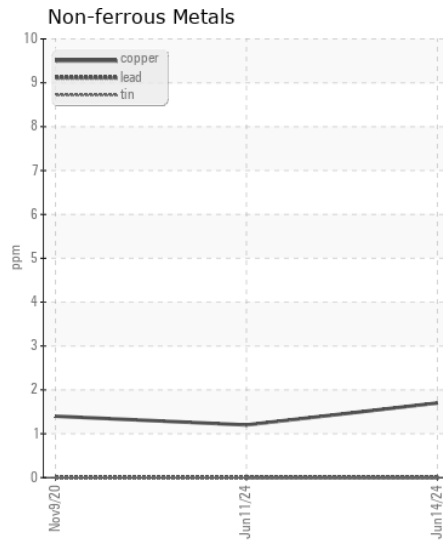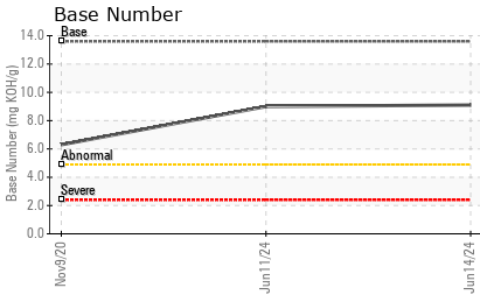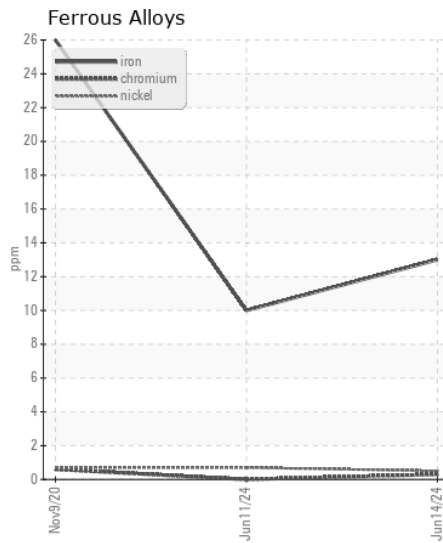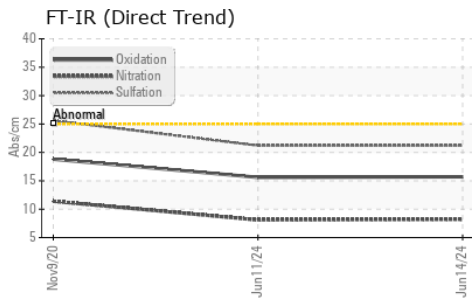

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050926 **Received** : 21 Jun 2024
Lab Number : 06216591 **Tested** : 24 Jun 2024
Unique Number : 11089455 **Diagnosed** : 24 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: (740)373-5570