



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
RP GETTLEFINGER (S/N TSJ00162)
Component
Port Main Engine
Fluid
CHEVRON DELO 400 XLE 15W40 (225 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0018906	MW0055926	MW0055936
Sample Date		Client Info		15 Jun 2024	11 Apr 2024	06 Feb 2024
Machine Age	hrs	Client Info		91200	89698	88240
Oil Age	hrs	Client Info		709	598	522
Filter Age	hrs	Client Info		709	598	522
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	7	4	4
Chromium	ppm	ASTM D5185m	>8	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>3	4	10	15
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	1	<1
Lead	ppm	ASTM D5185m	>18	0	0	0
Copper	ppm	ASTM D5185m	>80	6	2	<1
Tin	ppm	ASTM D5185m	>14	0	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	4	3	4
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		1.3	0.9	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.2	7.7	6.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	20.3	16.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	0	2
Boron	ppm	ASTM D5185m		293	180	90
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		71	45	30
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		523	690	725
Calcium	ppm	ASTM D5185m		1493	1537	1481
Phosphorus	ppm	ASTM D5185m	760	969	827	714
Zinc	ppm	ASTM D5185m	830	1182	966	815
Sulfur	ppm	ASTM D5185m	2770	3155	3450	2988
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	13.6	11.3
Base Number (BN)	mg KOH/g	ASTM D2896	10.7	8.1	8.4	7.1
Visc @ 100°C	cSt	ASTM D445	14.9	14.8	14.9	14.8

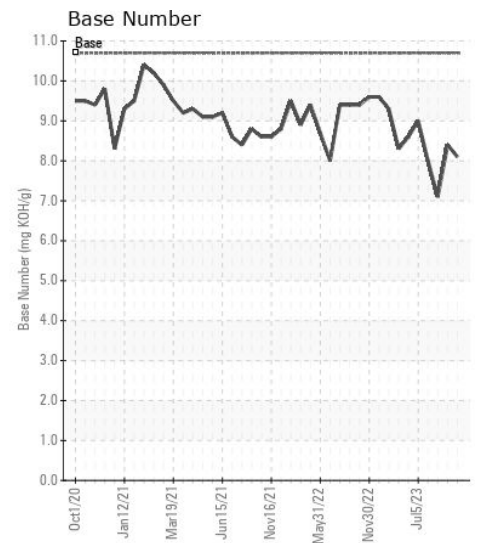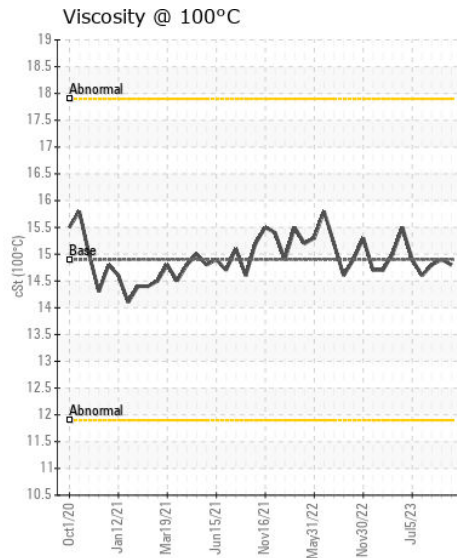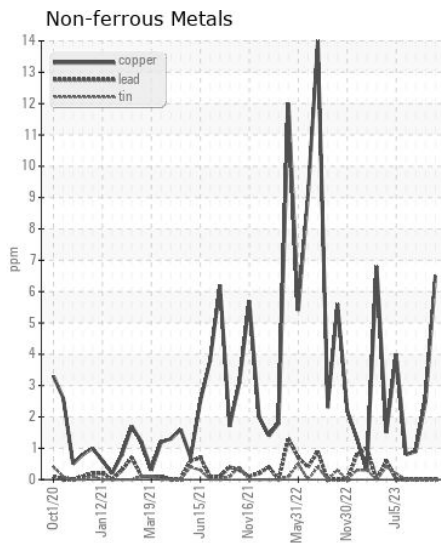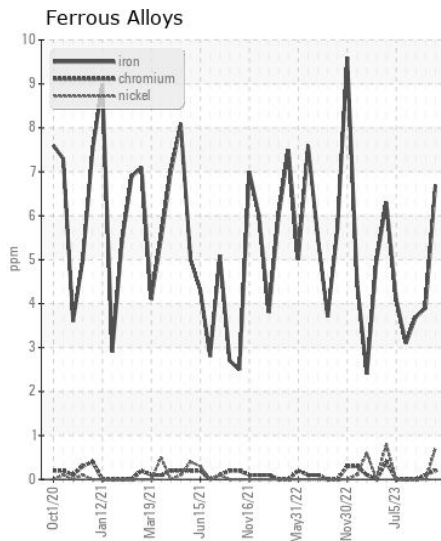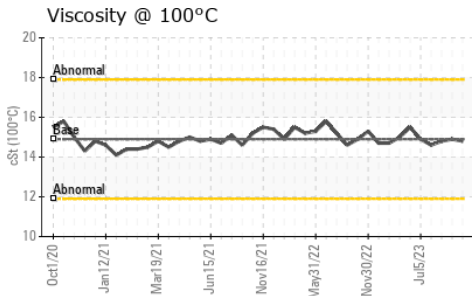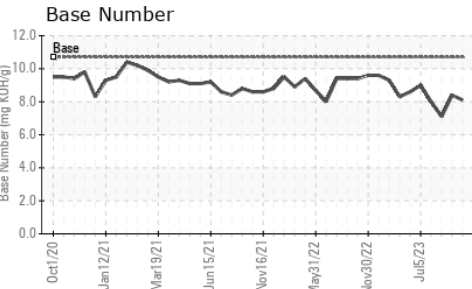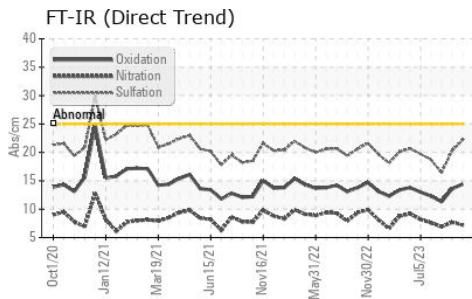

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : MW0018906
 Lab Number : 06216605
 Unique Number : 11089469
 Test Package : MAR 2

Received : 21 Jun 2024
 Tested : 24 Jun 2024
 Diagnosed : 24 Jun 2024 - Sean Felton

AMERICAN COMMERCIAL LINES
 PO BOX 610, 1701 E. MARKET STREET
 JEFFERSONVILLE, IN
 US 47130
 Contact: RONALD SCHNEIDER
 ronald.schneider@bargaeacbl.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (812)288-1644