



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

## Mobile Fleet

Machine Id

### 8045 8045

Component

## Diesel Engine

Fluid

### DIESEL ENGINE OIL SAE 10W30 (8 GAL)

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0947747</b>	WC0939331	WC0902935
Sample Date		Client Info		<b>19 Jun 2024</b>	09 May 2024	09 Feb 2024
Machine Age	hrs	Client Info		<b>14776</b>	1406	1167
Oil Age	hrs	Client Info		<b>537</b>	243	289
Filter Age	hrs	Client Info		<b>537</b>	243	289
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>47</b>	35	25
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>13</b>	8	16
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>56</b>	19	44
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	<b>8</b>	6	8
Potassium	ppm	ASTM D5185m	>20	<b>29</b>	16	38
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	7.3	8.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>22.6</b>	22.1	22.5
Particles >4µm		ASTM D7647	>20000	<b>6055</b>	5742	5037
Particles >6µm		ASTM D7647	>5000	<b>6298</b>	3128	2744
Particles >14µm		ASTM D7647	>640	<b>561</b>	532	467
Particles >21µm		ASTM D7647	>160	<b>189</b>	179	157
Particles >38µm		ASTM D7647	>40	<b>29</b>	28	24
Particles >71µm		ASTM D7647	>10	<b>3</b>	3	2
Oil Cleanliness		ISO 4406 (c)	>21/19/16	<b>20/19/16</b>	20/19/16	20/19/16
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	2	0
Boron	ppm	ASTM D5185m	250	<b>29</b>	43	37
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>49</b>	47	56
Manganese	ppm	ASTM D5185m		<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>567</b>	547	520
Calcium	ppm	ASTM D5185m	3000	<b>1806</b>	1834	1630
Phosphorus	ppm	ASTM D5185m	1150	<b>788</b>	797	700
Zinc	ppm	ASTM D5185m	1350	<b>991</b>	982	949
Sulfur	ppm	ASTM D5185m	4250	<b>2650</b>	2909	2142
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>21.6</b>	19.9	21.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>8.1</b>	9.2	8.1
Visc @ 100°C	cSt	ASTM D445	10.9	<b>11.6</b>	11.4	11.5

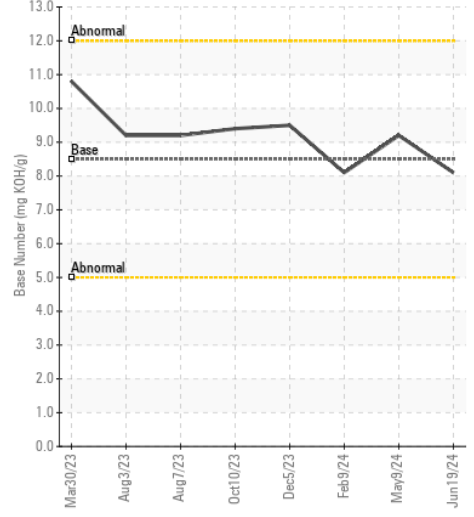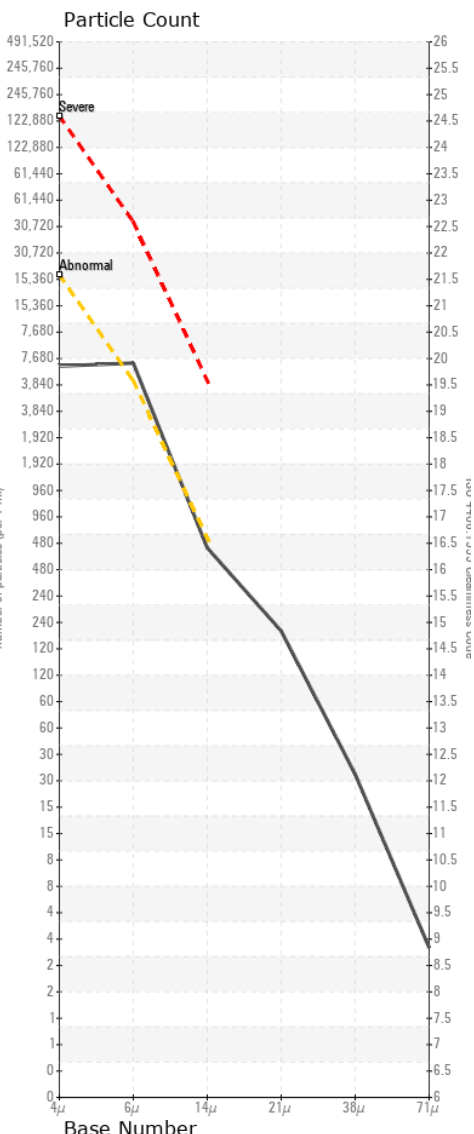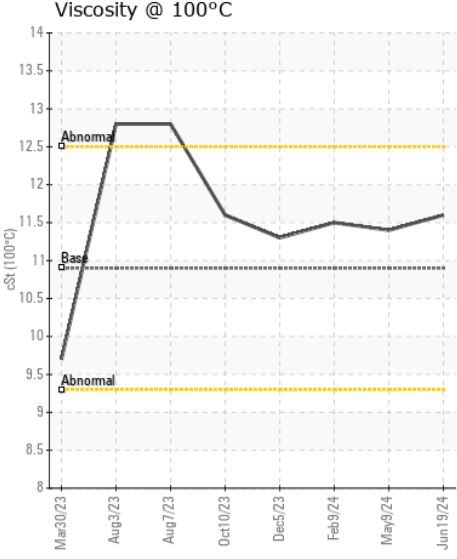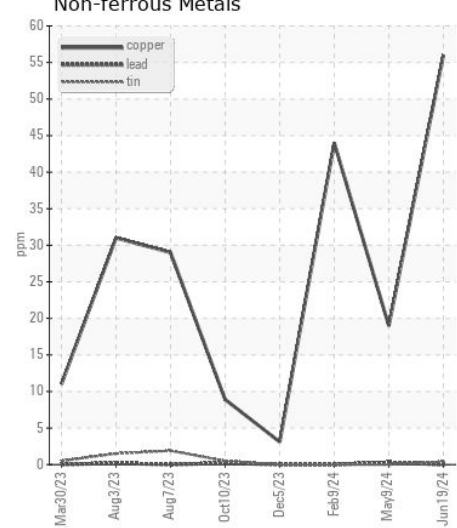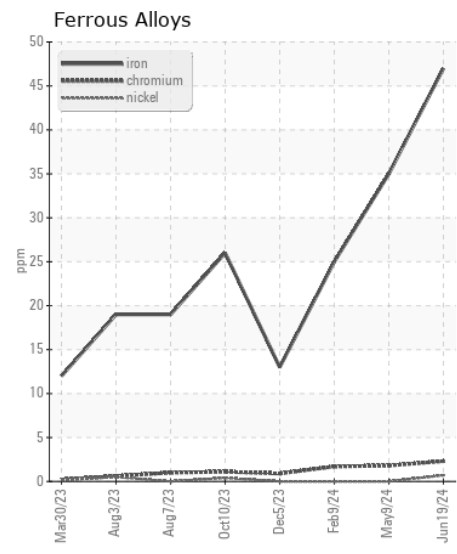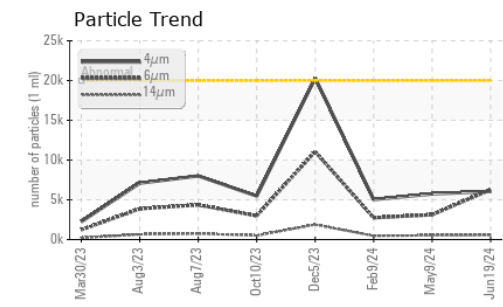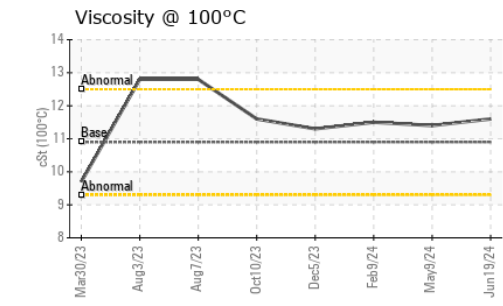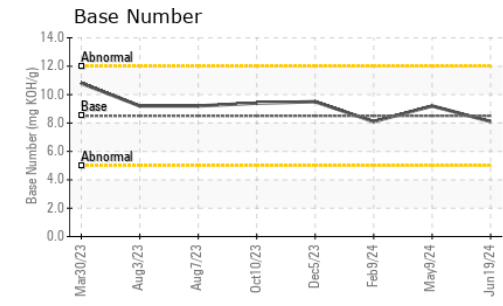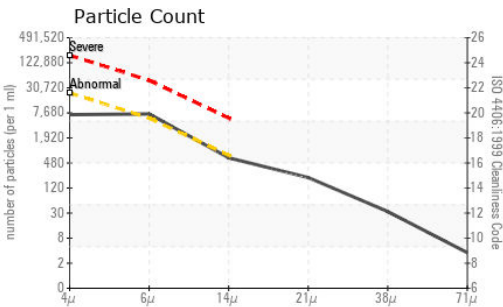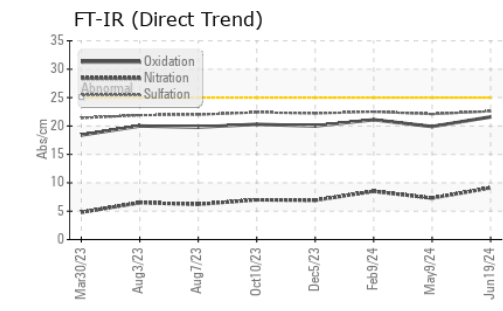

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0947747 **Received** : 21 Jun 2024  
**Lab Number** : 06216748 **Tested** : 10 Jul 2024  
**Unique Number** : 11089612 **Diagnosed** : 10 Jul 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PrtCount, TBN )

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509  
 Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)