



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL

Machine Id
JOHN DEERE 85G 1FF085GXPKJ021173
 Component
Hydraulic System
 Fluid
HITACHI HYDRAULIC SUPER EX 46HN (--- QTS)

RECOMMENDATION

Recommend drain oil if not already done. Reduce drain interval to 2000 hours or drain and flush and use recommended zinc free oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212039	JR0199939	JR0180453
Sample Date		Client Info		20 Jun 2024	13 Feb 2024	12 Oct 2023
Machine Age	hrs	Client Info		6490	6026	5448
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Changed	Not Chngd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	22	16	15
Iron	ppm	ASTM D5185m	>32	7	9	9
Chromium	ppm	ASTM D5185m	>9	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>9	3	<1	<1
Lead	ppm	ASTM D5185m	>28	<1	0	0
Copper	ppm	ASTM D5185m	>50	4	4	4
Tin	ppm	ASTM D5185m	>5	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>11	6	3	3
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	4467	5561	3654
Particles >6µm		ASTM D7647	>20000	1079	1420	994
Particles >14µm		ASTM D7647	>640	42	124	83
Particles >21µm		ASTM D7647	>160	4	28	23
Particles >38µm		ASTM D7647	>40	0	2	1
Particles >71µm		ASTM D7647	>10	0	0	0
Oil Cleanliness		ISO 4406 (c)	>23/21/16	19/17/13	20/18/14	19/17/14
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

Zinc level above manufacturer's recommendations. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m	>21	<1	2	2
Boron	ppm	ASTM D5185m		45	12	14
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		1	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		15	6	6
Calcium	ppm	ASTM D5185m		1645	687	730
Phosphorus	ppm	ASTM D5185m	827	907	674	683
Zinc	ppm	ASTM D5185m	0	▲ 809	▲ 304	▲ 298
Sulfur	ppm	ASTM D5185m	13	3558	1759	1792
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	0.68	0.39	0.30
Visc @ 40°C	cSt	ASTM D445	47	51.5	50.3	50.3

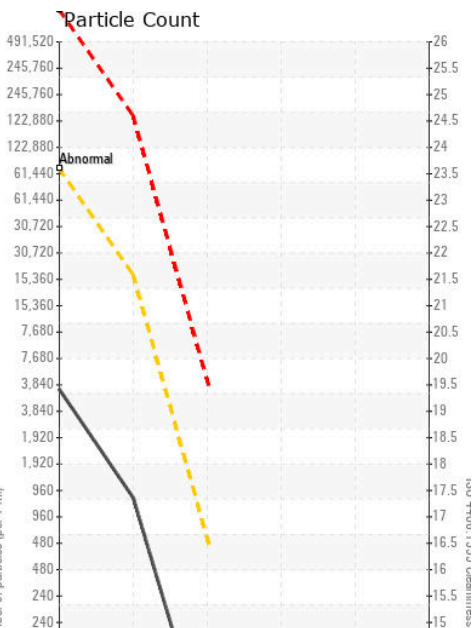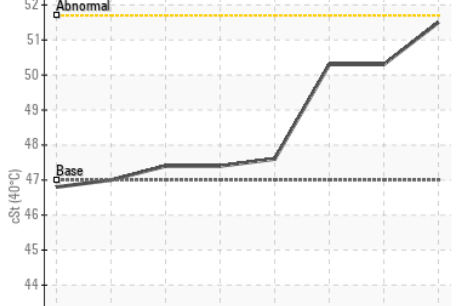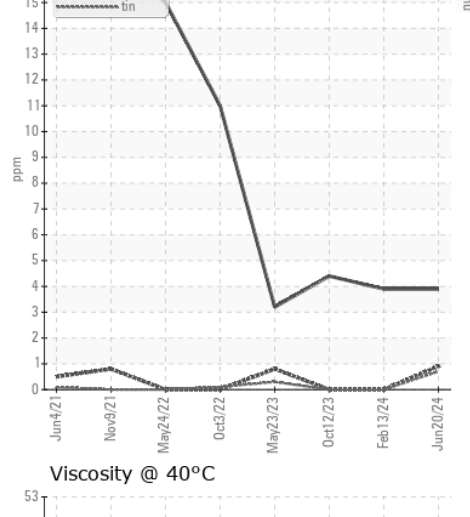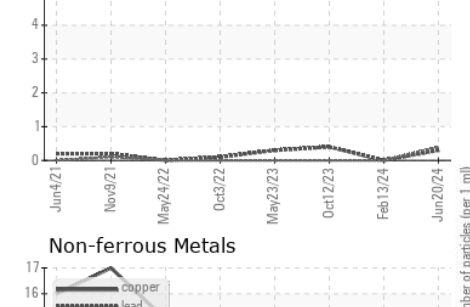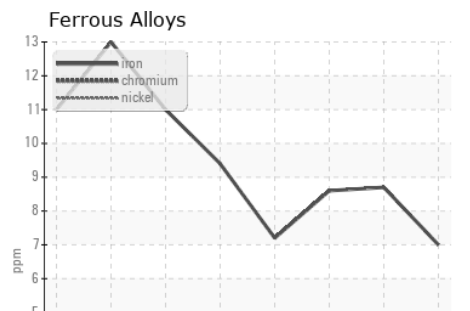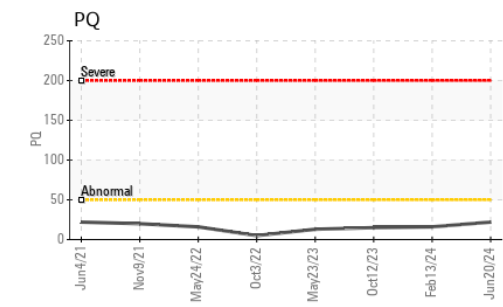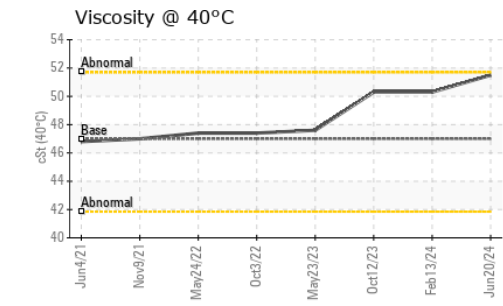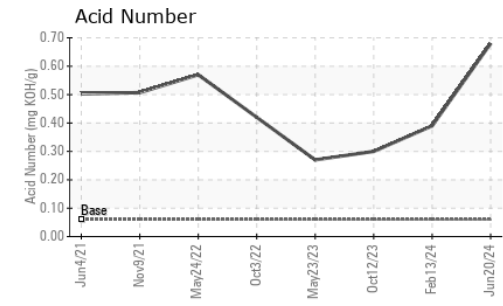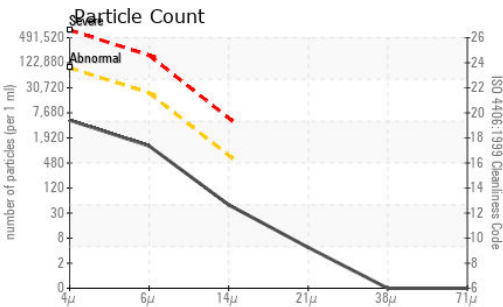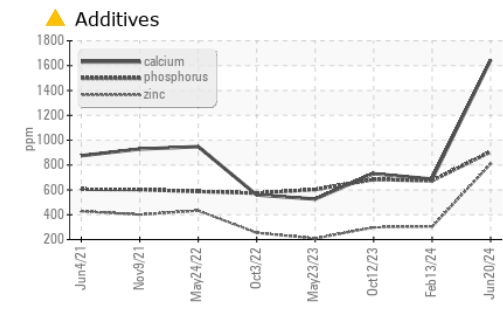

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212039
Lab Number : 06216760
Unique Number : 11089624
Test Package : CONST (Additional Tests: PQ)
Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Don Baldrige

J.E. LIESFELD CONTRACTOR
 1851 BENNINGTON RD
 ROCKVILLE, VA
 US 23146
 Contact: CIELO NAVA-OVALLE
 cielo@liesfeld.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)