



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[SPM729125]
 Machine Id
VOLVO L90H 625106
 Component
Hydraulic System
 Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP444415	VCP414540	VCP354498
Sample Date		Client Info		10 Jun 2024	12 Oct 2023	22 Aug 2023
Machine Age	hrs	Client Info		6517	5121	4106
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	SEVERE	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	4	4	9
Chromium	ppm	ASTM D5185m	>20	1	2	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		<1	0	0
Aluminum	ppm	ASTM D5185m	>20	3	0	0
Lead	ppm	ASTM D5185m	>20	1	0	2
Copper	ppm	ASTM D5185m	>20	2	1	2
Tin	ppm	ASTM D5185m	>20	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	2	1	2
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	1470	▲ 98150	● 8064
Particles >6µm		ASTM D7647	>1300	353	▲ 35107	● 1488
Particles >14µm		ASTM D7647	>160	9	▲ 2118	53
Particles >21µm		ASTM D7647	>40	1	▲ 377	11
Particles >38µm		ASTM D7647	>10	0	5	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/10	▲ 24/22/18	● 20/18/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	0	0
Boron	ppm	ASTM D5185m	14	0	0	0
Barium	ppm	ASTM D5185m	0.0	1	0	2
Molybdenum	ppm	ASTM D5185m	0.0	<1	0	<1
Manganese	ppm	ASTM D5185m	0.0	<1	<1	0
Magnesium	ppm	ASTM D5185m	2.6	2	6	3
Calcium	ppm	ASTM D5185m	49	40	44	57
Phosphorus	ppm	ASTM D5185m	354	395	427	526
Zinc	ppm	ASTM D5185m	419	478	561	672
Sulfur	ppm	ASTM D5185m	3719	1225	1871	2485
Acid Number (AN)	mg KOH/g	ASTM D8045		0.30	0.32	0.37
Visc @ 40°C	cSt	ASTM D445	46	41.8	42.4	42.6

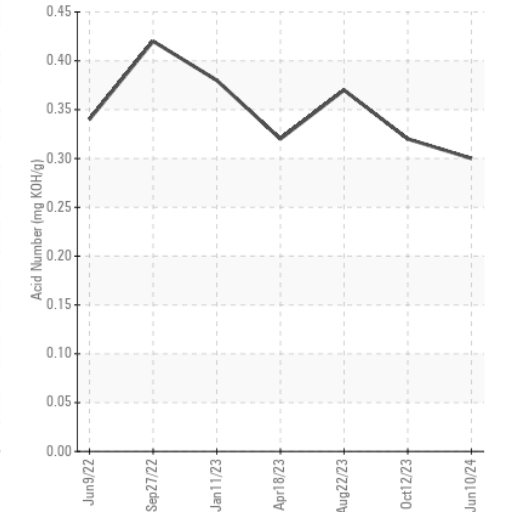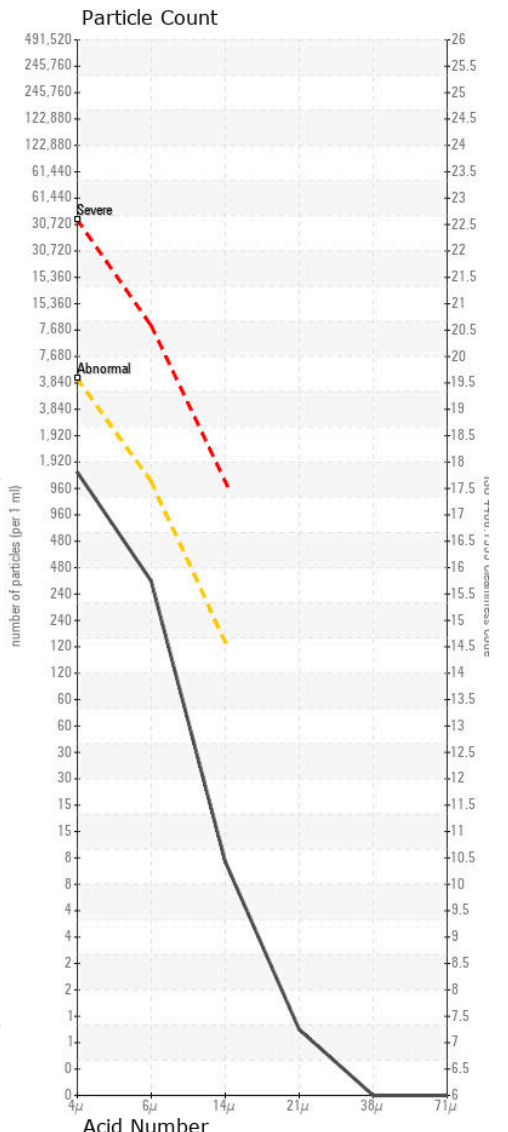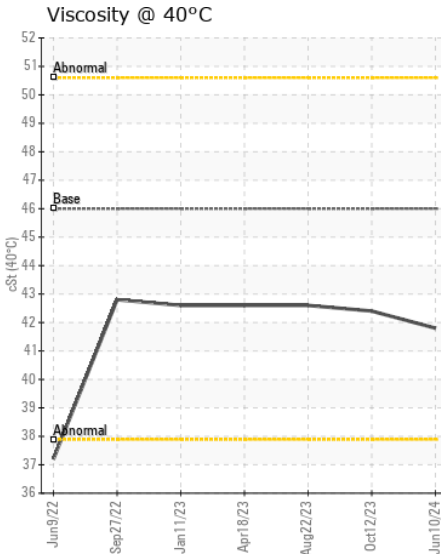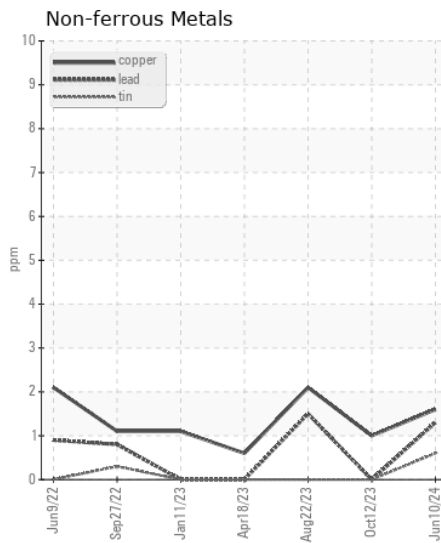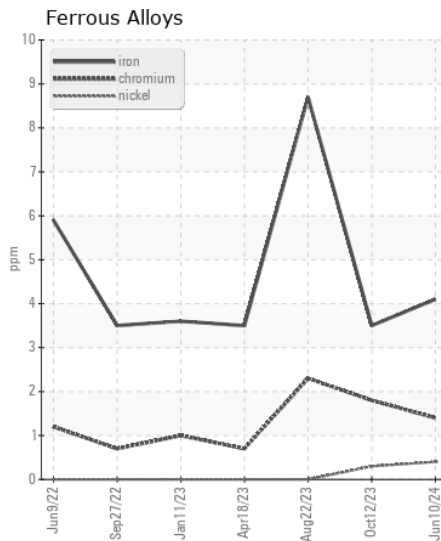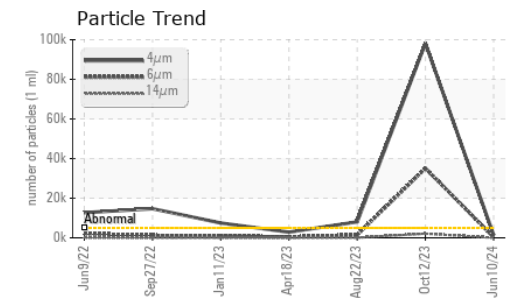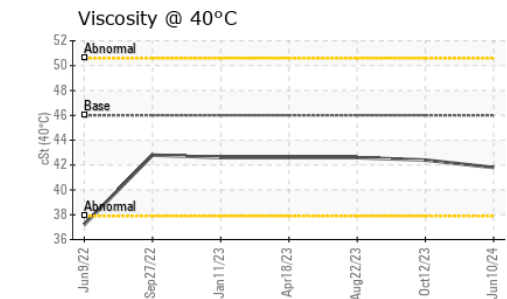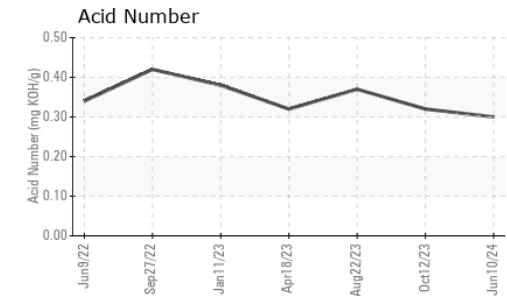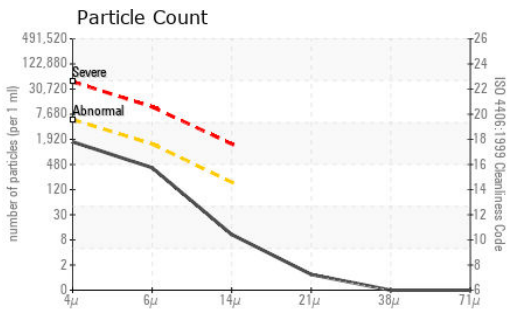

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP444415
Lab Number : 06216788
Unique Number : 11089652
Test Package : MOB 2

Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Wes Davis

UNITED SCRAP
 1545 S CICERO AVE
 CICERO, IL
 US 60804

Contact: RON LUCHTENBURG
 rluchten@unitedscrap.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: