



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
015-R014
Component
Hydraulic System
Fluid
SCHAEFFER 315 SIMPLEX SUPREME (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868312	WC0698150	WC0548372
Sample Date		Client Info		18 Jun 2024	03 Oct 2022	14 Apr 2022
Machine Age	hrs	Client Info		7393	21160	20124
Oil Age	hrs	Client Info		20124	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	2	11	19
Chromium	ppm	ASTM D5185m	>10	<1	9	▲ 12
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		<1	0	<1
Aluminum	ppm	ASTM D5185m	>10	3	1	2
Lead	ppm	ASTM D5185m	>10	1	0	0
Copper	ppm	ASTM D5185m	>75	21	4	7
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	5	0	8
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	946	▲ 159676	▲ 76639
Particles >6µm		ASTM D7647	>1300	271	▲ 27983	1018
Particles >14µm		ASTM D7647	>160	15	75	44
Particles >21µm		ASTM D7647	>40	2	18	9
Particles >38µm		ASTM D7647	>10	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/15/11	▲ 24/22/13	▲ 23/17/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	3	4
Boron	ppm	ASTM D5185m	100	5	36	64
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m	0	2	158	28
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	22	12	23
Calcium	ppm	ASTM D5185m	4300	1957	994	2447
Phosphorus	ppm	ASTM D5185m	1400	983	724	935
Zinc	ppm	ASTM D5185m	1700	1154	710	971
Sulfur	ppm	ASTM D5185m	3800	3397	4382	4733
Acid Number (AN)	mg KOH/g	ASTM D8045	0.25	0.92	0.89	0.78
Visc @ 40°C	cSt	ASTM D445	59	64.7	46.0	45.8

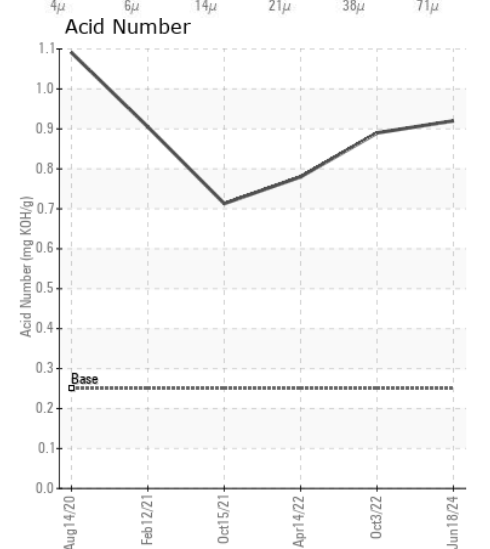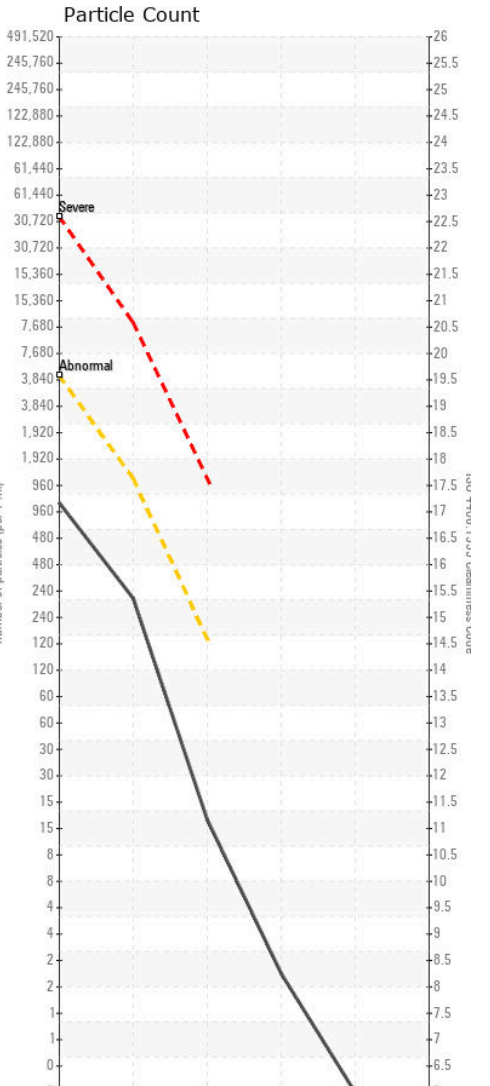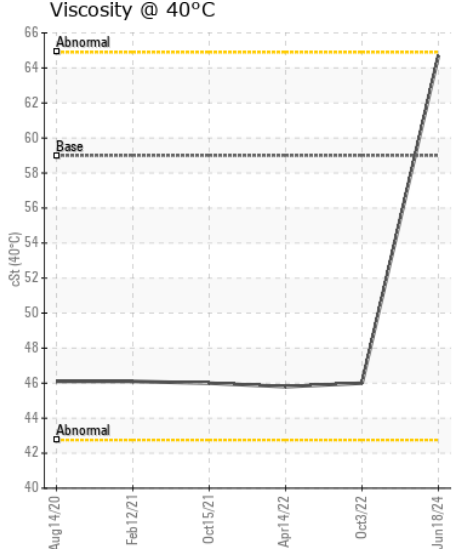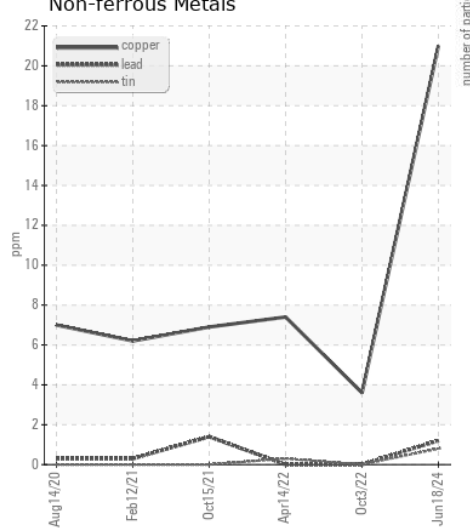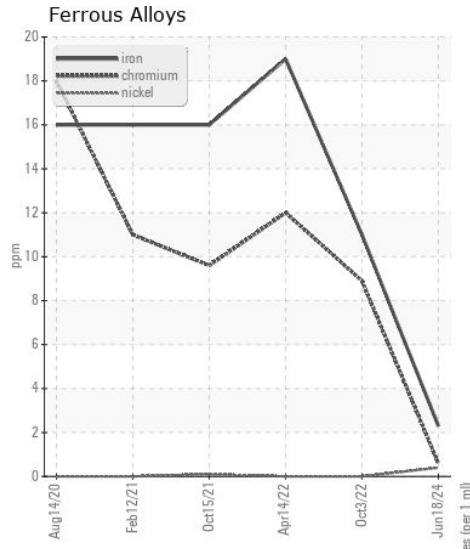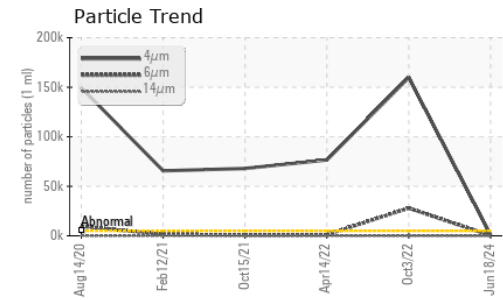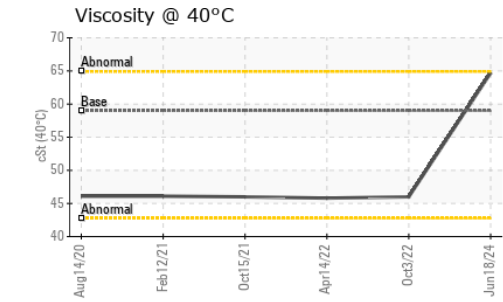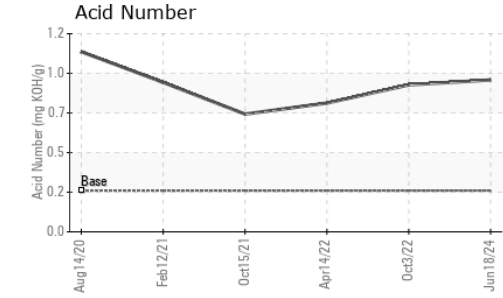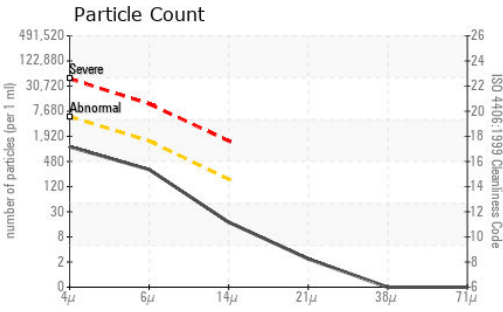

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868312 **Received** : 21 Jun 2024
Lab Number : 06216794 **Tested** : 24 Jun 2024
Unique Number : 11089658 **Diagnosed** : 24 Jun 2024 - Wes Davis
Test Package : CONST

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)