



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

QUINSYN

Machine Id

QUINCY CAI973616 - CALIBER COLLISION 1731

Component

Compressor

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCH06216960	UCH06127952	---
Sample Date		Client Info		23 May 2024	20 Mar 2024	---
Machine Age	hrs	Client Info		36389	35501	---
Oil Age	hrs	Client Info		8000	0	---
Filter Age	hrs	Client Info		2000	0	---
Oil Changed		Client Info		Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	0	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m		0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	0	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	0	<1	---
Tin	ppm	ASTM D5185m	>15	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<1	<1	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		0	<1	---
Calcium	ppm	ASTM D5185m		0	<1	---
Phosphorus	ppm	ASTM D5185m		12	5	---
Zinc	ppm	ASTM D5185m		4	0	---
Sulfur	ppm	ASTM D5185m		33	29	---
Acid Number (AN)	mg KOH/g	ASTM D8045	.10	0.46	0.37	---
Visc @ 40°C	cSt	ASTM D445	44.6	49.1	49.6	---

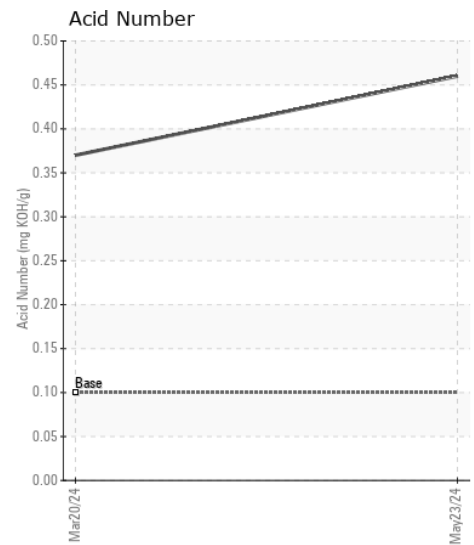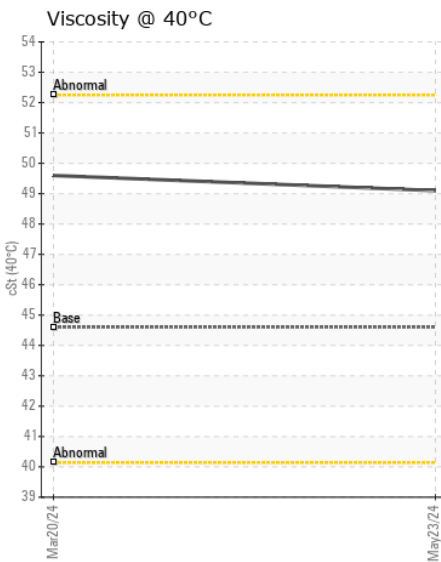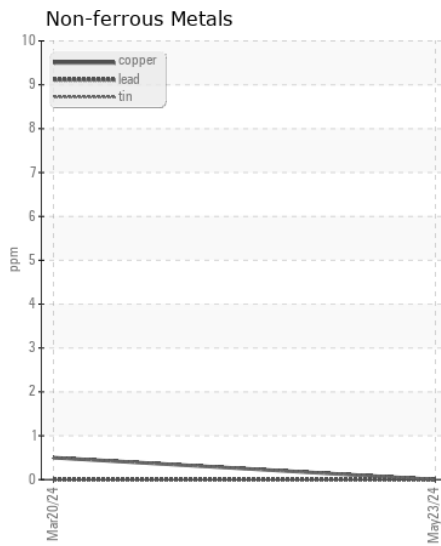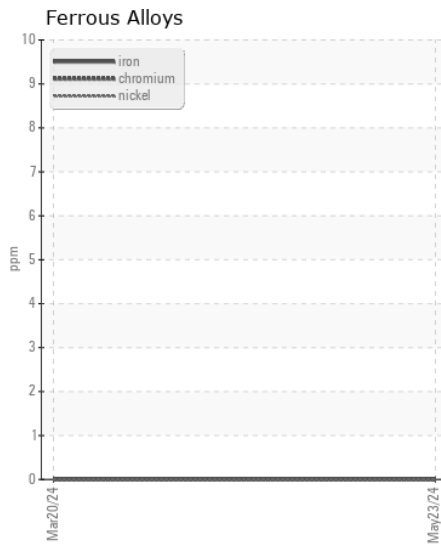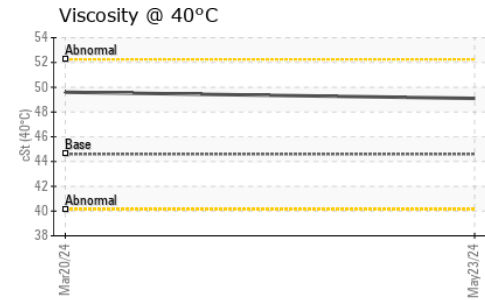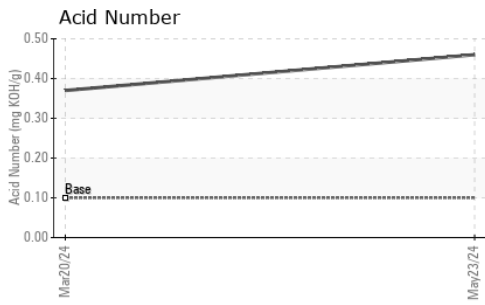

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : UCH06216960

Lab Number : 06216960

Unique Number : 11089824

Test Package : IND 2

Received : 21 Jun 2024

Tested : 24 Jun 2024

Diagnosed : 24 Jun 2024 - Sean Felton

TATE ENGINEERING

8131 VIRGINIA PINE CT

RICHMOND, VA

US 23237

Contact: KEITH GLEASON

KEITH.GLEASON@TATE.COM

T:

F: (804)743-0415

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)