



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
PALEXTRA 44
Machine Id
SULLIVAN PALATEK 19KE000551 - CORR CHOICE COMP 2
Component
Compressor

RECOMMENDATION

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCS06217014	UCS06160522	UCS06104430
Sample Date		Client Info		16 Jun 2024	20 Apr 2024	24 Feb 2024
Machine Age	hrs	Client Info		41202	39835	38491
Oil Age	hrs	Client Info		200	850	3000
Filter Age	hrs	Client Info		200	850	1500
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	0	<1	0
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m		0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	2	0
Lead	ppm	ASTM D5185m	>25	0	<1	<1
Copper	ppm	ASTM D5185m	>50	4	3	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>25	1	3	1
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	MODER	MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	<1	<1
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	0.3	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m	0.3	<1	<1	0
Magnesium	ppm	ASTM D5185m	0.4	<1	<1	0
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	689	661	474	428
Zinc	ppm	ASTM D5185m	0	0	0	0
Sulfur	ppm	ASTM D5185m	1237	1213	715	364
Acid Number (AN)	mg KOH/g	ASTM D8045	0.135	0.13	0.73	▲ 2.04
Visc @ 40°C	cSt	ASTM D445	44.62	41.9	43.8	44.6

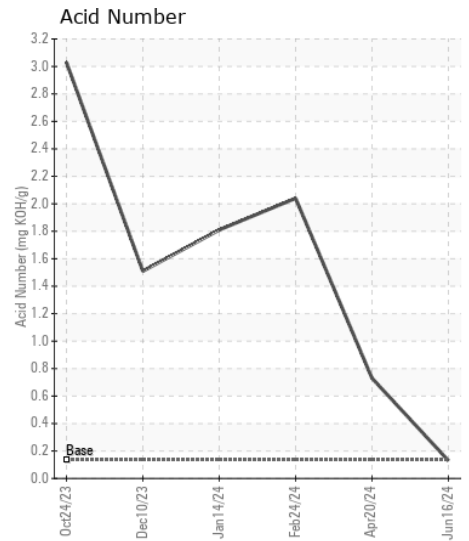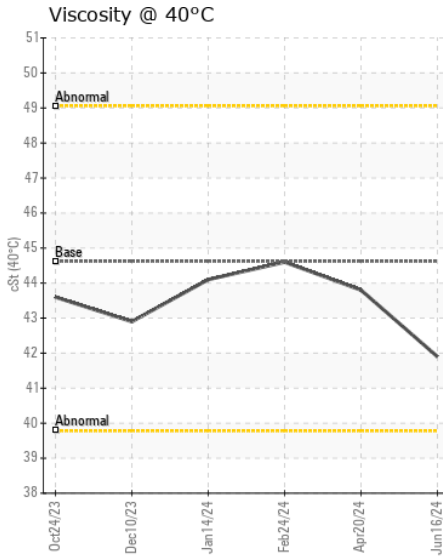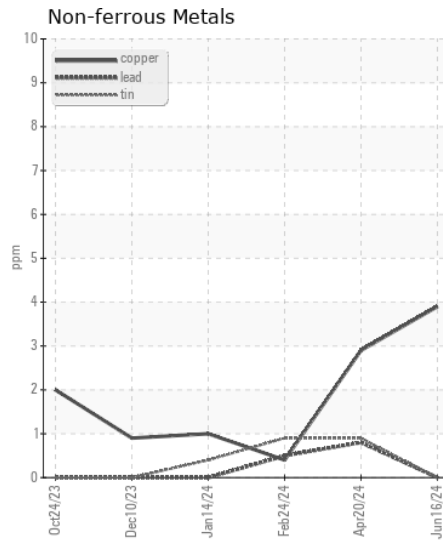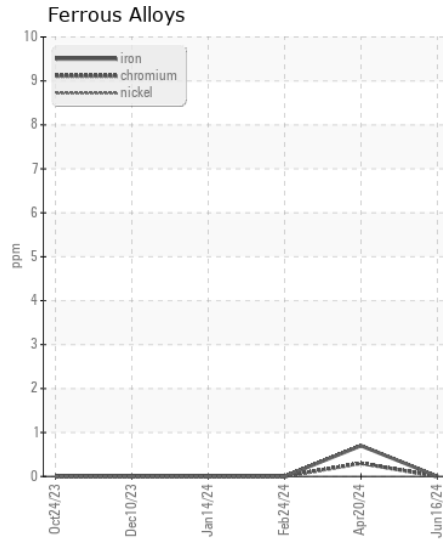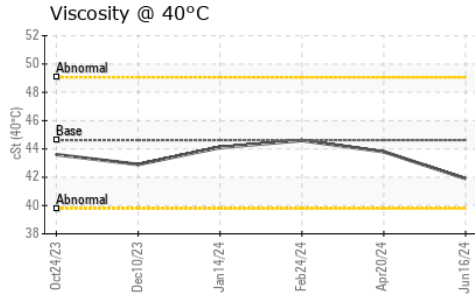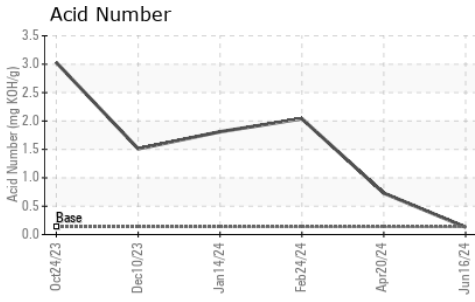

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : UCS06217014 **Received** : 21 Jun 2024
Lab Number : 06217014 **Tested** : 24 Jun 2024
Unique Number : 11089878 **Diagnosed** : 24 Jun 2024 - Sean Felton
Test Package : IND 2

DOWNFORCE AIR SOLUTIONS
 30 N 5TH ST
 LEMOYNE, PA
 US 17043

Contact: ANDREW HOGUE
 andrewh@downforceair.com
 T: (717)891-3758

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: