



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
BLACKBURN LOGGING [A35658]
 Machine Id
JOHN DEERE 643L II 1DW643LBKPL717978
 Component
Rear Differential
 Fluid
JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: A35658)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007631	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	hrs	Client Info		535	---	---
Oil Age	hrs	Client Info		535	---	---
Filter Age	hrs	Client Info		535	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		54	---	---
Iron	ppm	ASTM D5185m	>500	103	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	2	---	---
Copper	ppm	ASTM D5185m	>100	12	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m		4	---	---
Barium	ppm	ASTM D5185m		10	---	---
Molybdenum	ppm	ASTM D5185m		6	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		130	---	---
Calcium	ppm	ASTM D5185m		3860	---	---
Phosphorus	ppm	ASTM D5185m		1120	---	---
Zinc	ppm	ASTM D5185m		1333	---	---
Sulfur	ppm	ASTM D5185m		4396	---	---
Visc @ 40°C	cSt	ASTM D445	59	55.5	---	---

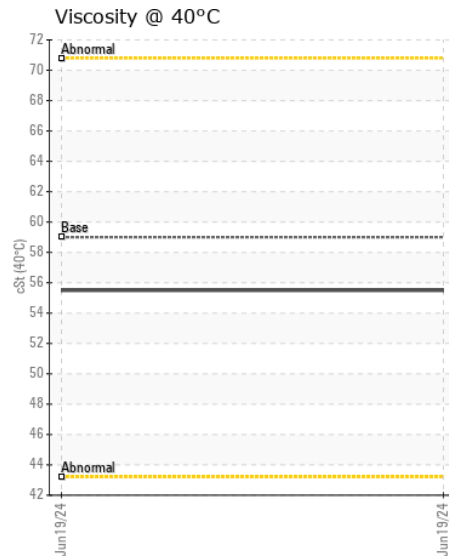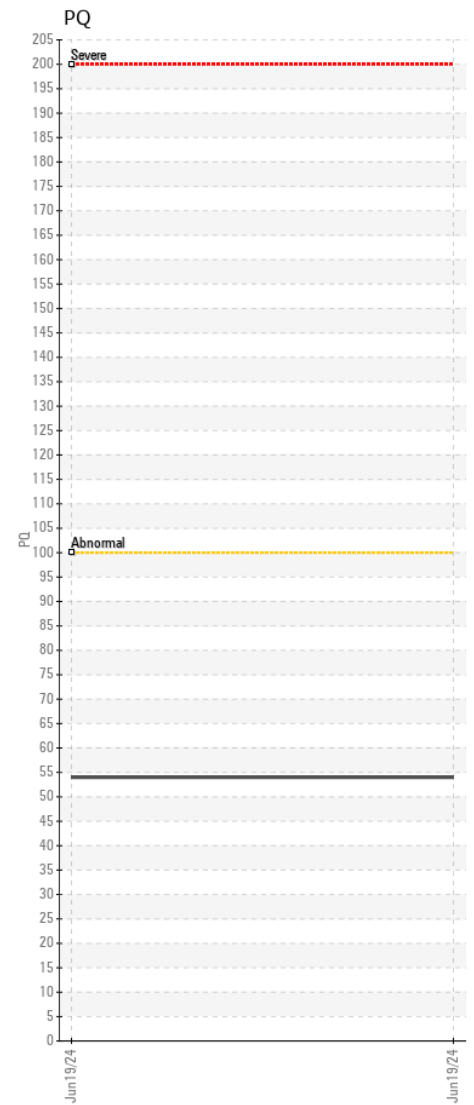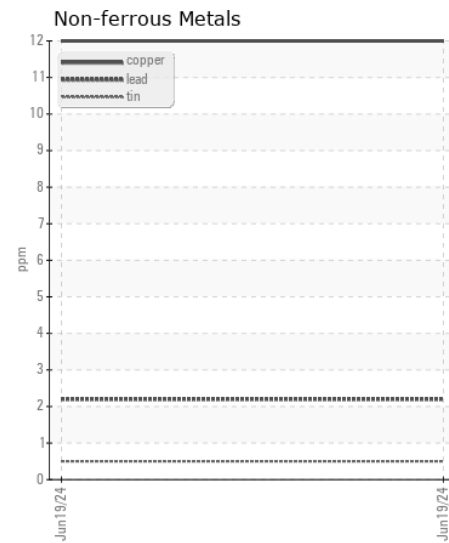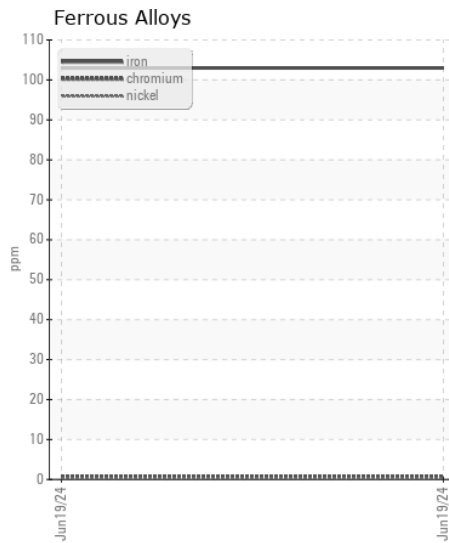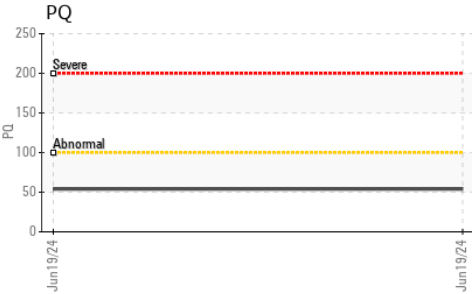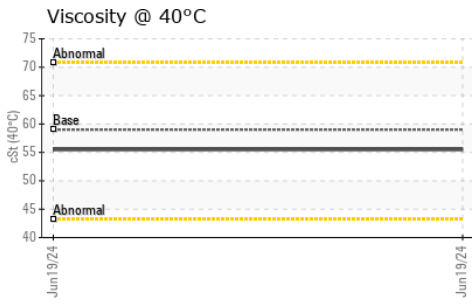

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007631

Lab Number : 06217085

Unique Number : 11089949

Test Package : CONST (Additional Tests: PQ)

Received : 21 Jun 2024

Tested : 24 Jun 2024

Diagnosed : 24 Jun 2024 - Sean Felton

WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE

25135 ONE AVIATION WAY SW

MADISON, AL

US 35756

Contact: BOBBY LUCKY

warriorparts033@gmail.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)