



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
DEISTER 14028
 Component
Upper Gearbox
 Fluid
SHELL MORLINA OIL ISO 220 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | WC0851694 | WC0851704 | WC0746922 |
| Sample Date | | Client Info | | 14 Jun 2024 | 19 Jan 2024 | 05 Sep 2023 |
| Machine Age | hrs | Client Info | | 30852 | 29654 | 29388 |
| Oil Age | hrs | Client Info | | 0 | 500 | 500 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >200 | 23 | 38 | 48 |
| Chromium | ppm | ASTM D5185m | >10 | <1 | 0 | <1 |
| Nickel | ppm | ASTM D5185m | >10 | 0 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >25 | 1 | <1 | 1 |
| Lead | ppm | ASTM D5185m | >50 | 0 | <1 | 2 |
| Copper | ppm | ASTM D5185m | >200 | 3 | 4 | 6 |
| Tin | ppm | ASTM D5185m | >10 | 0 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >50 | 5 | 4 | 4 |
| Potassium | ppm | ASTM D5185m | >20 | 1 | 0 | <1 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-----|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | <1 | <1 | 0 |
| Boron | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| Calcium | ppm | ASTM D5185m | | 0 | 1 | 0 |
| Phosphorus | ppm | ASTM D5185m | | 5 | 15 | 2 |
| Zinc | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Sulfur | ppm | ASTM D5185m | | 9017 | 6921 | 7635 |
| Visc @ 40°C | cSt | ASTM D445 | 220 | 213 | 209 | 212 |

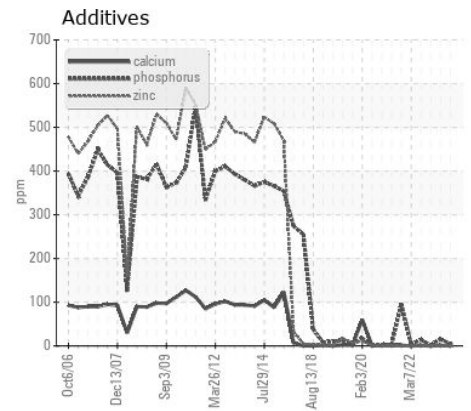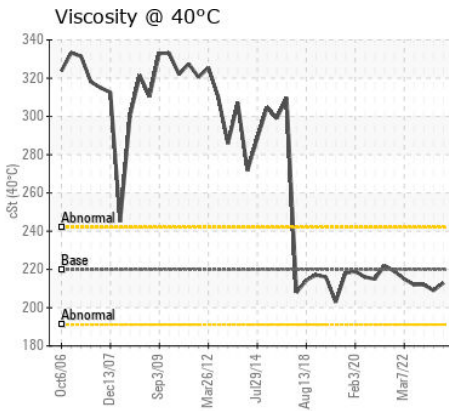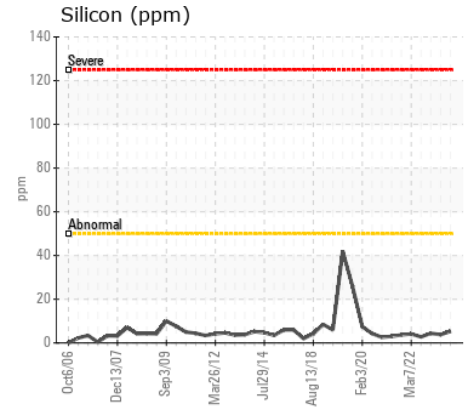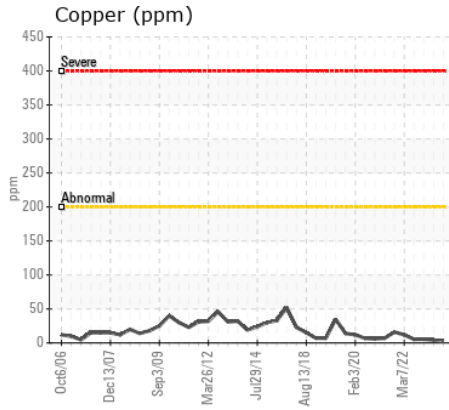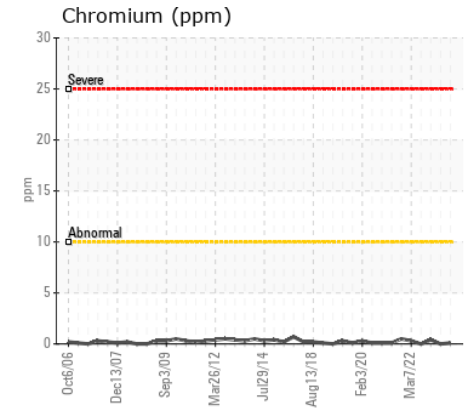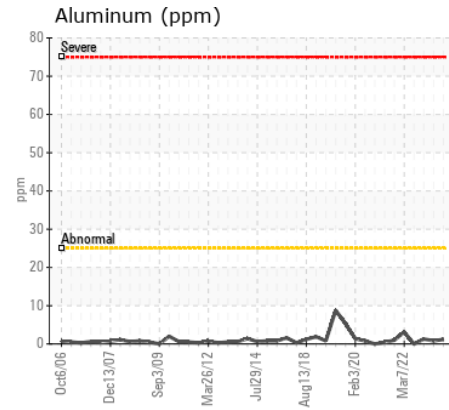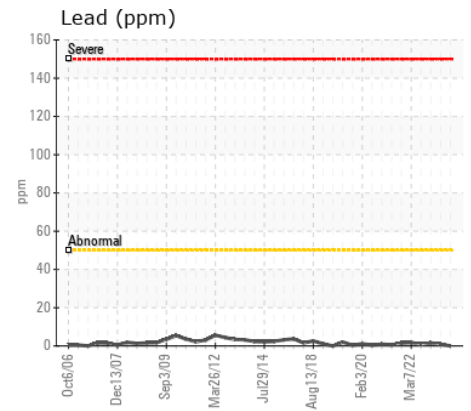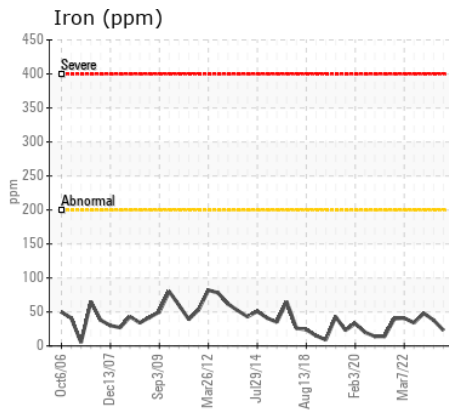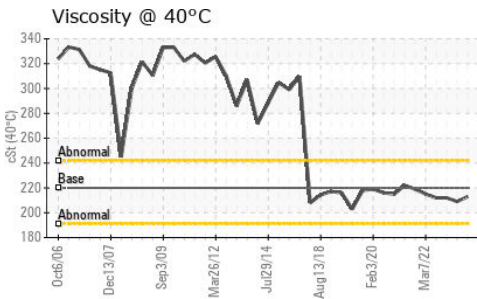

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0851694
Lab Number : 06217148
Unique Number : 11090012
Test Package : MOB 1

Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Wes Davis

WAKE STONE CORPORATION - BATTLEBORO
 NASH CO. QUARRY, 7379 N. HALIFAX RD.
 BATTLEBORO, NC
 US 27809
 Contact: WAYNE HILL
 waynehill@wakestonecorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: