



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**R&M DD-5-29 C0144 - EAST BRIDGE (S/N 1695709506)**

Component  
**Gearbox**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DC0036839</b>	DC0029165	---
Sample Date		Client Info		<b>06 Jun 2024</b>	30 May 2023	---
Machine Age	hrs	Client Info		<b>0</b>	0	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	Not Changd	---
Sample Status				<b>NORMAL</b>	NORMAL	---
Iron	ppm	ASTM D5185m	>200	<b>26</b>	11	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>200	<b>10</b>	7	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silicon	ppm	ASTM D5185m	>50	<b>7</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Sodium	ppm	ASTM D5185m		<b>10</b>	<1	---
Boron	ppm	ASTM D5185m		<b>25</b>	0	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	---
Magnesium	ppm	ASTM D5185m		<b>151</b>	2	---
Calcium	ppm	ASTM D5185m		<b>325</b>	15	---
Phosphorus	ppm	ASTM D5185m		<b>1035</b>	47	---
Zinc	ppm	ASTM D5185m		<b>1322</b>	4	---
Sulfur	ppm	ASTM D5185m		<b>8893</b>	3842	---
Visc @ 40°C	cSt	ASTM D445		<b>439</b>	278	---

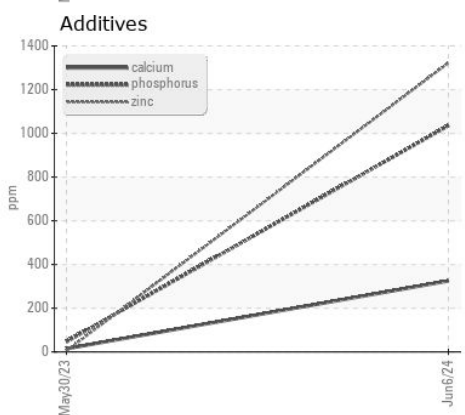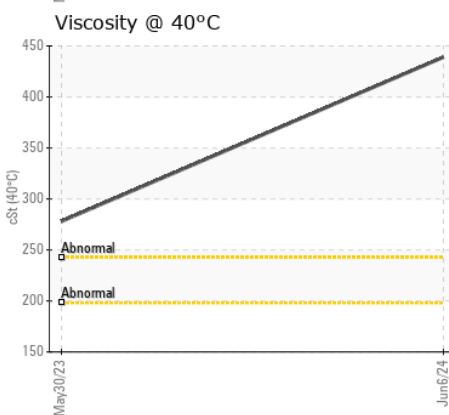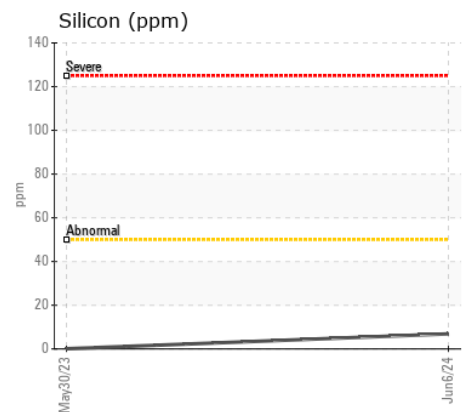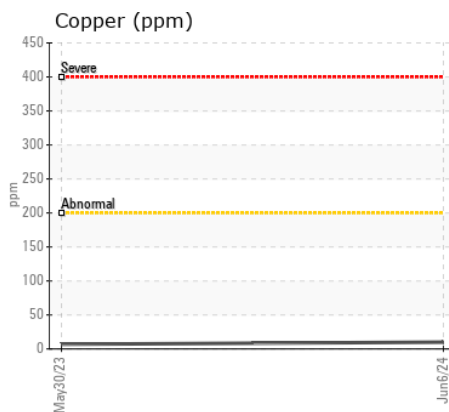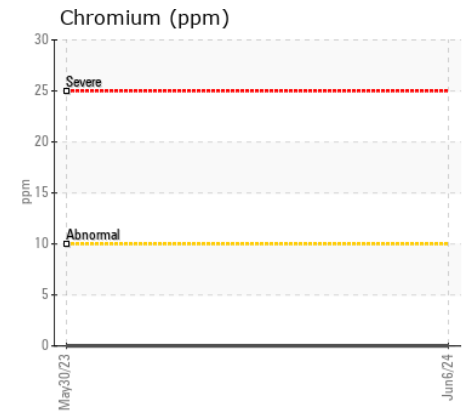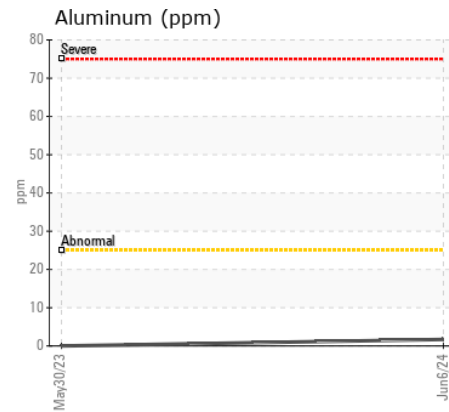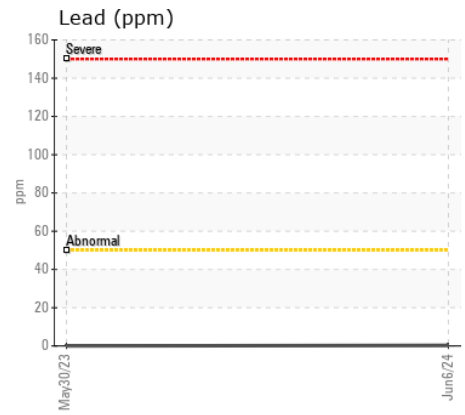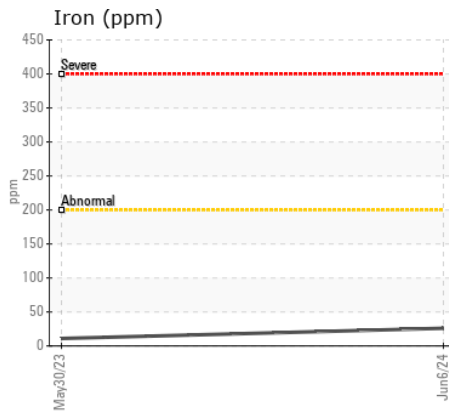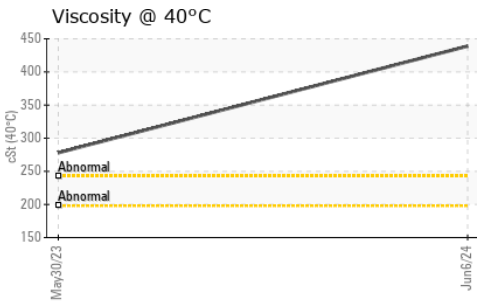

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DC0036839  
**Lab Number** : 06217173  
**Unique Number** : 11090037  
**Test Package** : MOB 1

**Received** : 21 Jun 2024  
**Tested** : 24 Jun 2024  
**Diagnosed** : 24 Jun 2024 - Don Baldrige

**CRANWORKS INC - MID-ATLANTIC**  
 11089 LEADBETTER ROAD  
 ASHLAND, VA  
 US 23005  
 Contact: JASON WILDE  
 jcwilde@vacraneworks.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: