



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**VOLVO EC300E 316349**  
Component  
**Swing Drive**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0946551</b>	---	---
Sample Date		Client Info		<b>18 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>3710</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	<b>446</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>4</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>50	<b>15</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	<b>7</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.25	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.25	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>2</b>	---	---
Boron	ppm	ASTM D5185m	400	<b>86</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>2</b>	---	---
Manganese	ppm	ASTM D5185m		<b>5</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>4</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>18</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>982</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>32</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>21553</b>	---	---
Visc @ 40°C	cSt	ASTM D445	143	<b>134</b>	---	---

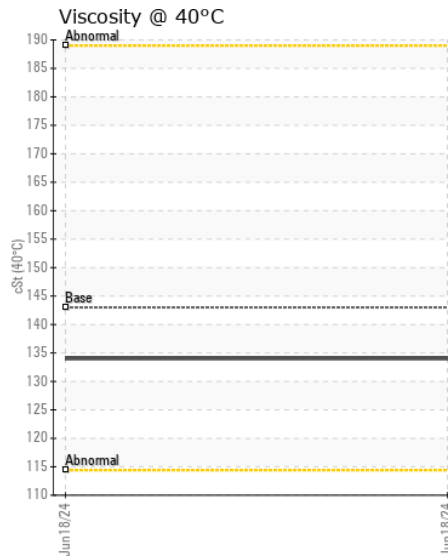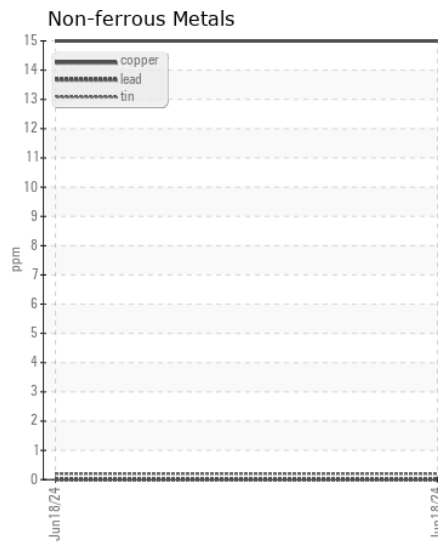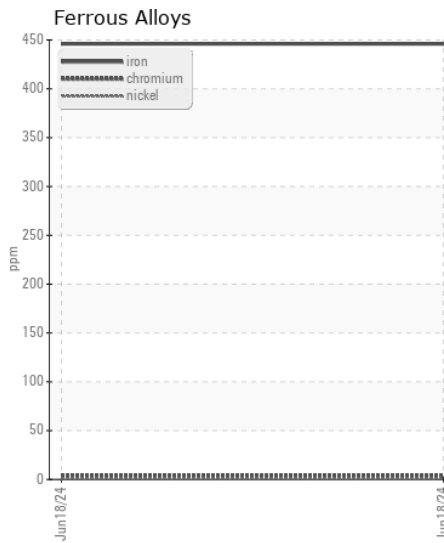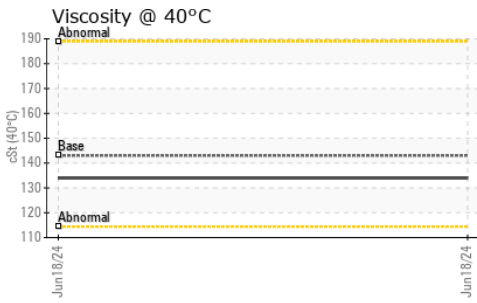

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0946551  
**Lab Number** : 06217197  
**Unique Number** : 11090061  
**Test Package** : CONST

**Received** : 21 Jun 2024  
**Tested** : 24 Jun 2024  
**Diagnosed** : 24 Jun 2024 - Don Baldrige

**MCCLUNG-LOGAN EQUIPMENT CO - FREDERICKSBURG**  
 358 KINGS HWY  
 FREDERICKSBURG, VA  
 US 22405  
 Contact: JW MEADOWS  
 jmeadows@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: