



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
015-R014
 Component
Rear Left Final Drive
 Fluid
SCHAEFFER SCHAEFFER 293 MOLY 75W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample
 Comment: Left rear final sample @ 7393 hours)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868306	WC0698152	WC0548441
Sample Date		Client Info		18 Jun 2024	03 Oct 2022	14 Apr 2022
Machine Age	hrs	Client Info		7393	21160	20124
Oil Age	hrs	Client Info		7393	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	28	137	46
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	<1
Aluminum	ppm	ASTM D5185m	>25	2	1	<1
Lead	ppm	ASTM D5185m	>25	0	0	<1
Copper	ppm	ASTM D5185m	>50	33	3	6
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	5	8
Potassium	ppm	ASTM D5185m	>20	4	5	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		10	0	4
Boron	ppm	ASTM D5185m		249	19	201
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	364	6
Manganese	ppm	ASTM D5185m		4	5	1
Magnesium	ppm	ASTM D5185m		<1	5	8
Calcium	ppm	ASTM D5185m		17	16	103
Phosphorus	ppm	ASTM D5185m		1540	1154	1307
Zinc	ppm	ASTM D5185m		36	34	66
Sulfur	ppm	ASTM D5185m		31650	25235	19791
Visc @ 40°C	cSt	ASTM D445		101	100	102

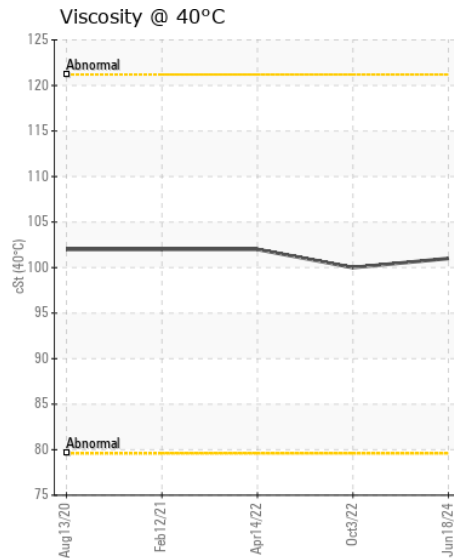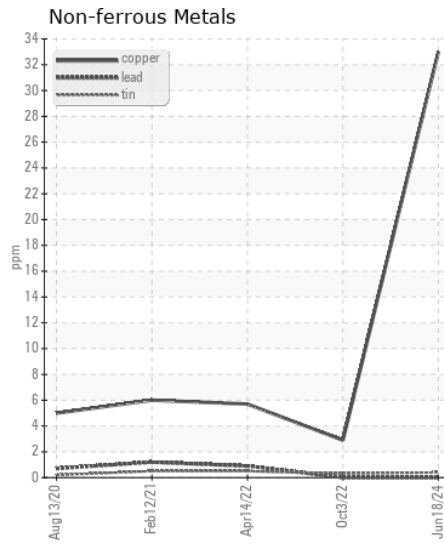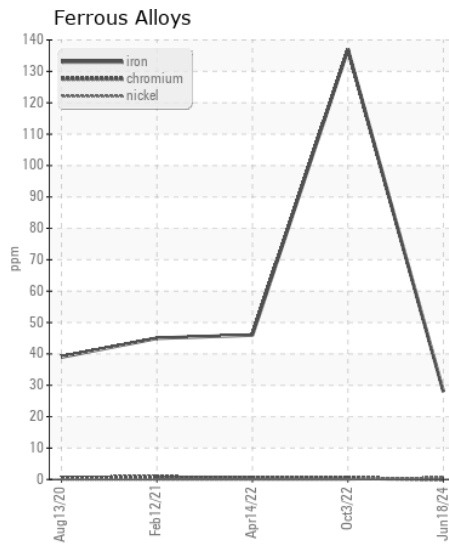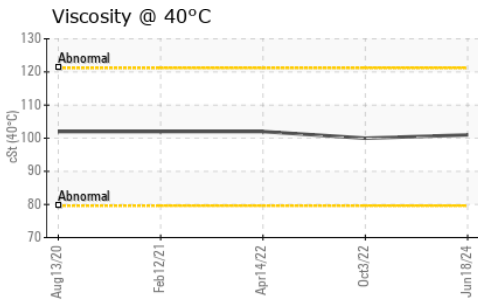

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0868306

Lab Number : 06217201

Unique Number : 11090065

Test Package : CONST

Received : 21 Jun 2024

Tested : 24 Jun 2024

Diagnosed : 24 Jun 2024 - Don Baldrige

SHIMMICK CONSTRUCTION

5535 TRAILHEAD DRIVE

CHATTANOOGA, TN

US 37415

Contact: DANIEL LISELLA

daniel.lisella@shimmick.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)