



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**BEECH 350 111M**  
 Component  
**Left Turbine**  
 Fluid  
**BP TURBO OIL 2380 (12 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GF0001781</b>	GF0001581	GF0001121
Sample Date		Client Info		<b>19 Jun 2024</b>	19 Feb 2024	02 Aug 2023
TSN	hrs	Client Info		<b>1850</b>	1719	1525
TSO	hrs	Client Info		<b>1719</b>	1719	1117
Oil Age	hrs	Client Info		<b>1850</b>	1719	1525
Filter Age	hrs	Client Info		<b>900</b>	795	600
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	2	<1
Lead	ppm	ASTM D5185m		<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>15	<b>1</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Water		WC Method	>0.03	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.03	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	0	0
Boron	ppm	ASTM D5185m	0	<b>2</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Calcium	ppm	ASTM D5185m	0	<b>0</b>	0	1
Phosphorus	ppm	ASTM D5185m	2500	<b>2757</b>	2293	2629
Zinc	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Sulfur	ppm	ASTM D5185m	0	<b>125</b>	0	8
Visc @ 40°C	cSt	ASTM D445	24.2	<b>23.7</b>	24.1	23.8

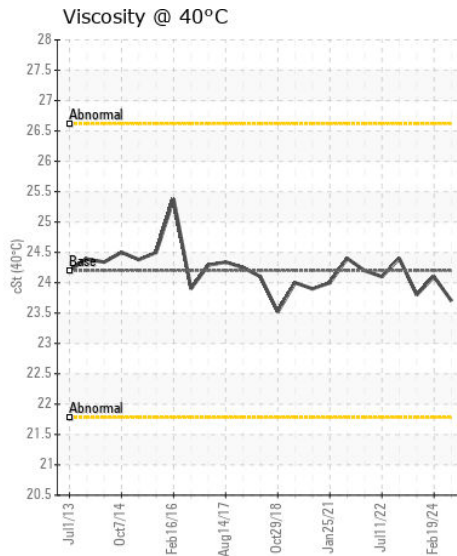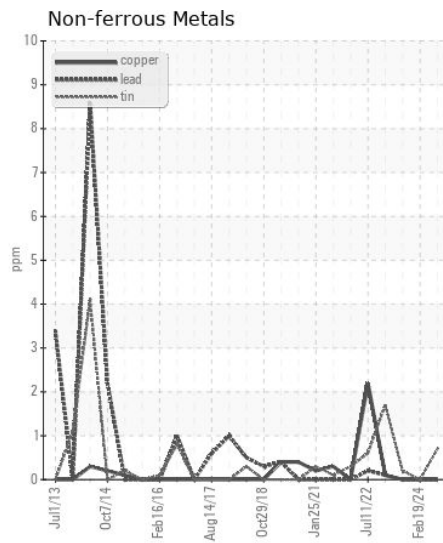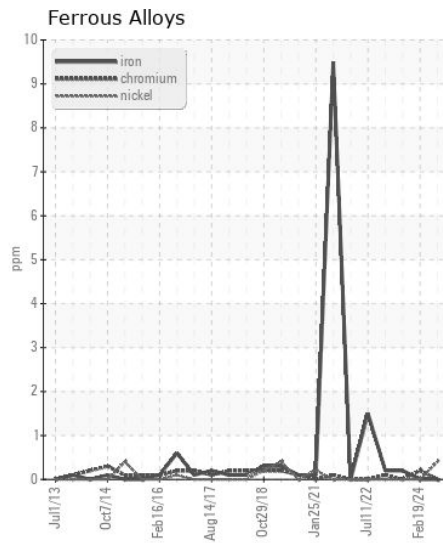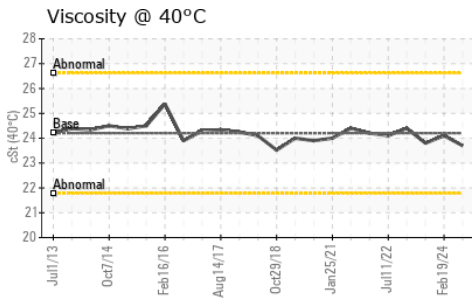

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GF0001781  
**Lab Number** : 06217234  
**Unique Number** : 11090098  
**Test Package** : AVI 1

**STEVENS AEROSPACE AND DEFENSE SYSTEMS, LLC**  
 1280 THUNDERBIRD DR  
 SMYRNA, TN  
 US 37167  
 Contact: PATRICK ISRAEL  
 pisrael@stevensaerospace.com  
 T: (615)365-2132  
 F: (615)365-0966

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)