



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 990K 6088 (S/N A9P00362)
 Component
Rear Differential
 Fluid
TULCO LUBSOIL TO-4 50 (49 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003619	TO10003012	TO10002880
Sample Date		Client Info		13 Jun 2024	22 Mar 2024	06 Nov 2023
Machine Age	hrs	Client Info		15988	15413	14829
Oil Age	hrs	Client Info		4500	3925	3341
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
		ASTM D8184		25	18	16
Iron	ppm	ASTM D5185m	>500	14	22	9
Chromium	ppm	ASTM D5185m	>3	<1	<1	0
Nickel	ppm	ASTM D5185m	>3	1	2	<1
Titanium	ppm	ASTM D5185m	>2	<1	<1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>30	3	3	<1
Lead	ppm	ASTM D5185m	>13	4	5	2
Copper	ppm	ASTM D5185m	>103	50	62	34
Tin	ppm	ASTM D5185m	>5	4	6	2
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	19	27	13
Potassium	ppm	ASTM D5185m	>20	3	2	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	5	4
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		<1	<1	0
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m		11	17	11
Calcium	ppm	ASTM D5185m		3423	4699	3018
Phosphorus	ppm	ASTM D5185m		1028	1361	915
Zinc	ppm	ASTM D5185m		1196	1655	1127
Sulfur	ppm	ASTM D5185m		5165	7896	4687
Acid Number (AN)	mg KOH/g	ASTM D8045		1.11	1.61	1.10
Visc @ 40°C	cSt	ASTM D445		213	213	213
Visc @ 100°C	cSt	ASTM D445		18.0	18.2	18.4
Viscosity Index (VI)	Scale	ASTM D2270		92	93	95

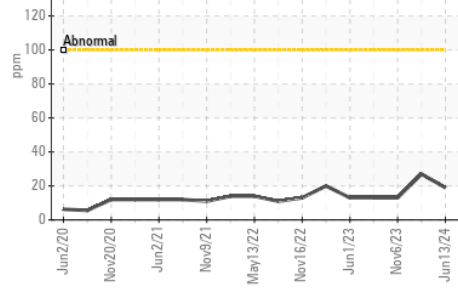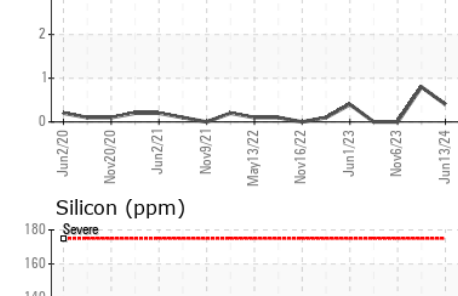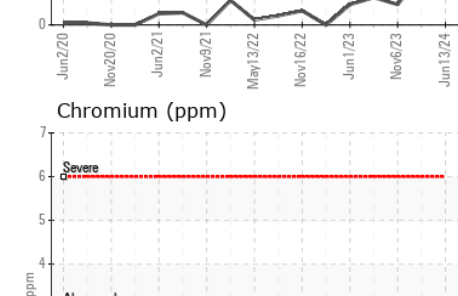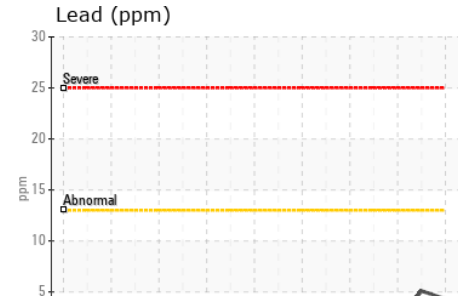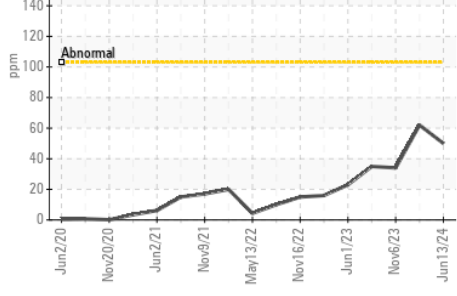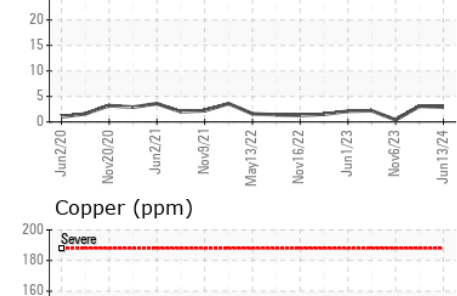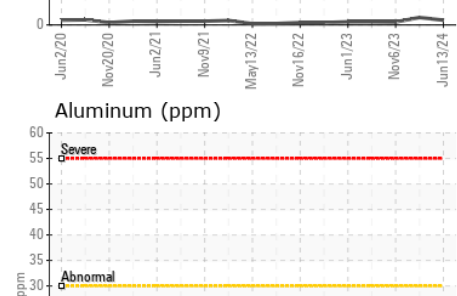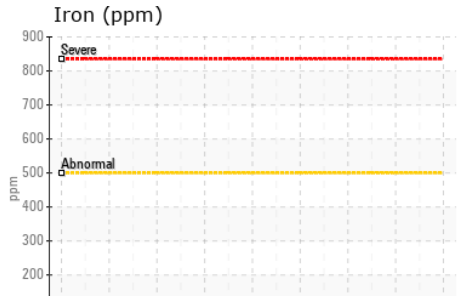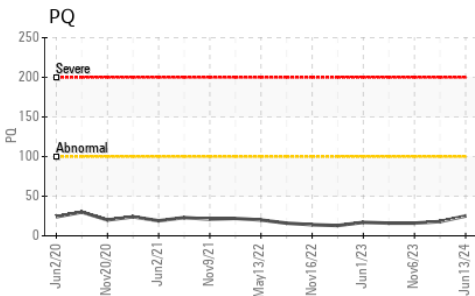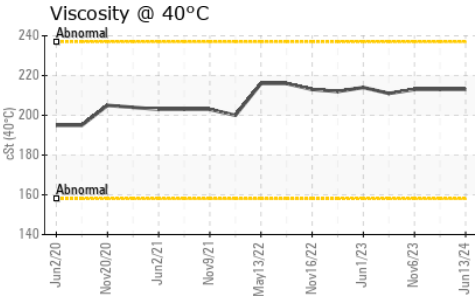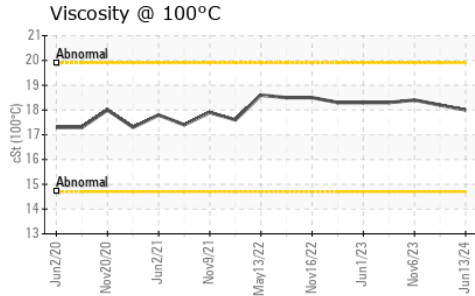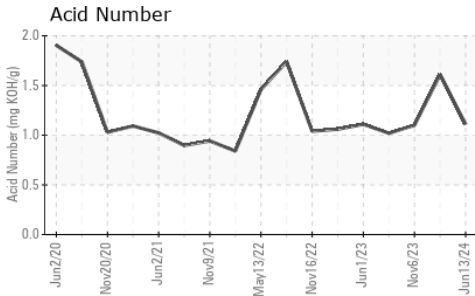

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003619
Lab Number : 06217390
Unique Number : 11090254
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F: