



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 980 H LOADER 6737 (S/N JMS01810)
 Component
Rear Right Final Drive
 Fluid
TULCO LUBSOIL TO-4 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003626	TO10003009	TO10002454
Sample Date		Client Info		13 Jun 2024	15 Dec 2023	31 Jul 2023
Machine Age	hrs	Client Info		31038	30731	30299
Oil Age	hrs	Client Info		2421	2114	1612
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	None	None
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>500	23	22	21
Iron	ppm	ASTM D5185m	>800	21	14	14
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m	>15	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>75	3	<1	2
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>75	2	1	<1
Tin	ppm	ASTM D5185m	>8	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	22	15	16
Potassium	ppm	ASTM D5185m	>20	3	0	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	3	0
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		1	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		14	11	11
Calcium	ppm	ASTM D5185m		4080	2952	3411
Phosphorus	ppm	ASTM D5185m		1310	923	998
Zinc	ppm	ASTM D5185m		1515	1091	1230
Sulfur	ppm	ASTM D5185m		6589	4544	5526
Acid Number (AN)	mg KOH/g	ASTM D8045		1.09	1.01	1.12
Visc @ 40°C	cSt	ASTM D445		211	217	213
Visc @ 100°C	cSt	ASTM D445		18.2	18.3	18.3
Viscosity Index (VI)	Scale	ASTM D2270		94	92	94

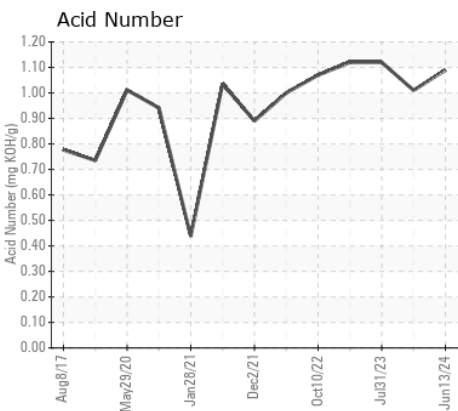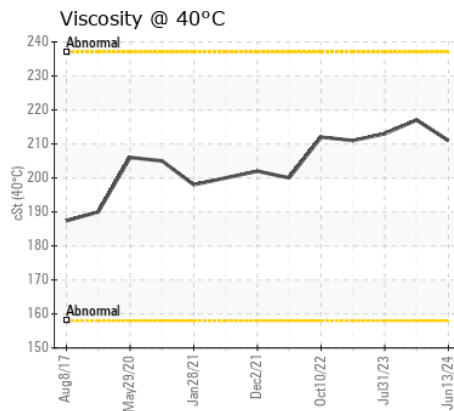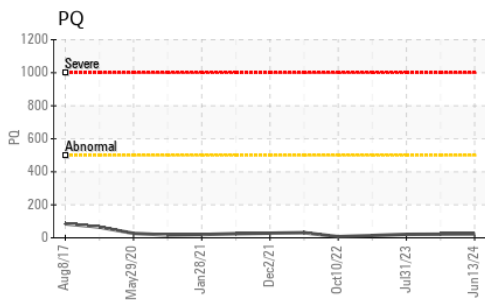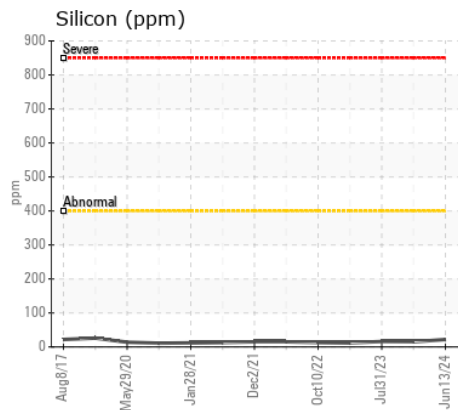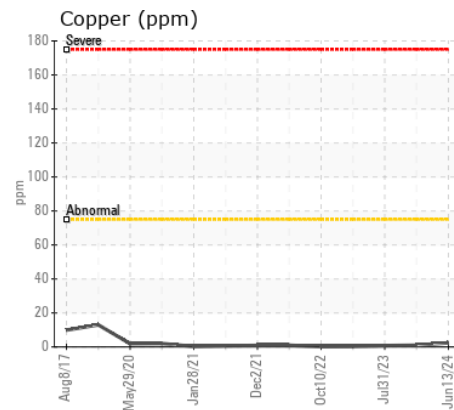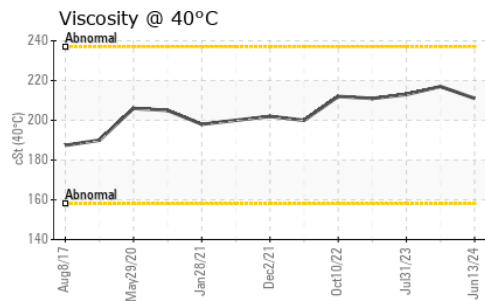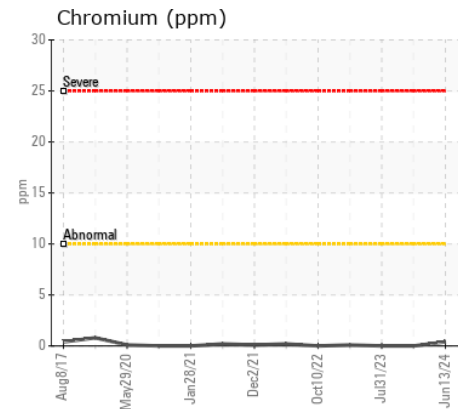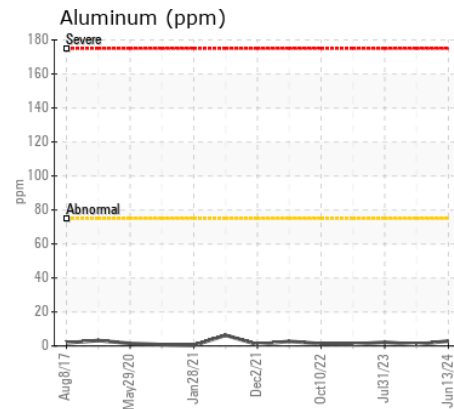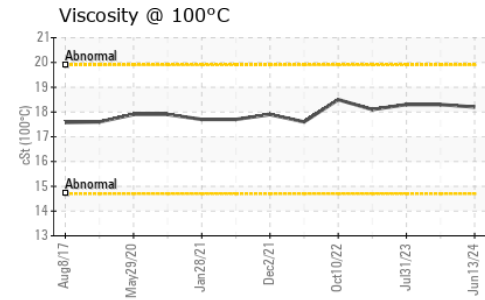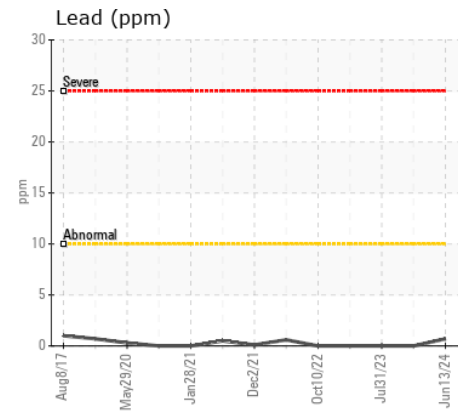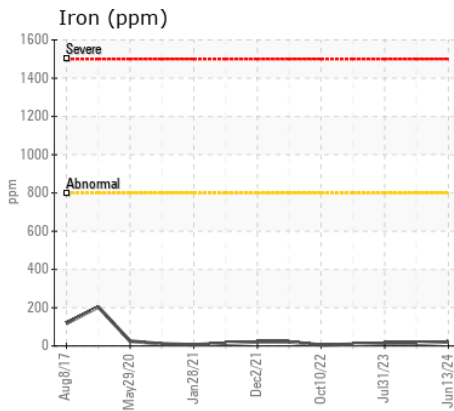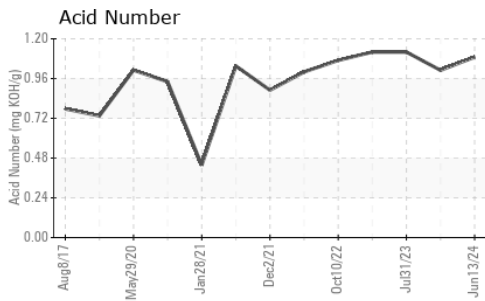

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : TO10003626

Lab Number : 06217391

Unique Number : 11090255

Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

Received : 21 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ANCHOR STONE TULSA ROCK

TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE

TULSA, OK

US 74137

Contact: MIKE SNYDER

msnyder@anchorstoneco.com

T: (417)850-9635

F: