



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PAUL F BROTZGE**  
Component  
**Starboard Reduction Gear**  
Fluid  
**CHEVRON MEROPA 220 (220 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0053161</b>	MW0069289	MW0053167
Sample Date		Client Info		<b>01 Jun 2024</b>	01 May 2024	01 Apr 2024
Machine Age	hrs	Client Info		<b>64260</b>	63561	62865
Oil Age	hrs	Client Info		<b>64260</b>	63561	62865
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>None</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>38</b>	31	34
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	2
Lead	ppm	ASTM D5185m	>100	<b>2</b>	2	0
Copper	ppm	ASTM D5185m	>50	<b>6</b>	7	4
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>10</b>	4	4
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	4	2
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	5	6
Boron	ppm	ASTM D5185m	40	<b>4</b>	3	4
Barium	ppm	ASTM D5185m		<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>2</b>	1	0
Calcium	ppm	ASTM D5185m		<b>18</b>	17	15
Phosphorus	ppm	ASTM D5185m	270	<b>258</b>	131	228
Zinc	ppm	ASTM D5185m		<b>12</b>	3	0
Sulfur	ppm	ASTM D5185m	8600	<b>5461</b>	3813	5574
Acid Number (AN)	mg KOH/g	ASTM D8045	0.64	<b>0.63</b>	0.67	0.66
Visc @ 40°C	cSt	ASTM D445	209	<b>224</b>	225	227

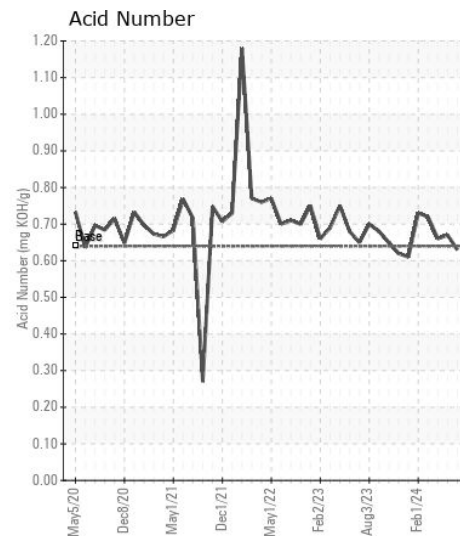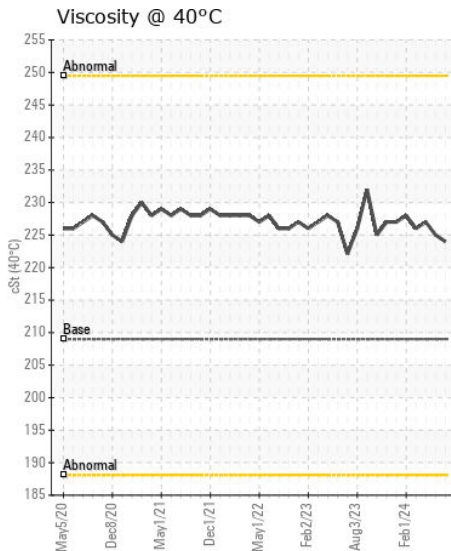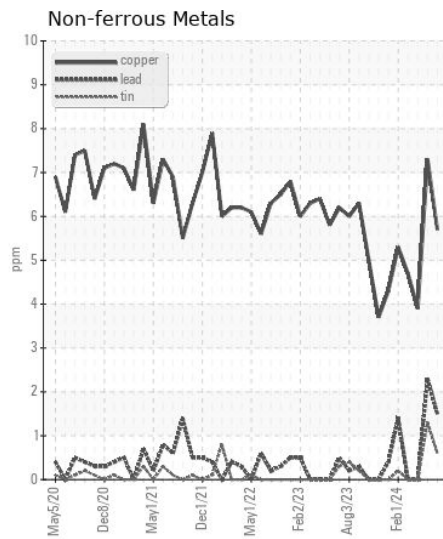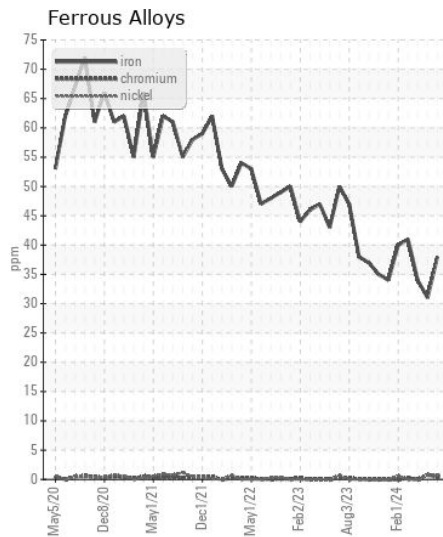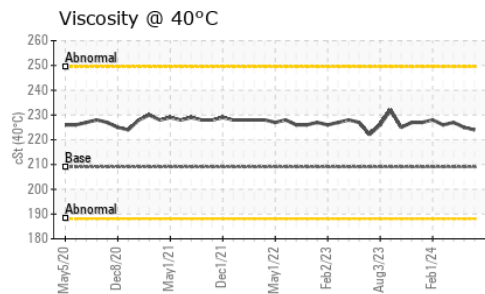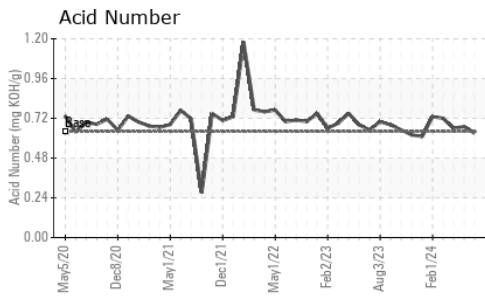

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0053161

**Lab Number** : 06217399

**Unique Number** : 11090263

**Test Package** : MAR 2

**Received** : 21 Jun 2024

**Tested** : 24 Jun 2024

**Diagnosed** : 24 Jun 2024 - Wes Davis

**AMERICAN COMMERCIAL LINES**

PO BOX 610, 1701 E. MARKET STREET

JEFFERSONVILLE, IN

US 47130

Contact: RONALD SCHNEIDER

ronald.schneider@bargeacbl.com

T:

F: (812)288-1644

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)