



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO EC380E 315500
Component
Swing Drive
Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VKC0001259	---	---
Sample Date		Client Info		13 Jun 2024	---	---
Machine Age	hrs	Client Info		908	---	---
Oil Age	hrs	Client Info		908	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	217	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>25	3	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>50	14	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	16	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.25	NEG	---	---
Silt	scalar	*Visual	NONE	LIGHT	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.25	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	379	<1	---	---
Barium	ppm	ASTM D5185m	0.0	6	---	---
Molybdenum	ppm	ASTM D5185m	0.8	<1	---	---
Manganese	ppm	ASTM D5185m	0.0	4	---	---
Magnesium	ppm	ASTM D5185m	31	1	---	---
Calcium	ppm	ASTM D5185m	38	3	---	---
Phosphorus	ppm	ASTM D5185m	1077	340	---	---
Zinc	ppm	ASTM D5185m	46	17	---	---
Sulfur	ppm	ASTM D5185m	23526	15831	---	---

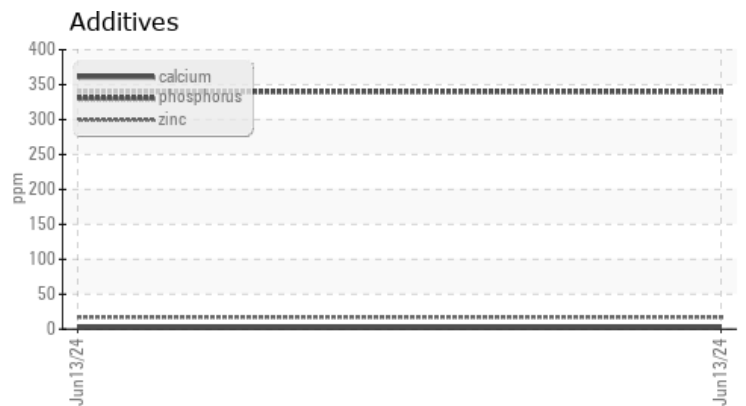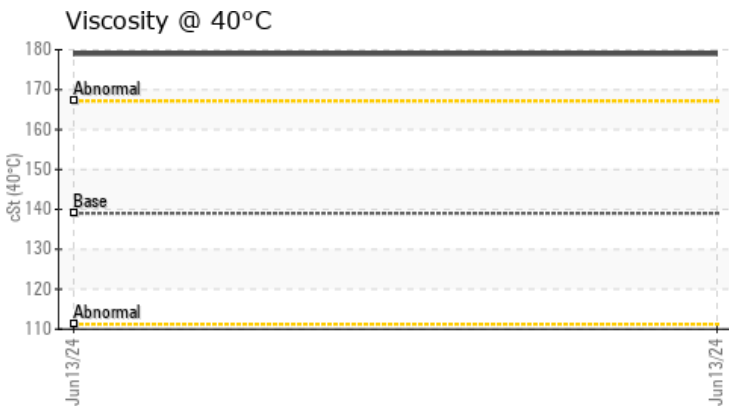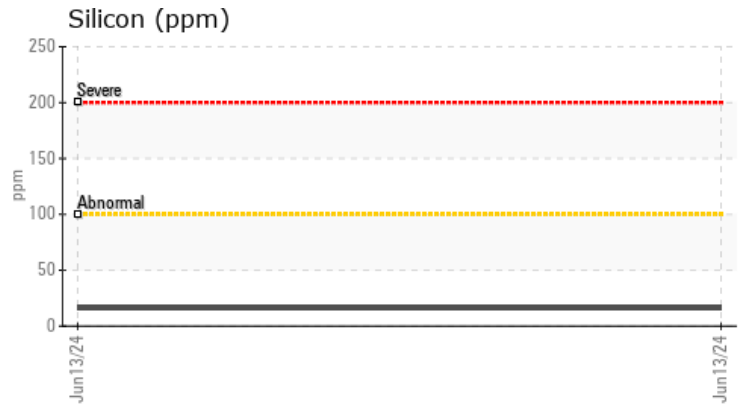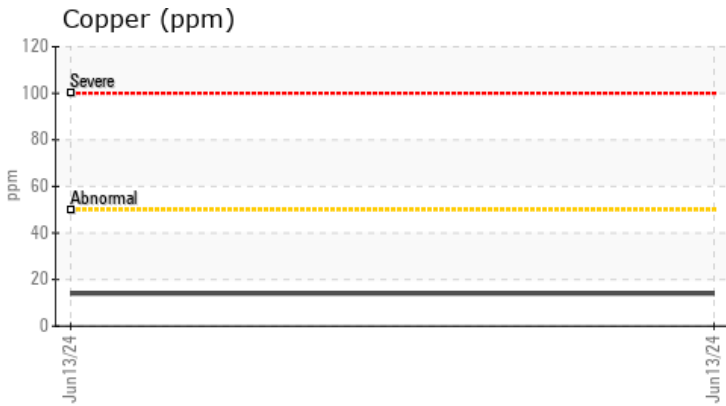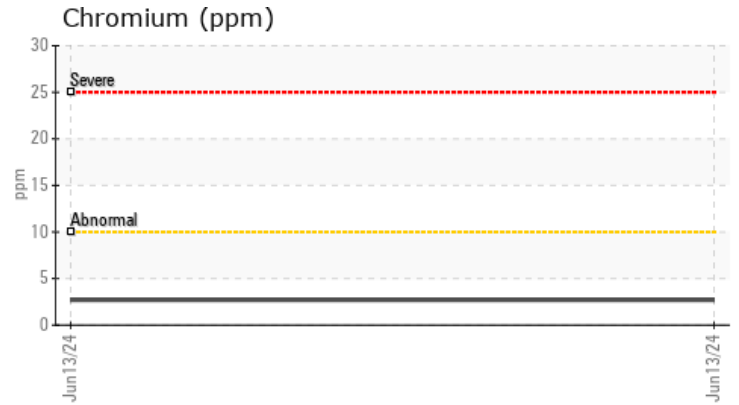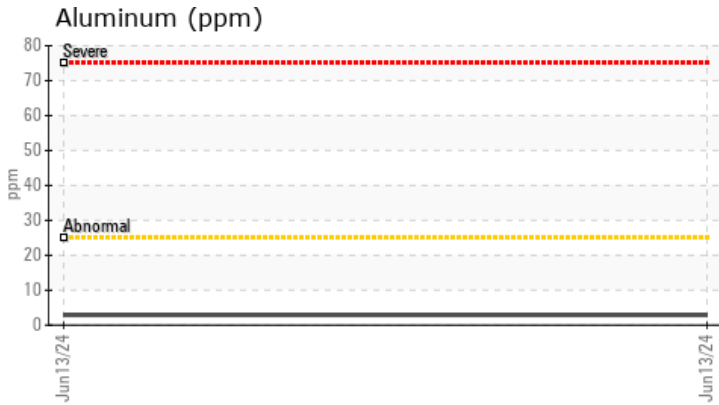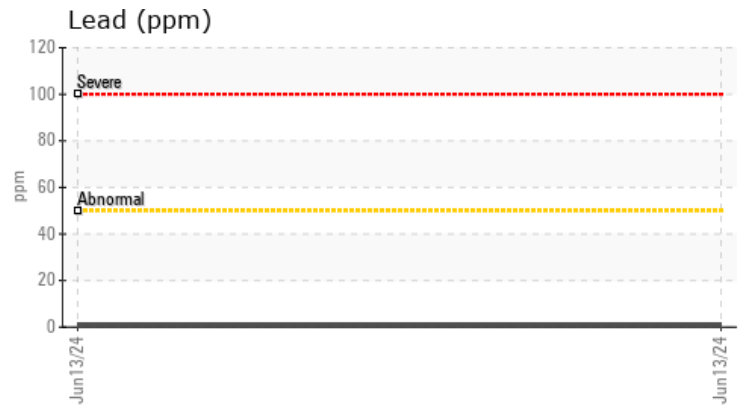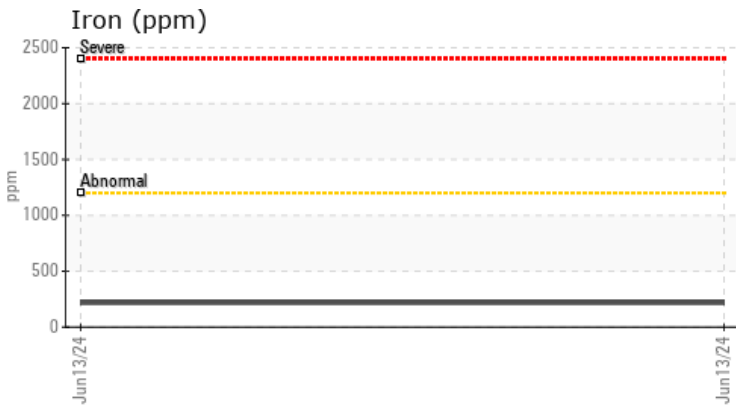

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VKC0001259

Lab Number : 06217446

Unique Number : 11090310

Test Package : MOBCE

Received : 21 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Sean Felton

GW VAN KEPPEL CO

1801 NORTH 9TH ST

KANSAS CITY, KS

US 66110

Contact: PAT SAUSE

psause@vankeppel.com

T:

F: (913)281-4815

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)