



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[HOLIDAY SAND]
Machine Id
VOLVO L180H 005445
Component
Front Axle
Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VKC0001243	VKC0000712	---
Sample Date		Client Info		10 Jun 2024	07 Mar 2023	---
Machine Age	hrs	Client Info		7919	4968	---
Oil Age	hrs	Client Info		0	1000	---
Filter Age	hrs	Client Info		0	1000	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	17	29	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>30	3	2	---
Lead	ppm	ASTM D5185m	>50	<1	<1	---
Copper	ppm	ASTM D5185m	>120	1	<1	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	10	16	---
Potassium	ppm	ASTM D5185m	>20	3	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	2	---
Boron	ppm	ASTM D5185m		74	111	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		11	15	---
Calcium	ppm	ASTM D5185m		2281	3414	---
Phosphorus	ppm	ASTM D5185m		1013	1057	---
Zinc	ppm	ASTM D5185m		1176	1351	---
Sulfur	ppm	ASTM D5185m		3831	4204	---

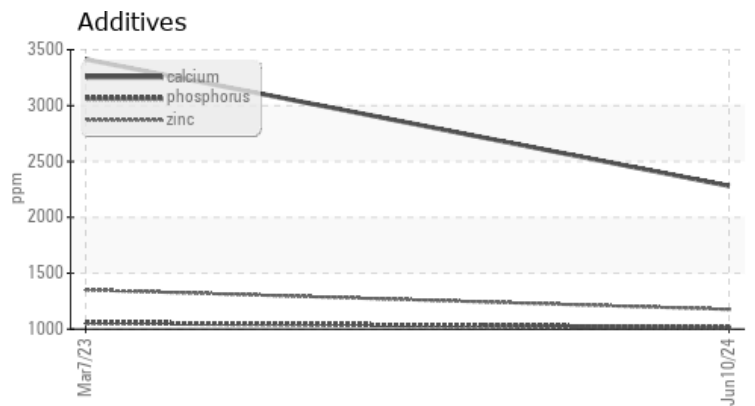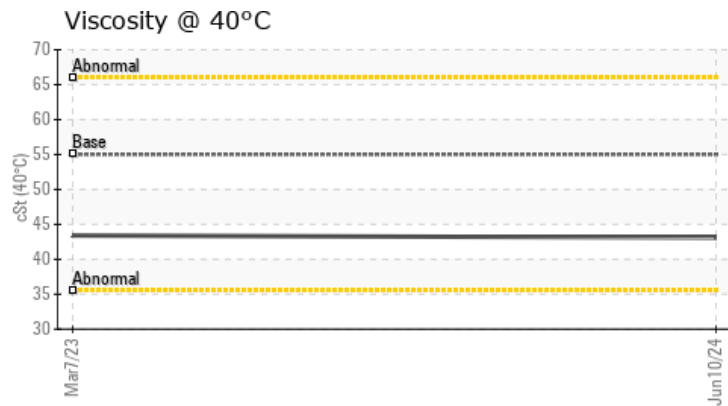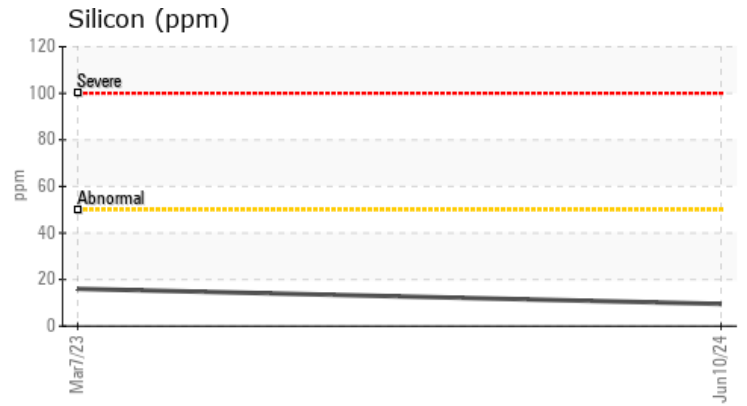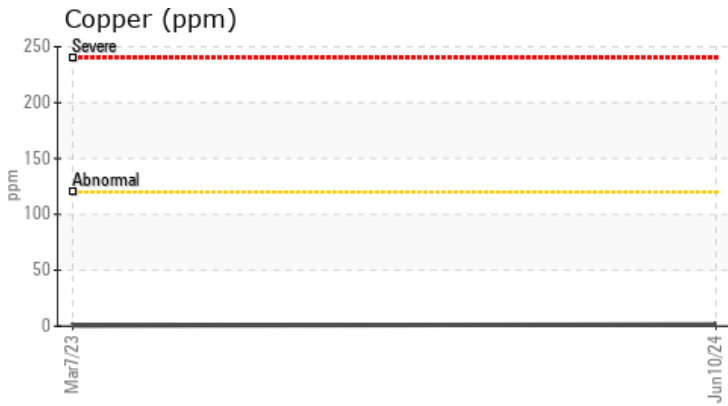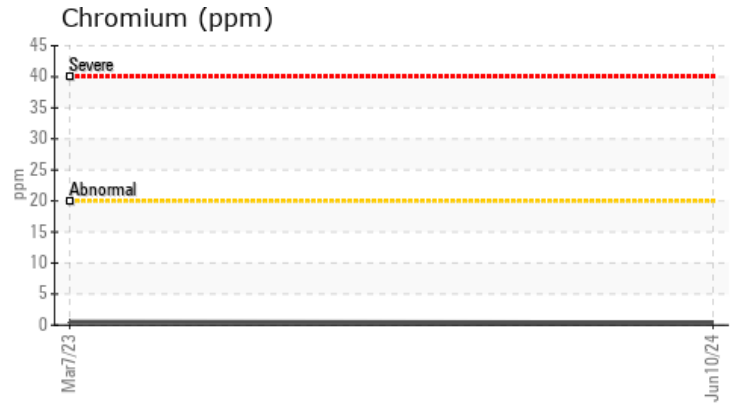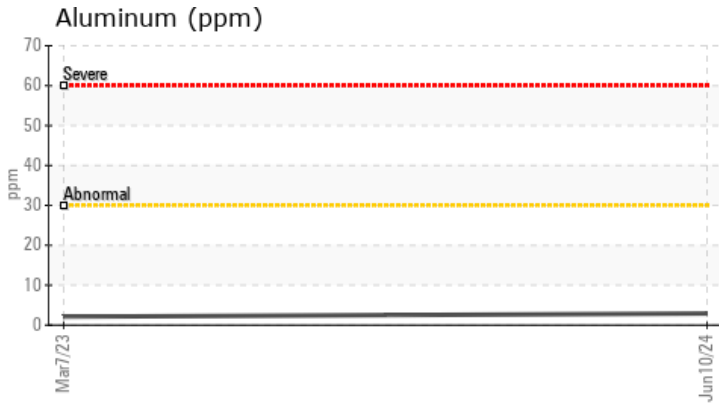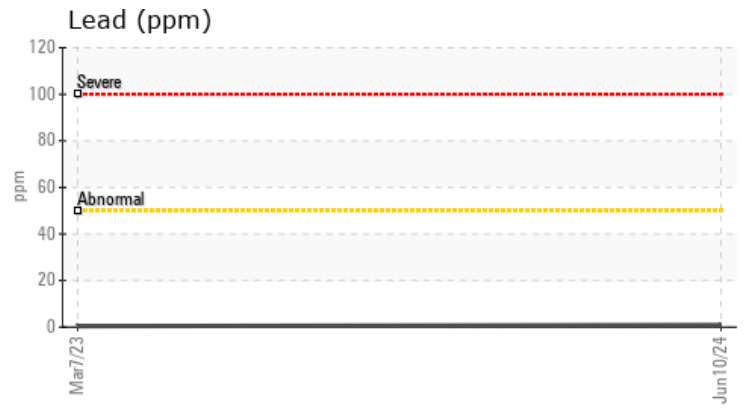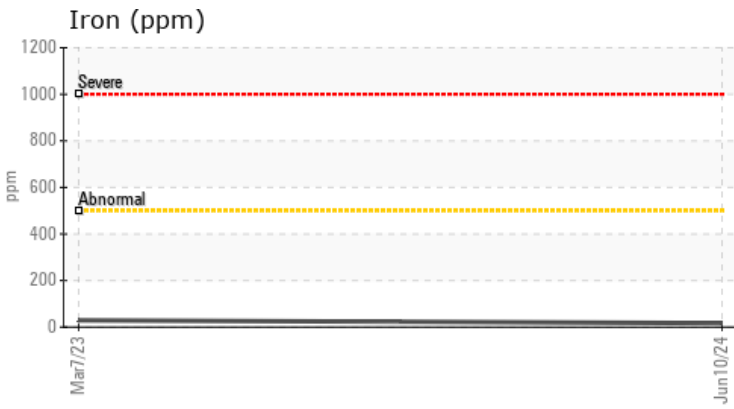

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VKC0001243
Lab Number : 06217451
Unique Number : 11090315
Test Package : MOBCE

Received : 21 Jun 2024
Tested : 24 Jun 2024
Diagnosed : 24 Jun 2024 - Wes Davis

GW VAN KEPPEL CO
 1801 NORTH 9TH ST
 KANSAS CITY, KS
 US 66110
 Contact: PAT SAUSE
 psause@vankeppel.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (913)281-4815