



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 2001
Component
Diesel Engine
Fluid
BAY OIL 15W40 (11 GAL)

RECOMMENDATION

Check for low coolant level. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WCM1396345	---	---
Sample Date		Client Info		30 Apr 2024	---	---
Machine Age	mls	Client Info		329000	---	---
Oil Age	mls	Client Info		10000	---	---
Filter Age	mls	Client Info		10000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	---	---
Chromium	ppm	ASTM D5185m	>6	0	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>30	3	---	---
Lead	ppm	ASTM D5185m	>10	3	---	---
Copper	ppm	ASTM D5185m	>150	3	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION













Sodium and/or potassium levels are high.

Silicon	ppm	ASTM D5185m	>20	13	---	---
Potassium	ppm	ASTM D5185m	>20	51	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		8	---	---
Boron	ppm	ASTM D5185m		33	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		96	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		224	---	---
Calcium	ppm	ASTM D5185m		3405	---	---
Phosphorus	ppm	ASTM D5185m		1064	---	---
Zinc	ppm	ASTM D5185m		1184	---	---
Sulfur	ppm	ASTM D5185m		8979	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	12.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.6	---	---
Visc @ 100°C	cSt	ASTM D445		14.3	---	---

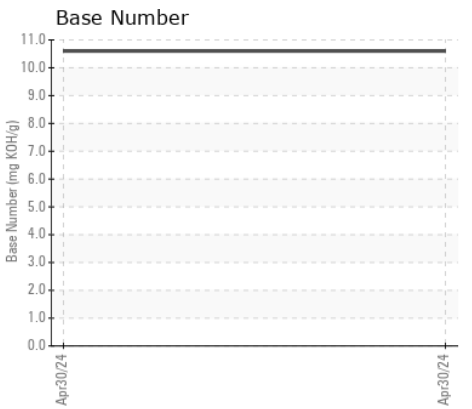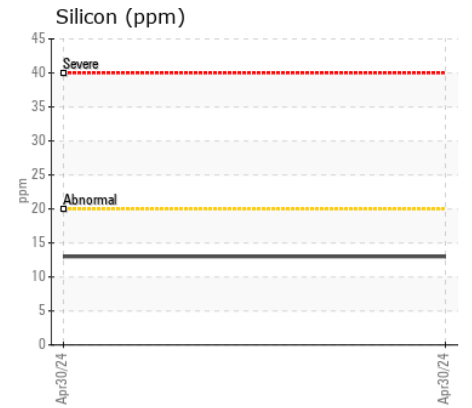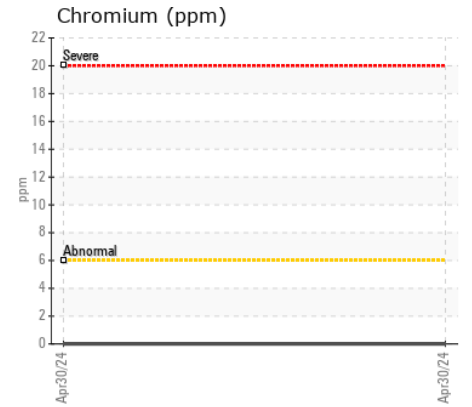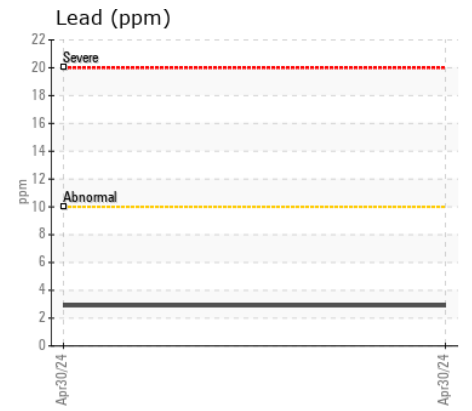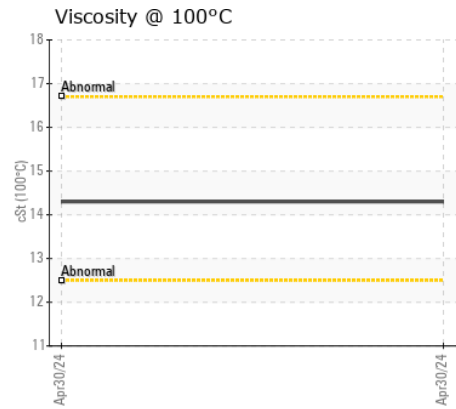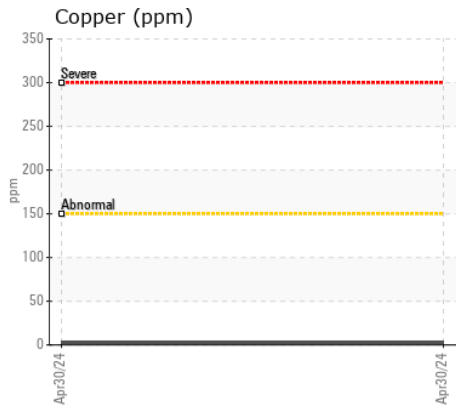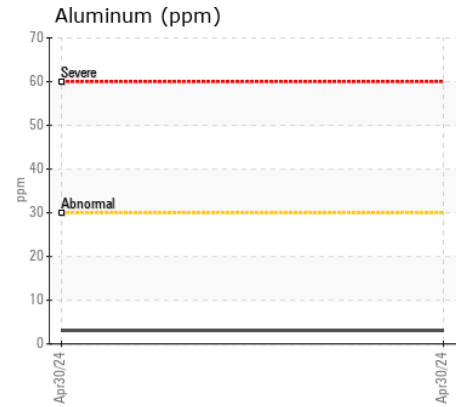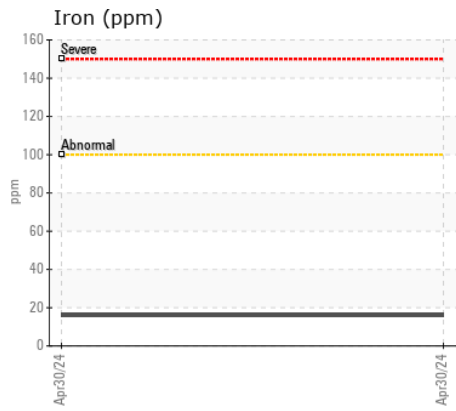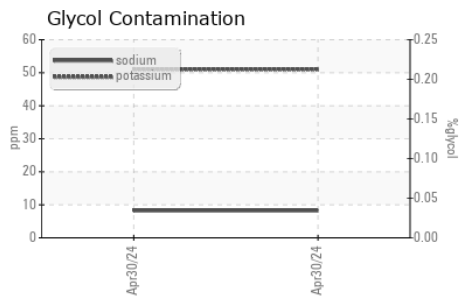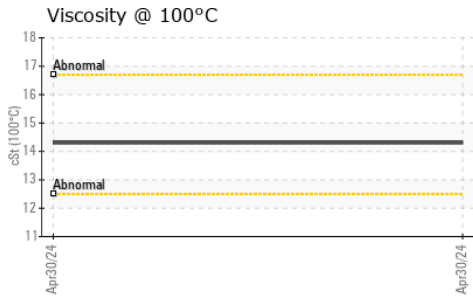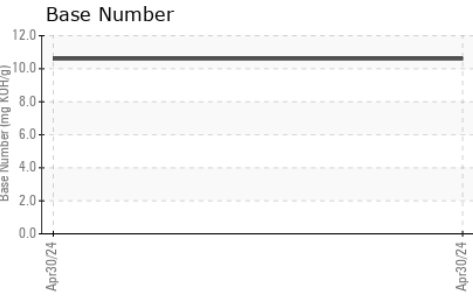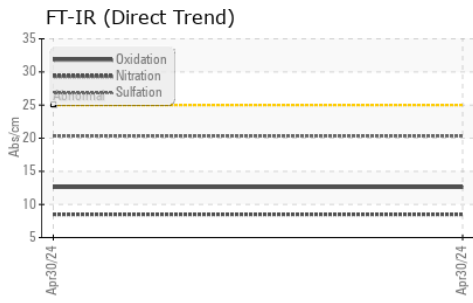

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WCM1396345 **Received** : 21 Jun 2024
Lab Number : 06217463 **Tested** : 25 Jun 2024
Unique Number : 11090327 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

PANTERMEHL LAND CLEARING
 1427 BUG HILL RD.
 ASHFIELD, MA
 US 01330
 Contact: RICHARD
 plc1427@yahoo.com
 T: (413)628-0058
 F: (413)628-4660