



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**KENWORTH T-880 T-796 (S/N 1NKZXPEX9HJ176566)**  
 Component  
**Diesel Engine**  
 Fluid  
**CASTROL VECTON 15W40 CK4 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0934757</b>	WC0865161	WC0693475
Sample Date		Client Info		<b>20 May 2024</b>	16 Oct 2023	06 Apr 2023
Machine Age	mls	Client Info		<b>328612</b>	303398	280008
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>13</b>	9	10
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>8</b>	<1	<1
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>7</b>	5	4
Potassium	ppm	ASTM D5185m	>20	<b>20</b>	2	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.4</b>	8.4	8.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.1</b>	22.0	22.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	3	0
Boron	ppm	ASTM D5185m		<b>2</b>	<1	0
Barium	ppm	ASTM D5185m		<b>0</b>	19	0
Molybdenum	ppm	ASTM D5185m		<b>3</b>	3	3
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>73</b>	41	41
Calcium	ppm	ASTM D5185m		<b>2386</b>	2123	2349
Phosphorus	ppm	ASTM D5185m		<b>946</b>	840	866
Zinc	ppm	ASTM D5185m		<b>1123</b>	977	1044
Sulfur	ppm	ASTM D5185m		<b>4445</b>	4500	3517
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.6</b>	13.1	13.7
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>5.5</b>	4.9	5.4
Visc @ 100°C	cSt	ASTM D445	15.5	<b>13.3</b>	13.7	12.9


**FT-IR (Direct Trend)**

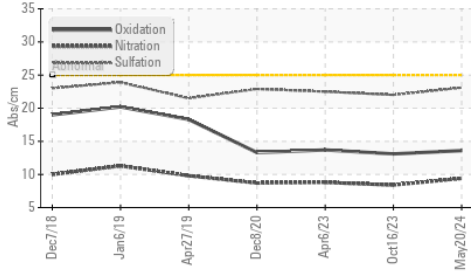


**Ferrous Alloys**

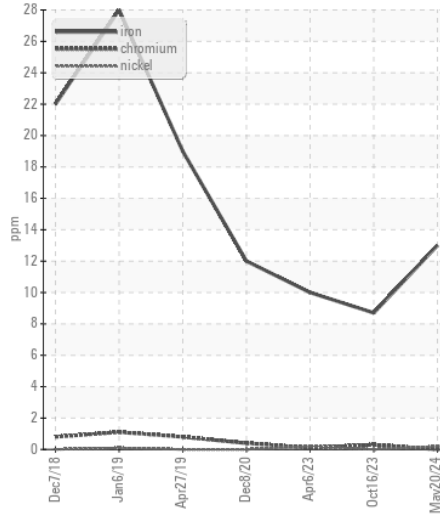


**Base Number**

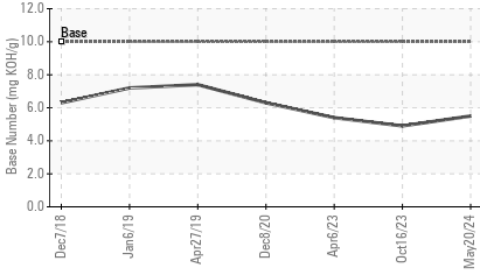


**Non-ferrous Metals**

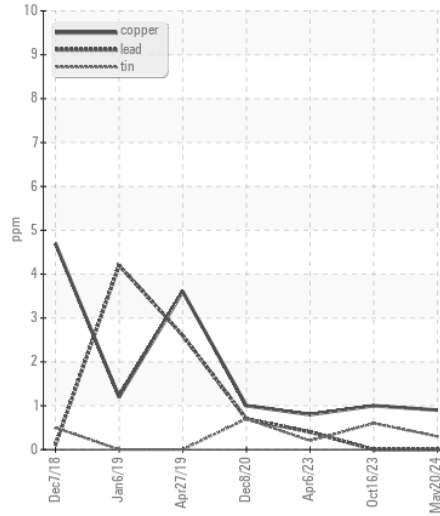


**Viscosity @ 100°C**

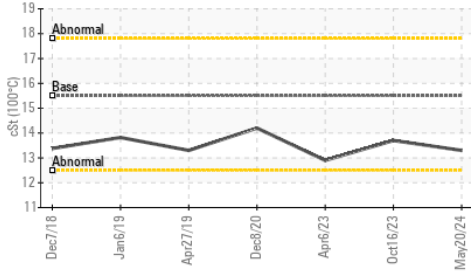

**Viscosity @ 100°C**

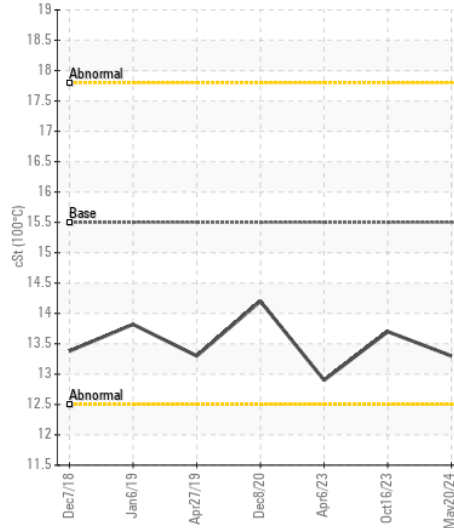

**Base Number**

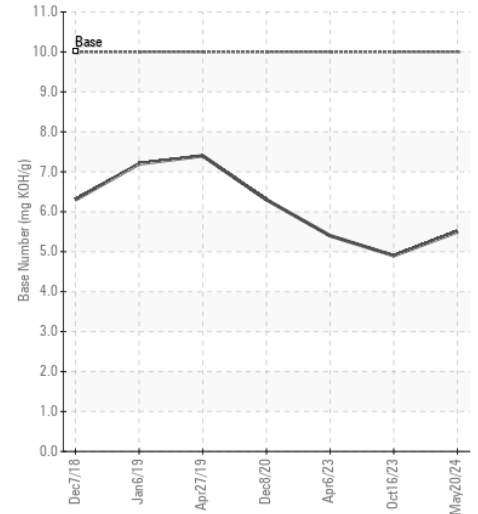

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0934757 **Received** : 21 Jun 2024  
**Lab Number** : 06217485 **Tested** : 25 Jun 2024  
**Unique Number** : 11090349 **Diagnosed** : 25 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: TBN )

**EAI EQUIPMENT A DIV OF PLEASANT CONSTRUCTION INC**  
 24024 FREDERICK ROAD  
 CLARKSBURG, MD  
 US 20871  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: