



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
713075
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0103575	GFL0103550	GFL0085346
Sample Date		Client Info		12 Jun 2024	06 Mar 2024	02 Jan 2024
Machine Age	hrs	Client Info		2645	1972	1411
Oil Age	hrs	Client Info		2645	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	20	17	25
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	<1	2
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>20	2	<1	2
Lead	ppm	ASTM D5185m	>40	0	<1	1
Copper	ppm	ASTM D5185m	>330	14	34	138
Tin	ppm	ASTM D5185m	>15	2	<1	3
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	5	4	9
Potassium	ppm	ASTM D5185m	>20	3	<1	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.6	0.5	0.5
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.2	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	20.6	23.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	3	4
Boron	ppm	ASTM D5185m	0	3	6	9
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	63	63	68
Manganese	ppm	ASTM D5185m	0	1	<1	1
Magnesium	ppm	ASTM D5185m	1010	1044	1064	1021
Calcium	ppm	ASTM D5185m	1070	1142	1174	1148
Phosphorus	ppm	ASTM D5185m	1150	1117	1046	1066
Zinc	ppm	ASTM D5185m	1270	1372	1329	1359
Sulfur	ppm	ASTM D5185m	2060	3305	3299	2598
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.2	17.4	21.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	6.7	6.4	7.0
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.7	13.5


FT-IR (Direct Trend)

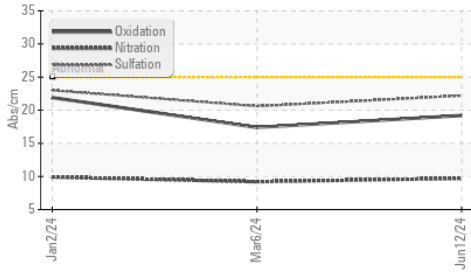


Ferrous Alloys

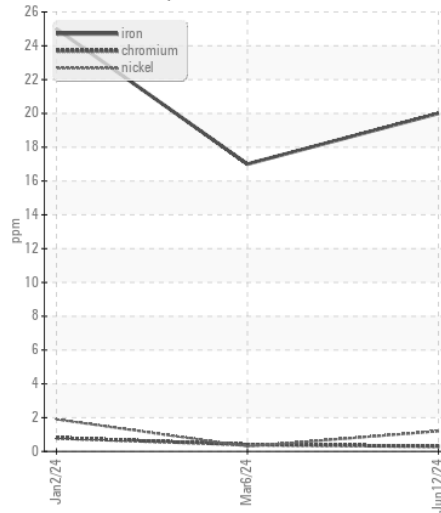


Base Number

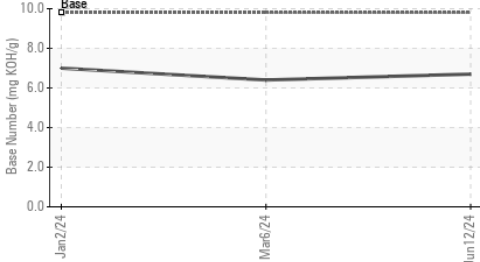


Viscosity @ 100°C

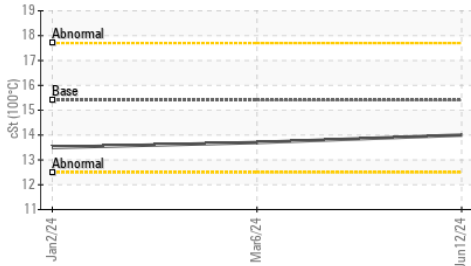


Non-ferrous Metals

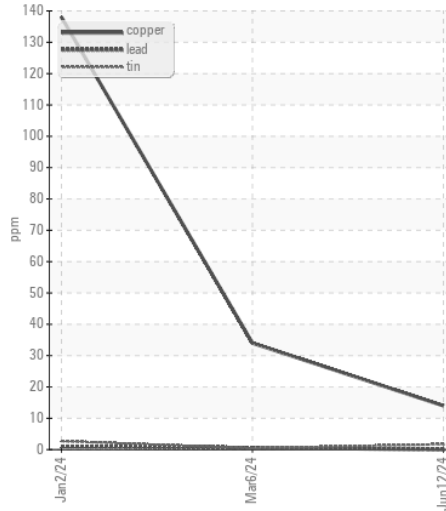

Viscosity @ 100°C

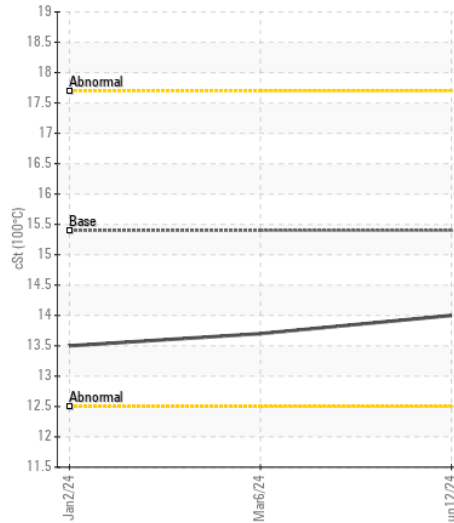

Base Number

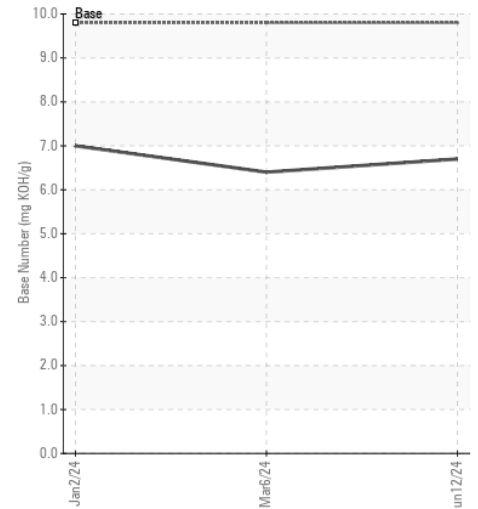

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0103575
 Lab Number : 06217577
 Unique Number : 11090441
 Test Package : FLEET

Received : 21 Jun 2024
 Tested : 24 Jun 2024
 Diagnosed : 24 Jun 2024 - Wes Davis

GFL Environmental - 958A - Chillicothe Wigan
 19908 N. State Rd 29
 Chillicothe, IL
 US 61523
 Contact: Bryan Link
 blink@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: