



# OIL ANALYSIS REPORT

|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**69801**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>WC0938999</b>   | WC0829625   | WC0725277   |
| Sample Date    |     | Client Info |           | <b>06 Jun 2024</b> | 18 Oct 2023 | 17 Feb 2023 |
| Machine Age    | mls | Client Info |           | <b>253503</b>      | 206995      | 196144      |
| Oil Age        | mls | Client Info |           | <b>253503</b>      | 206995      | 0           |
| Filter Age     | mls | Client Info |           | <b>253503</b>      | 206995      | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | N/A         | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | N/A         | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## WEAR

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >100 | <b>15</b>    | 21   | 13   |
| Chromium     | ppm    | ASTM D5185m | >20  | <b>&lt;1</b> | <1   | 1    |
| Nickel       | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | 0    | 0    |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | 0    |
| Silver       | ppm    | ASTM D5185m | >3   | <b>&lt;1</b> | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >20  | <b>4</b>     | 2    | 0    |
| Lead         | ppm    | ASTM D5185m | >40  | <b>0</b>     | <1   | <1   |
| Copper       | ppm    | ASTM D5185m | >330 | <b>&lt;1</b> | 1    | <1   |
| Tin          | ppm    | ASTM D5185m | >15  | <b>&lt;1</b> | 0    | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>0</b>     | 0    | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

## CONTAMINATION

There is no indication of any contamination in the oil.


|                  |          |             |       |                |       |       |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >25   | <b>5</b>       | 4     | 4     |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>5</b>       | 2     | 2     |
| Fuel             |          | WC Method   | >5    | <b>&lt;1.0</b> | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>     | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>     | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.2</b>     | 0.1   | 0.1   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>7.2</b>     | 6.4   | 7.4   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>21.8</b>    | 19.0  | 20.3  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>    | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b>   | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>     | NEG   | NEG   |

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m | >158 | <b>2</b>     | <1   | 2    |
| Boron            | ppm      | ASTM D5185m | 250  | <b>270</b>   | 5    | 2    |
| Barium           | ppm      | ASTM D5185m | 10   | <b>0</b>     | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 100  | <b>88</b>    | 60   | 58   |
| Manganese        | ppm      | ASTM D5185m |      | <b>&lt;1</b> | <1   | <1   |
| Magnesium        | ppm      | ASTM D5185m | 450  | <b>440</b>   | 973  | 926  |
| Calcium          | ppm      | ASTM D5185m | 3000 | <b>1321</b>  | 1100 | 1088 |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>1022</b>  | 1042 | 1012 |
| Zinc             | ppm      | ASTM D5185m | 1350 | <b>1239</b>  | 1287 | 1253 |
| Sulfur           | ppm      | ASTM D5185m | 4250 | <b>3658</b>  | 3265 | 3397 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>16.6</b>  | 14.9 | 16.0 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 8.5  | <b>6.7</b>   | 8.4  | 8.9  |
| Visc @ 100°C     | cSt      | ASTM D445   | 14.4 | <b>13.0</b>  | 12.8 | 12.8 |


**FT-IR (Direct Trend)**

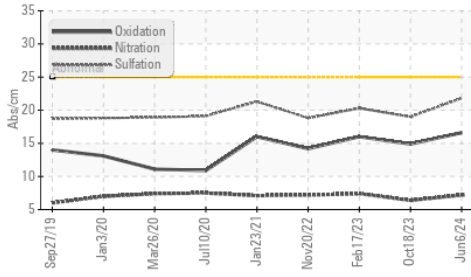


**Ferrous Alloys**

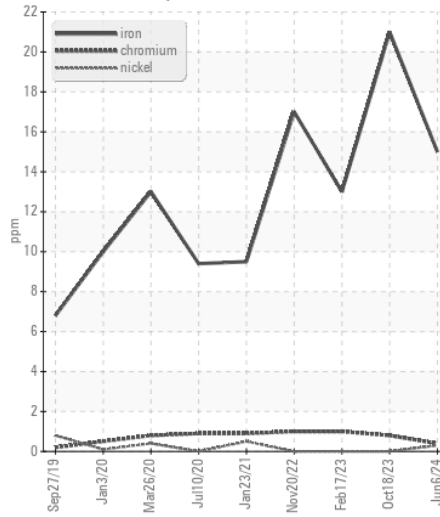


**Base Number**

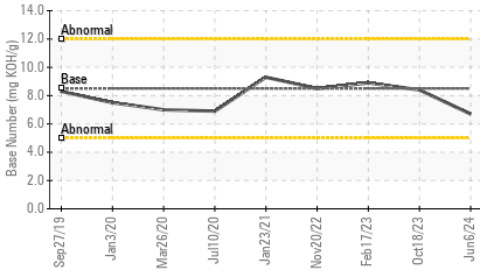


**Non-ferrous Metals**

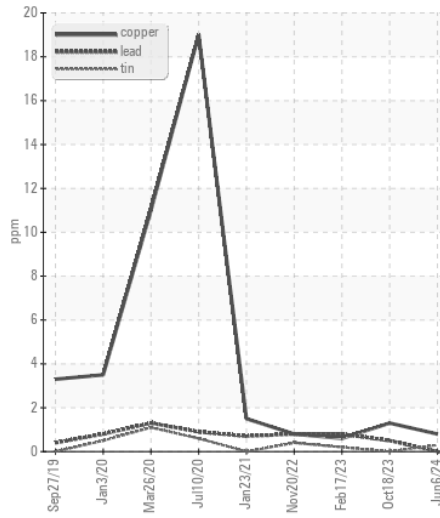


**Viscosity @ 100°C**

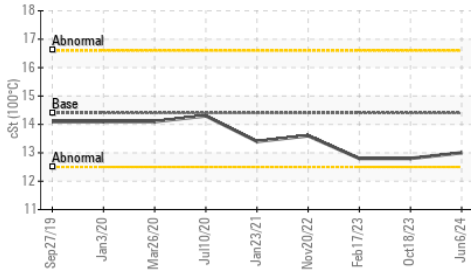

**Viscosity @ 100°C**

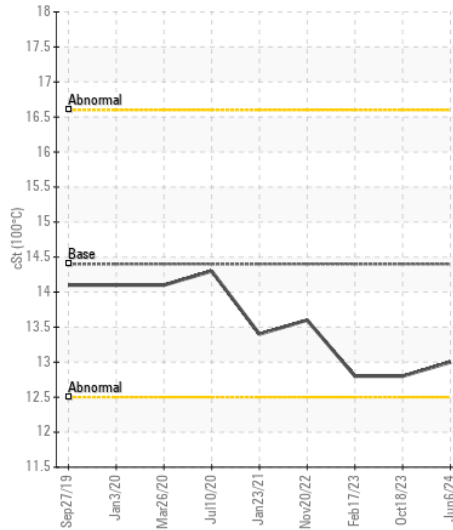

**Base Number**

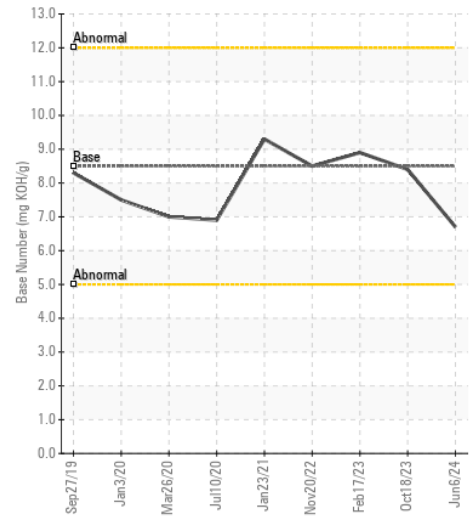

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0938999  
**Lab Number** : 06217612  
**Unique Number** : 11090476  
**Test Package** : FLEET

**Received** : 21 Jun 2024  
**Tested** : 24 Jun 2024  
**Diagnosed** : 24 Jun 2024 - Wes Davis

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)