



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**142028**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>IL06217734</b>	IL06068907	IL05847787
Sample Date		Client Info		<b>07 Jun 2024</b>	22 Dec 2023	26 Apr 2023
Machine Age	hrs	Client Info		<b>3155</b>	2553	1880
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>25</b>	35	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	4	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>1</b>	3	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	6	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.5	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>13.4</b>	12.3	5.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>26.0</b>	23.5	18.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>1</b>	2	1
Boron	ppm	ASTM D5185m	250	<b>10</b>	4	3
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>75</b>	71	58
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>1123</b>	1148	968
Calcium	ppm	ASTM D5185m	3000	<b>1452</b>	1286	1116
Phosphorus	ppm	ASTM D5185m	1150	<b>1178</b>	1180	1042
Zinc	ppm	ASTM D5185m	1350	<b>1501</b>	1492	1290
Sulfur	ppm	ASTM D5185m	4250	<b>3884</b>	3366	3837
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>26.5</b>	22.0	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.0</b>	7.5	10.3
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.1</b>	13.1	13.5

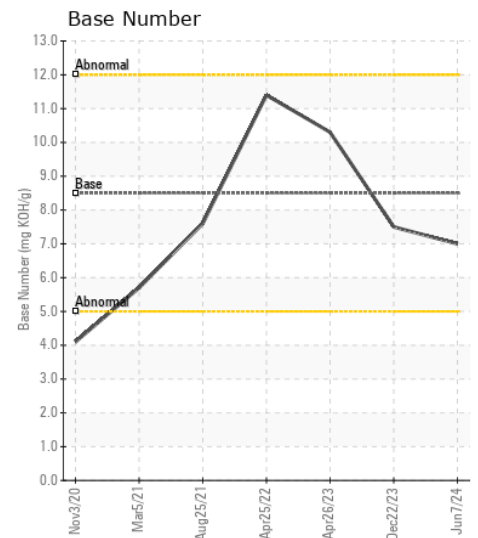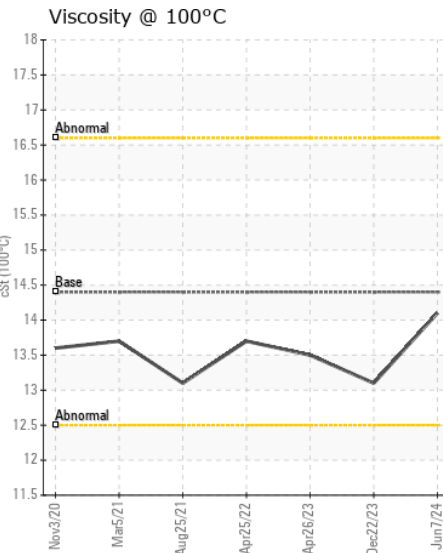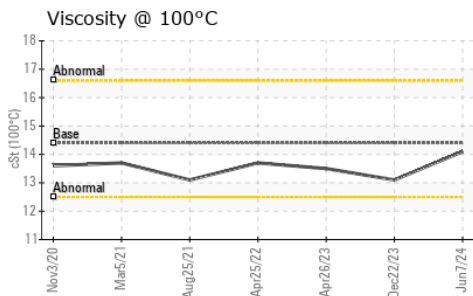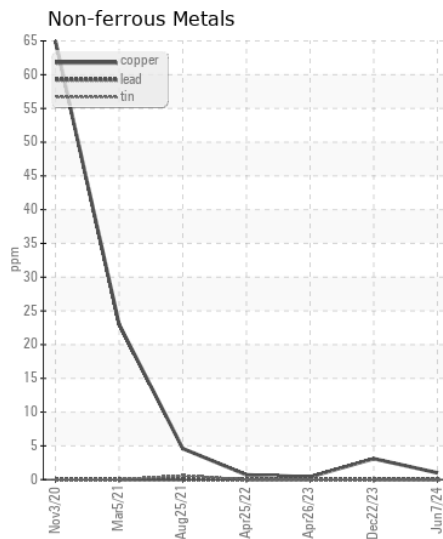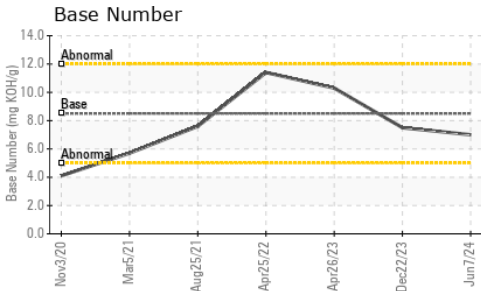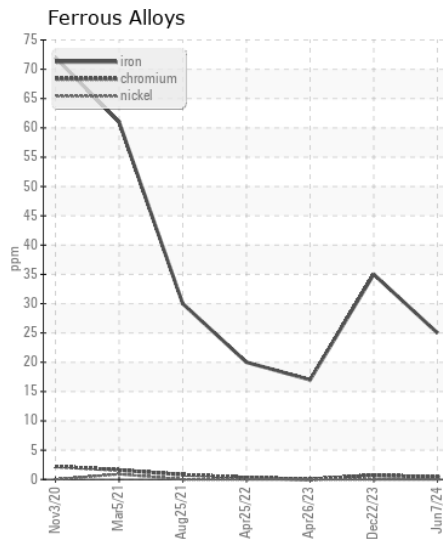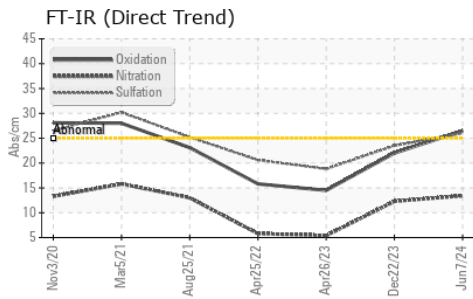

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL06217734  
**Lab Number** : 06217734  
**Unique Number** : 11090598  
**Test Package** : FLEET

**Received** : 24 Jun 2024  
**Tested** : 25 Jun 2024  
**Diagnosed** : 25 Jun 2024 - Don Baldrige

**RUSH TRUCK LEASING - CINCINNATI IDEALEASE**  
 11777 HIGHWAY DRIVE  
 CINCINNATI, OH  
 US 45241

Contact: ROBERT BAIER  
 baierr@rushenterprises.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (513)657-7901  
 F: (513)733-0537