



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8137
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06217793	IL06073725	IL05613509
Sample Date		Client Info		23 Jun 2024	29 Jan 2024	28 Jun 2022
Machine Age	mls	Client Info		0	0	0
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Piston, ring and cylinder wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	▲ 108	▲ 222	▲ 124
Chromium	ppm	ASTM D5185m	>20	2	3	2
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	▲ 25	35	67
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	3	5	21
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	13	14
Potassium	ppm	ASTM D5185m	>20	39	69	152
Fuel		WC Method	>5	<1.0	<1.0	▲ 2.6
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	1.1	0.7
Nitration	Abs/cm	*ASTM D7624	>20	14.3	14.7	13.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.5	27.4	27.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	0	1
Boron	ppm	ASTM D5185m	250	25	20	31
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	55	62	15
Manganese	ppm	ASTM D5185m		1	2	2
Magnesium	ppm	ASTM D5185m	450	506	515	631
Calcium	ppm	ASTM D5185m	3000	1922	1615	1272
Phosphorus	ppm	ASTM D5185m	1150	848	682	702
Zinc	ppm	ASTM D5185m	1350	1025	937	848
Sulfur	ppm	ASTM D5185m	4250	2831	2366	2579
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.2	29.2	19.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.1	4.7	6.9
Visc @ 100°C	cSt	ASTM D445	10.9	11.0	10.9	10.9

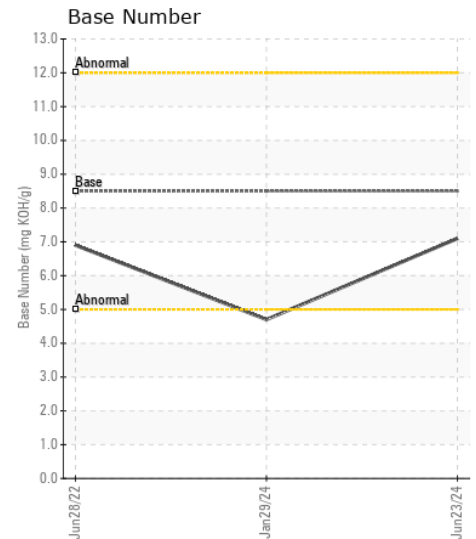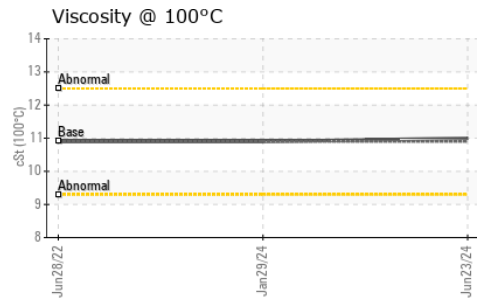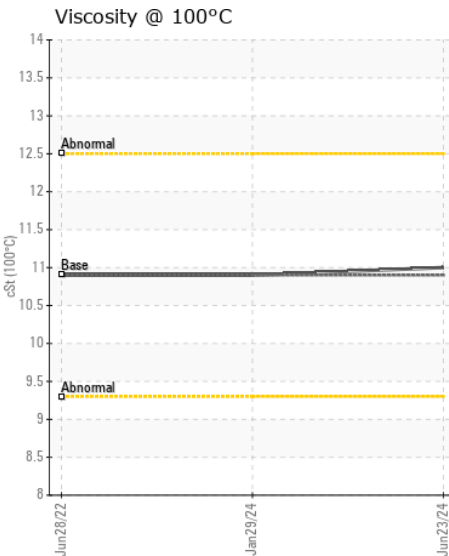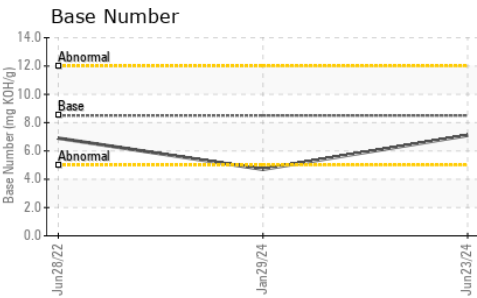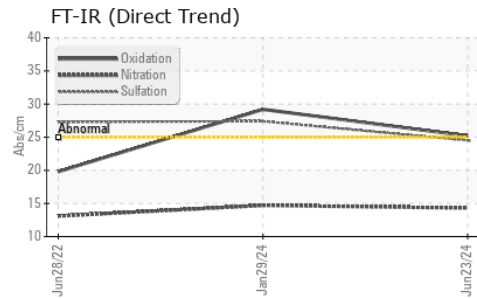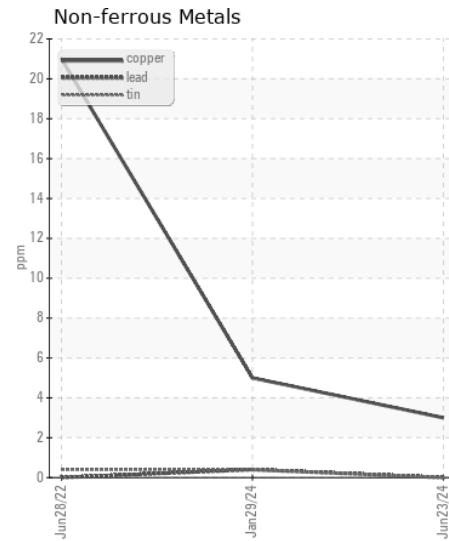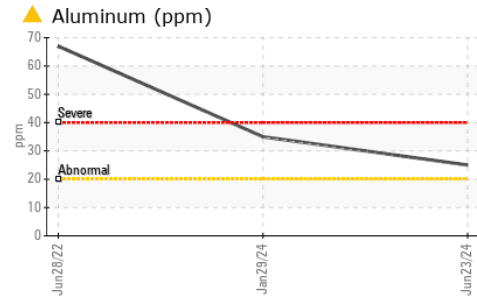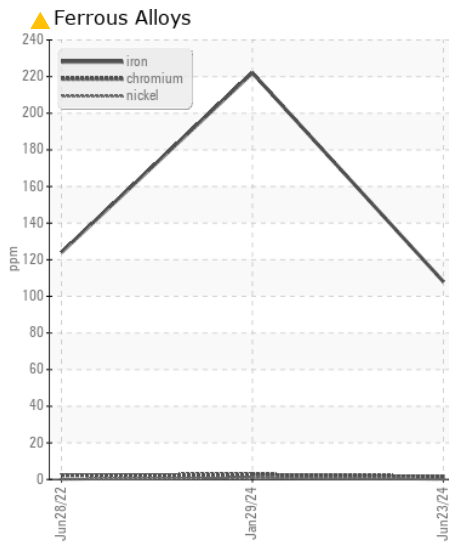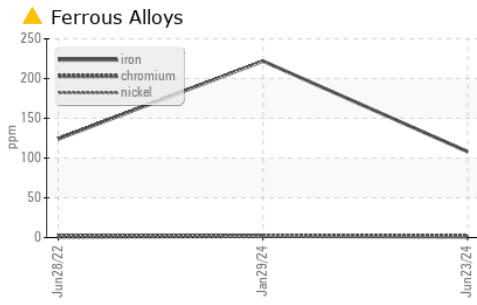

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06217793
Lab Number : 06217793
Unique Number : 11095990
Test Package : FLEET

IDEALASE-NORCROSS
 4571 NORTH BUFORD HWY
 NORCROSS, GA
 US 30071-2808
 Contact: RICK MARKS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (770)300-0614