



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
(61800Z) S0916A-Suamico

Machine Id
568000

Component
Front Center Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (42 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | GFL0115633 | --- | --- |
| Sample Date | | Client Info | | 31 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 15021 | --- | --- |
| Oil Age | hrs | Client Info | | 15021 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

Metal levels are typical for a components first oil change.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 25 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 5 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 5 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 1.7 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 11.6 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.6 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 1 | --- | --- |
| Boron | ppm | ASTM D5185m | 0 | 4 | --- | --- |
| Barium | ppm | ASTM D5185m | 0 | 1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 60 | 72 | --- | --- |
| Manganese | ppm | ASTM D5185m | 0 | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 1010 | 1039 | --- | --- |
| Calcium | ppm | ASTM D5185m | 1070 | 1262 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1087 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1270 | 1357 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 2060 | 3354 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.3 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 7.1 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.9 | --- | --- |

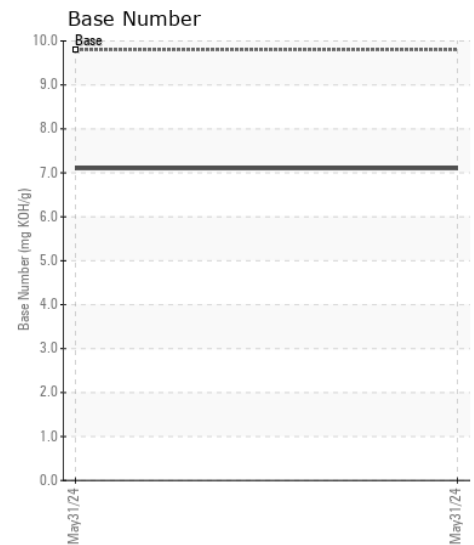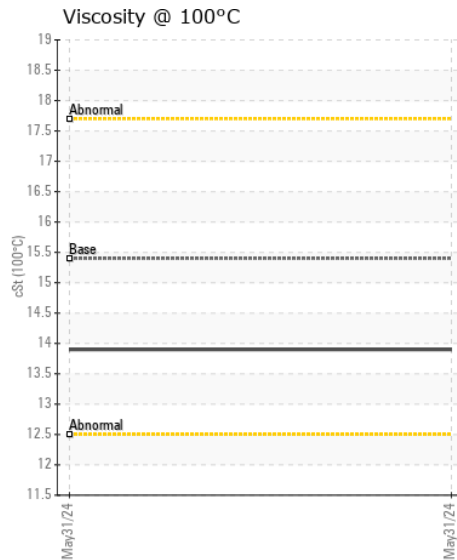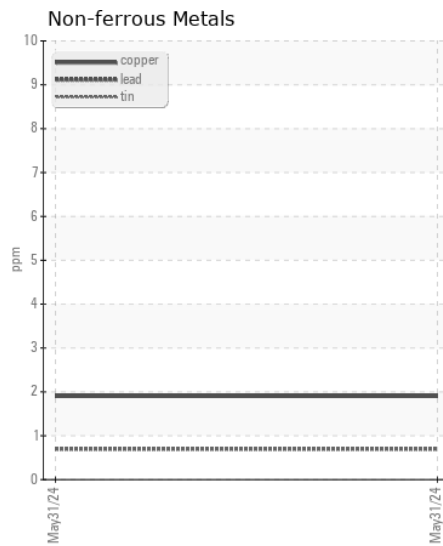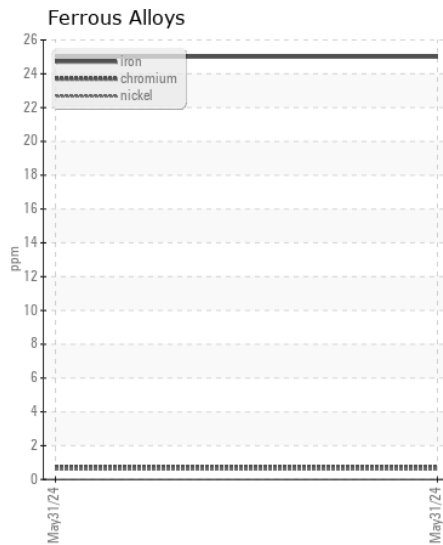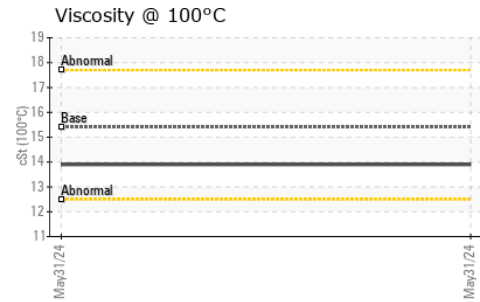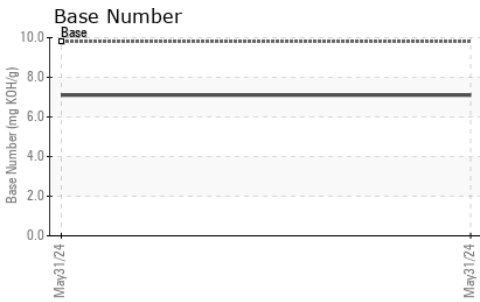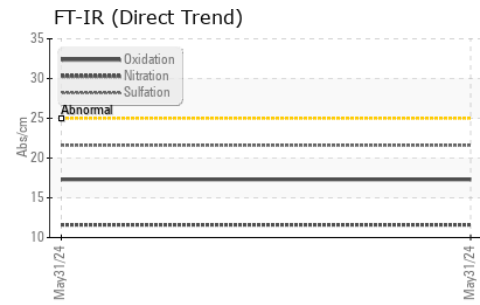

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115633
Lab Number : 06217816
Unique Number : 11096013
Test Package : FLEET

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

GFL Environmental - 916A - Suamico
 2300 Deerfield Ave E
 Suamico, WI
 US 54313
 Contact: NICHOLAS WEIDNER
 nweidner@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: