



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
180
Machine Id
2659
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0115807 | GFL0115797 | GFL0115833 |
| Sample Date | | Client Info | | 18 Jun 2024 | 10 Jun 2024 | 01 May 2024 |
| Machine Age | hrs | Client Info | | 31121 | 31089 | 31038 |
| Oil Age | hrs | Client Info | | 1005 | 973 | 922 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | N/A | Not Changd | Not Changd |
| Filter Changed | | Client Info | | N/A | N/A | N/A |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >120 | 28 | 21 | 18 |
| Chromium | ppm | ASTM D5185m | >20 | 1 | <1 | 0 |
| Nickel | ppm | ASTM D5185m | >5 | <1 | <1 | 0 |
| Titanium | ppm | ASTM D5185m | >2 | <1 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >2 | <1 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 3 | 2 | 2 |
| Lead | ppm | ASTM D5185m | >40 | 4 | <1 | 1 |
| Copper | ppm | ASTM D5185m | >330 | 2 | 1 | 0 |
| Tin | ppm | ASTM D5185m | >15 | 1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 9 | 6 | 5 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 3 | 2 |
| Fuel | | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >4 | 2.1 | 1.8 | 1.5 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 6.8 | 6.4 | 6.1 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.0 | 19.3 | 19.1 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 1 | 2 | 3 |
| Boron | ppm | ASTM D5185m | 0 | 11 | 13 | 14 |
| Barium | ppm | ASTM D5185m | 0 | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 65 | 64 | 62 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | <1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 843 | 910 | 867 |
| Calcium | ppm | ASTM D5185m | 1070 | 1092 | 1104 | 1038 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 942 | 1045 | 984 |
| Zinc | ppm | ASTM D5185m | 1270 | 1134 | 1218 | 1143 |
| Sulfur | ppm | ASTM D5185m | 2060 | 2823 | 3506 | 3373 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 12.5 | 12.3 | 12.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.4 | 8.5 | 8.9 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.8 | 13.5 | 13.6 |

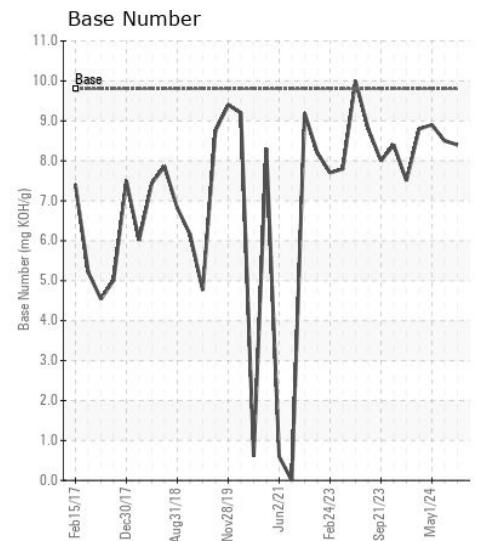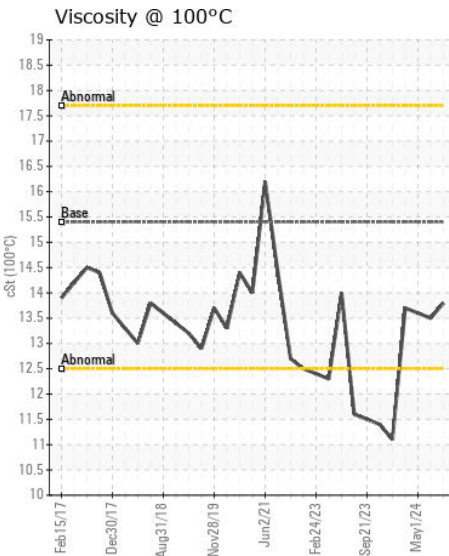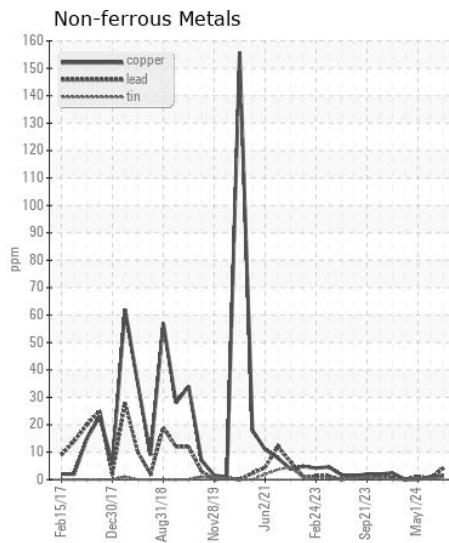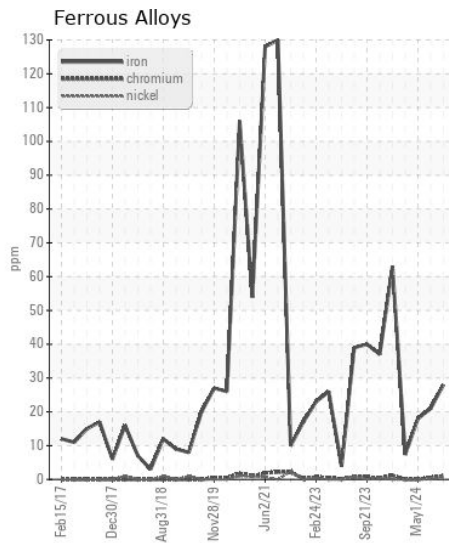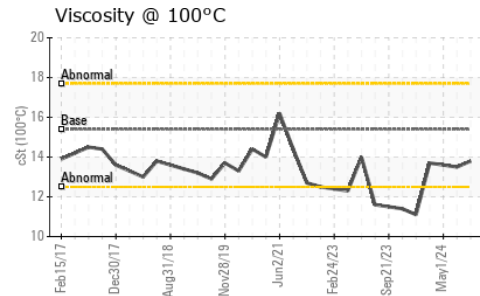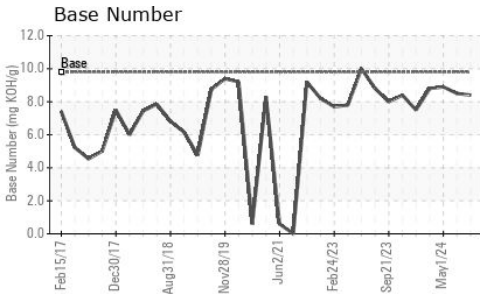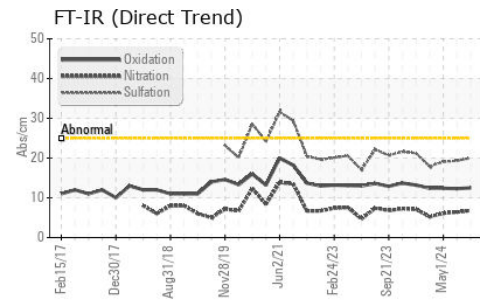

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115807
Lab Number : 06217825
Unique Number : 11096022
Test Package : FLEET

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)
 13737 Plant Rd
 Childersburg, AL
 US 35044

Contact: JONATHAN WILLIAMS
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: