



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(P662077)

Machine Id

10911C

Component

Natural Gas Engine

Fluid

PETRO CANADA DURON GEO LD 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0124434	GFL0110386	GFL0092331
Sample Date		Client Info		21 Jun 2024	01 May 2024	11 Sep 2023
Machine Age	hrs	Client Info		26110	10825	0
Oil Age	hrs	Client Info		24053	12882	0
Filter Age	hrs	Client Info		0	12882	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	6	6	6
Chromium	ppm	ASTM D5185m	>4	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>9	3	<1	2
Lead	ppm	ASTM D5185m	>30	<1	1	0
Copper	ppm	ASTM D5185m	>35	1	<1	0
Tin	ppm	ASTM D5185m	>4	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>+100	5	5	10
Potassium	ppm	ASTM D5185m	>20	3	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.1	7.7	6.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	18.8	18.3
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	4	5
Boron	ppm	ASTM D5185m	50	22	32	6
Barium	ppm	ASTM D5185m	5	1	0	0
Molybdenum	ppm	ASTM D5185m	50	55	55	61
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	560	590	633	929
Calcium	ppm	ASTM D5185m	1510	1525	1606	1161
Phosphorus	ppm	ASTM D5185m	780	783	861	1015
Zinc	ppm	ASTM D5185m	870	965	1003	1253
Sulfur	ppm	ASTM D5185m	2040	2399	2960	3585
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	15.6	14.0
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	7.2	7.8	8.6
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	14.4	14.3

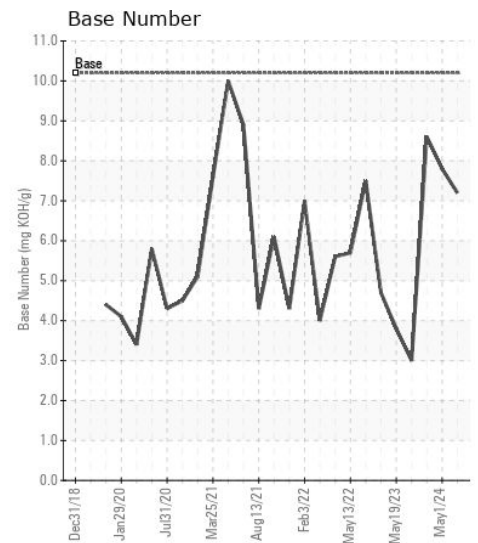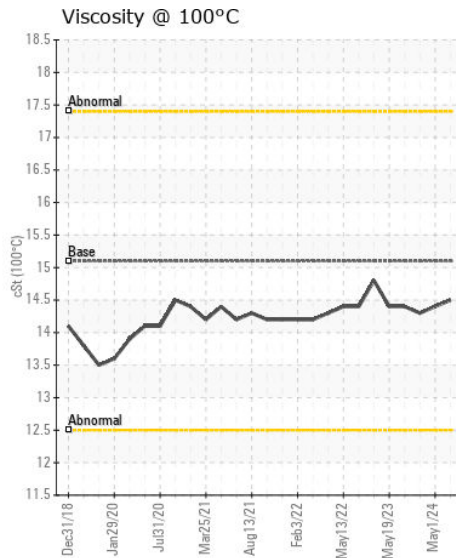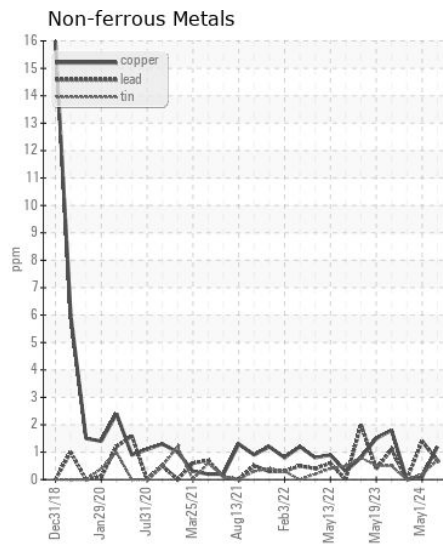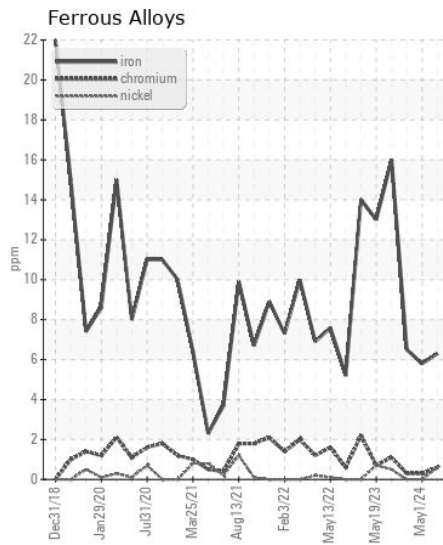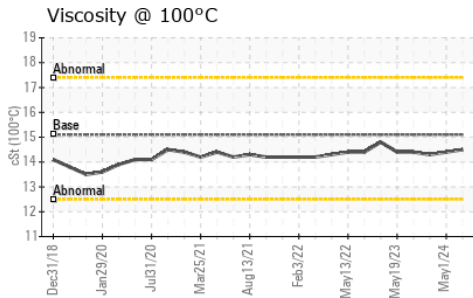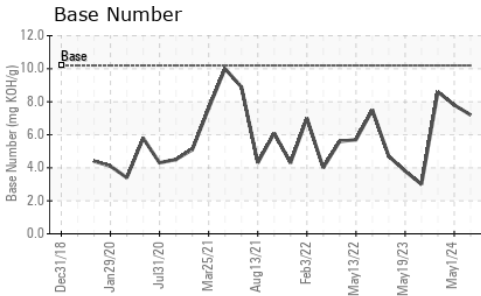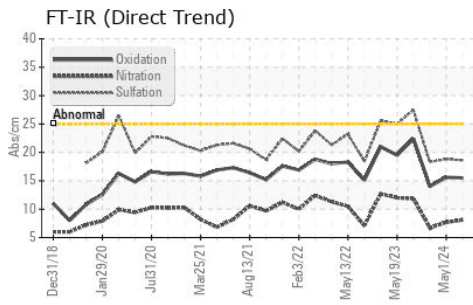

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0124434
Lab Number : 06217864
Unique Number : 11096061
Test Package : FLEET

Received : 24 Jun 2024
Tested : 25 Jun 2024
Diagnosed : 25 Jun 2024 - Wes Davis

GFL Environmental - 031 - Greenville/Spartanburg
 1635 Antioch Church Rd
 Piedmont, SC
 US 29673
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: