



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
NOT GIVNE RPL0019525

Component
Diesel Engine

Fluid
{not provided} (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0019525	---	---
Sample Date		Client Info		23 Jun 2024	---	---
Machine Age	mls	Client Info		0	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	6	---	---
Lead	ppm	ASTM D5185m	>40	1	---	---
Copper	ppm	ASTM D5185m	>330	9	---	---
Tin	ppm	ASTM D5185m	>15	2	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	---	---
Potassium	ppm	ASTM D5185m	>20	21	---	---
Fuel	%	ASTM D3524	>5	0.3	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	8.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		65	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		13	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		764	---	---
Calcium	ppm	ASTM D5185m		1295	---	---
Phosphorus	ppm	ASTM D5185m		779	---	---
Zinc	ppm	ASTM D5185m		908	---	---
Sulfur	ppm	ASTM D5185m		3073	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.2	---	---
Visc @ 100°C	cSt	ASTM D445		11.7	---	---

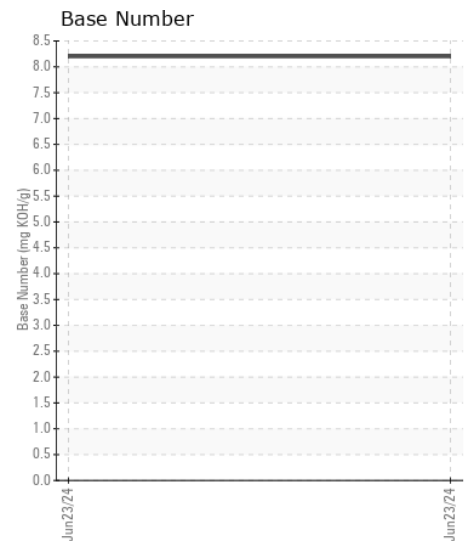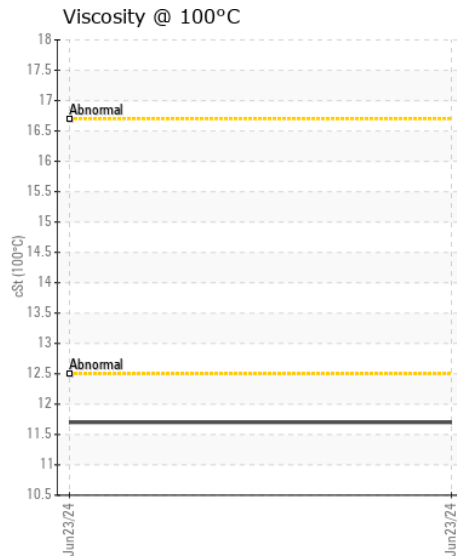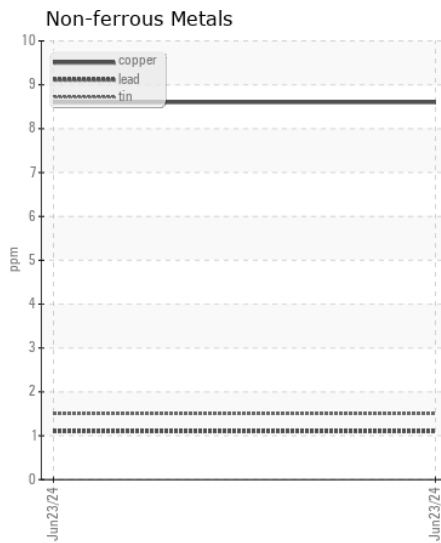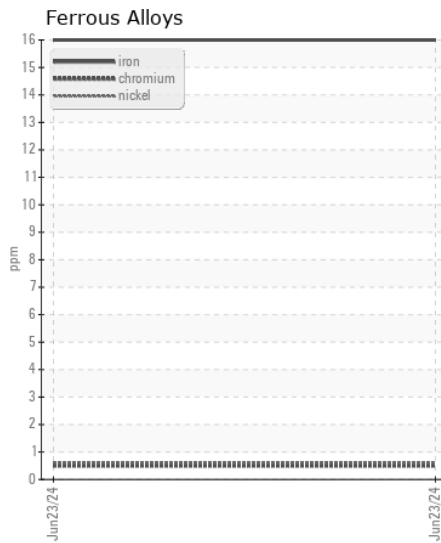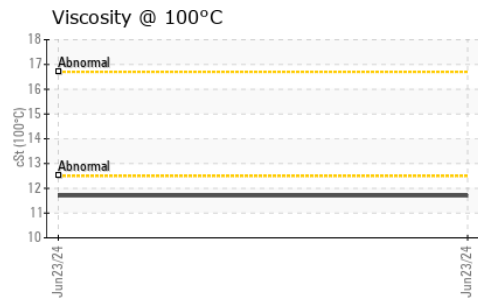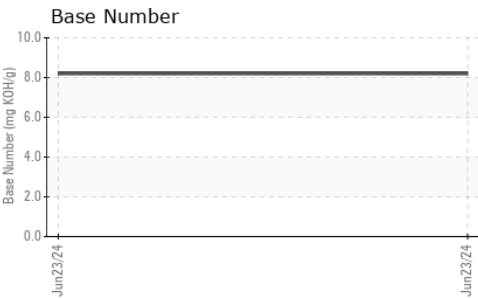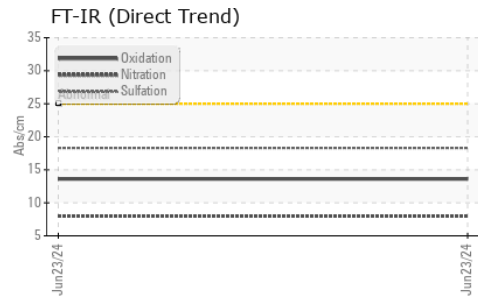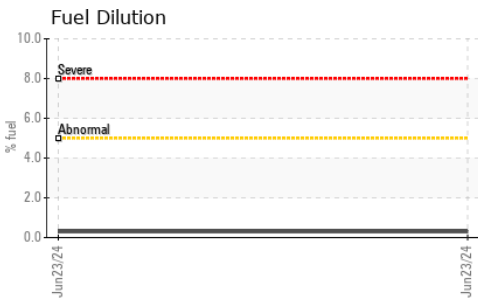

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : RPL0019525

Lab Number : 06217881

Unique Number : 11096078

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 24 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 27 Jun 2024 - Jonathan Hester

RTL PACLEASE - 7013 - Albuquerque

901 64th St. N.W.

Albuquerque, NM

US 87121

Contact: TECHNICIAN ACCOUNT

catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: