



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
NOT GIVEN WC0952692

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.
Please specify the component make and model with your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | WC0952692 | --- | --- |
| Sample Date | | Client Info | | 23 Jun 2024 | --- | --- |
| Machine Age | mls | Client Info | | 0 | --- | --- |
| Oil Age | mls | Client Info | | 0 | --- | --- |
| Filter Age | mls | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 13 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | 1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | <1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | <1 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 6 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 21 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION

There is no indication of any contamination in the oil.


| | | | | | | |
|------------------|----------|-------------|-------|----------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 5 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 7 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.4 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.5 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.0 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | >216 | <1 | --- | --- |
| Boron | ppm | ASTM D5185m | 250 | 243 | --- | --- |
| Barium | ppm | ASTM D5185m | 10 | 1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 84 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 506 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 1311 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1012 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 1267 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 2959 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 16.5 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 7.1 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 13.7 | --- | --- |


FT-IR (Direct Trend)

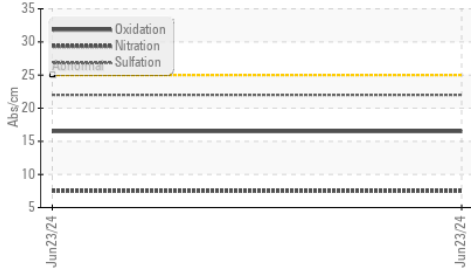


Base Number

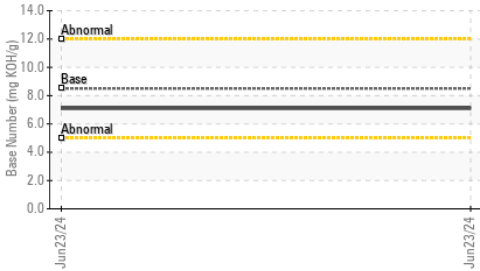


Viscosity @ 100°C

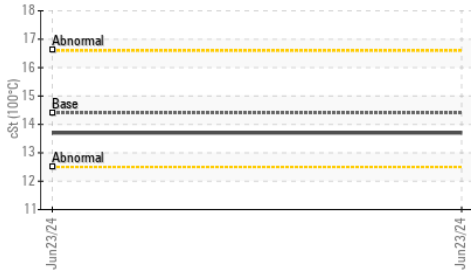


Ferrous Alloys

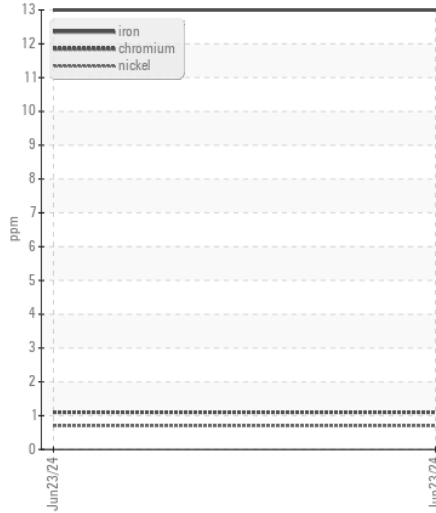


Non-ferrous Metals

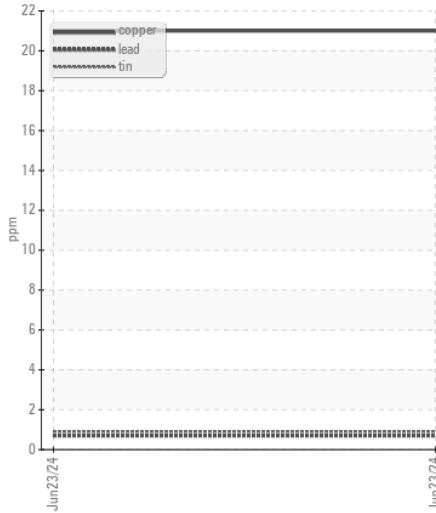

Viscosity @ 100°C

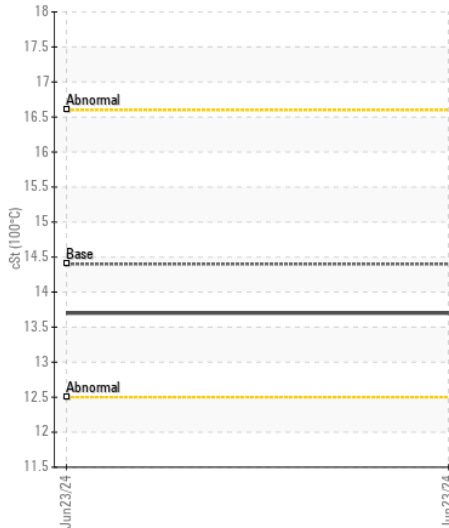

Base Number

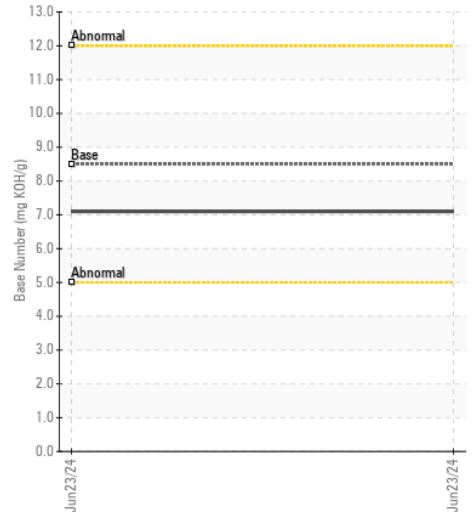

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0952692
 Lab Number : 06217885
 Unique Number : 11096082
 Test Package : FLEET

Received : 24 Jun 2024
 Tested : 25 Jun 2024
 Diagnosed : 25 Jun 2024 - Wes Davis

SALEM NATIONALEASE CORPORATION
 198 PARK PLAZA DRIVE
 WINSTON SALEM, NC
 US 27105
 Contact: Audrey Hopkins
 Audrey.Hopkins@salemcorp.com
 T: (336)767-9642
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)