



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO EC200EL 3036 (S/N VOLVO)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (5 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005550	CL0005179	---
Sample Date		Client Info		13 Jun 2024	17 Feb 2024	---
Machine Age	hrs	Client Info		530	280	---
Oil Age	hrs	Client Info		250	280	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	16	23	---
Chromium	ppm	ASTM D5185m	>10	<1	2	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	7	8	---
Lead	ppm	ASTM D5185m	>20	0	<1	---
Copper	ppm	ASTM D5185m	>15	2	8	---
Tin	ppm	ASTM D5185m	>10	<1	3	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	8	22	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Fuel		WC Method	>6.0	<1.0	<1.0	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.4	6.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	16.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	1	2	---
Boron	ppm	ASTM D5185m	250	52	4	---
Barium	ppm	ASTM D5185m	10	0	0	---
Molybdenum	ppm	ASTM D5185m	100	79	10	---
Manganese	ppm	ASTM D5185m		<1	3	---
Magnesium	ppm	ASTM D5185m	450	33	50	---
Calcium	ppm	ASTM D5185m	3000	2446	1993	---
Phosphorus	ppm	ASTM D5185m	1150	1104	823	---
Zinc	ppm	ASTM D5185m	1350	1338	953	---
Sulfur	ppm	ASTM D5185m	4250	4642	3355	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.3	10.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.4	6.7	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	13.4	---


FT-IR (Direct Trend)

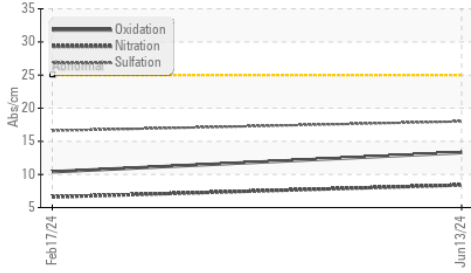


Base Number




Viscosity @ 100°C

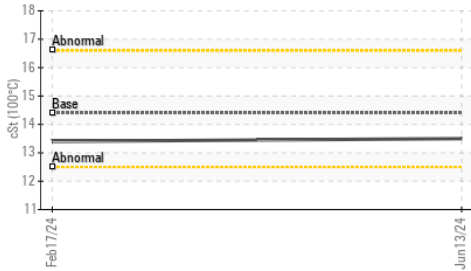


Ferrous Alloys

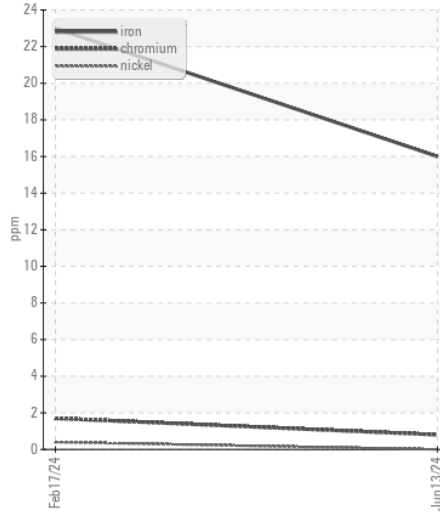


Non-ferrous Metals

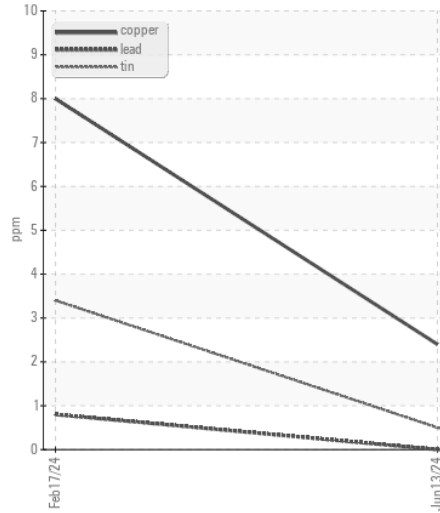

Viscosity @ 100°C

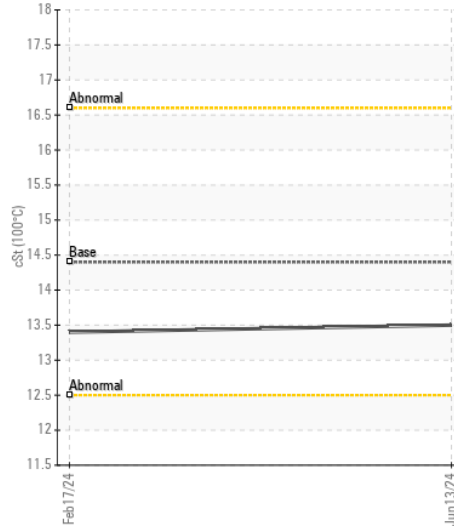

Base Number

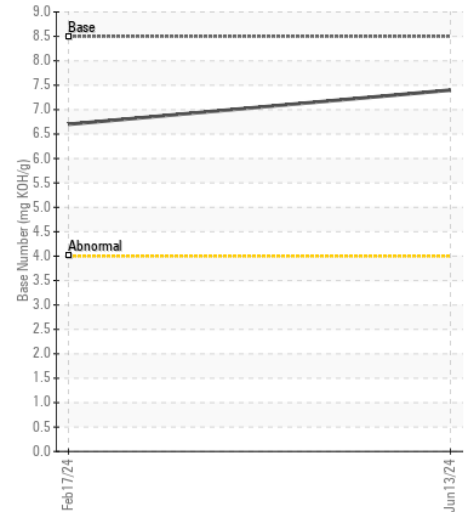

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : CL0005550 Received : 24 Jun 2024
 Lab Number : 06217903 Tested : 25 Jun 2024
 Unique Number : 11096100 Diagnosed : 25 Jun 2024 - Wes Davis
 Test Package : CONST (Additional Tests: TBN)

PURCELL CONSTRUCTION
 3100 HIGH RIDGE RD
 CHARLOTTE, NC
 US 28270
 Contact: BEN MILKE
 ben@purcellconst.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: