



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HITACHI ZX135 4004 (S/N 100035)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CL0005564	CL0004494	CL0003946
Sample Date		Client Info		15 Jun 2024	23 Jul 2023	22 Jan 2023
Machine Age	hrs	Client Info		6575	6320	6035
Oil Age	hrs	Client Info		255	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	5	6	14
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	9	7	17
Lead	ppm	ASTM D5185m	>40	0	0	1
Copper	ppm	ASTM D5185m	>330	<1	0	2
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	3	3	6
Potassium	ppm	ASTM D5185m	>20	0	0	1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.1	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.3	18.1	19.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<1	<1	2
Boron	ppm	ASTM D5185m	250	49	62	56
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	90	90	96
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	450	16	25	41
Calcium	ppm	ASTM D5185m	3000	2424	2311	2551
Phosphorus	ppm	ASTM D5185m	1150	1117	1080	1148
Zinc	ppm	ASTM D5185m	1350	1326	1305	1365
Sulfur	ppm	ASTM D5185m	4250	4585	4756	4726
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.3	13.2	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.3	7.6	6.5
Visc @ 100°C	cSt	ASTM D445	14.4	13.1	13.1	13.4


FT-IR (Direct Trend)

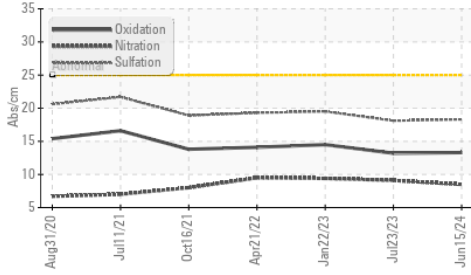


Ferrous Alloys

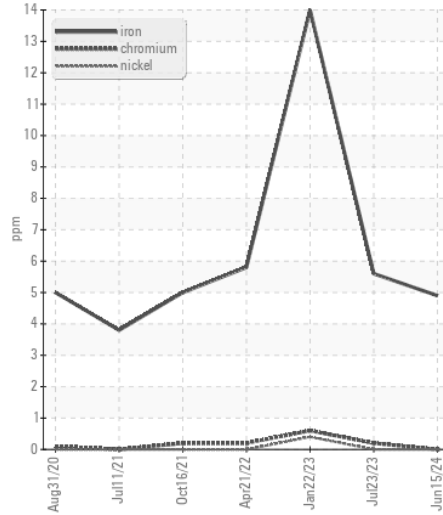


Base Number

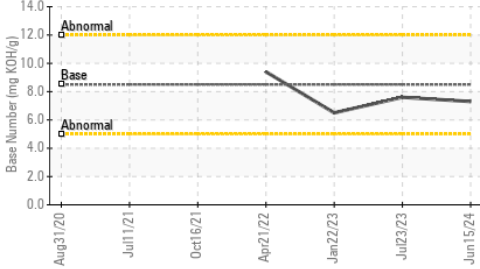


Non-ferrous Metals

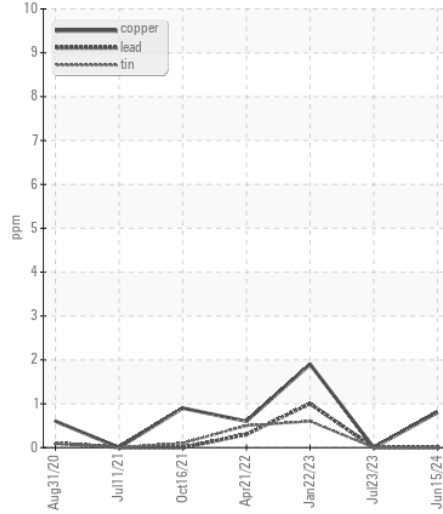


Viscosity @ 100°C

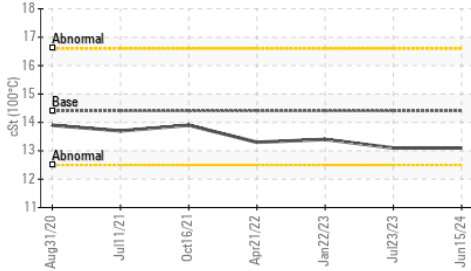

Viscosity @ 100°C

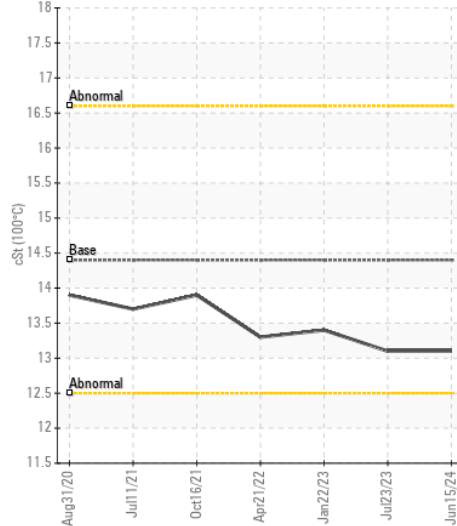

Base Number

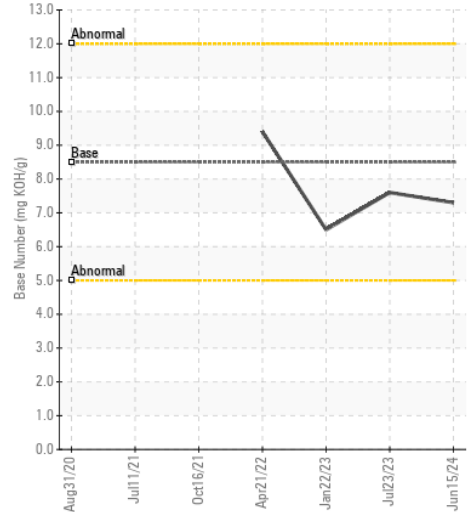

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : CL0005564 **Received** : 24 Jun 2024
Lab Number : 06217909 **Tested** : 25 Jun 2024
Unique Number : 11096106 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

BAKER AR
 8819 COLUMBUS RD
 DAVIDSON, NC
 US 28036
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: