



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
AHE
Machine Id
Component
AHE
Center Main Engine
Fluid
CHEVRON DELO 710 LS (350 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0054984	MW0054993	MW0050631
Sample Date		Client Info		29 May 2024	23 Jun 2023	05 May 2023
Machine Age	hrs	Client Info		7558	6385	5016
Oil Age	hrs	Client Info		7356	6385	5016
Filter Age	hrs	Client Info		1179	1157	1076
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	21	17	18
Chromium	ppm	ASTM D5185m	>8	1	2	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>15	2	2	1
Lead	ppm	ASTM D5185m	>18	8	9	9
Copper	ppm	ASTM D5185m	>80	15	15	16
Tin	ppm	ASTM D5185m	>14	9	8	8
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	3	4	3
Potassium	ppm	ASTM D5185m	>20	0	<1	0
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.9	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.0	18.0	18.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	2	1
Boron	ppm	ASTM D5185m		36	44	39
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		47	47	45
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		32	15	13
Calcium	ppm	ASTM D5185m		3871	3551	3643
Phosphorus	ppm	ASTM D5185m		24	8	9
Zinc	ppm	ASTM D5185m		29	0	0
Sulfur	ppm	ASTM D5185m		2742	2601	2693
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.6	12.6	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	7.3	7.5	7.7
Visc @ 100°C	cSt	ASTM D445	15.5	15.0	14.8	15.0


FT-IR (Direct Trend)

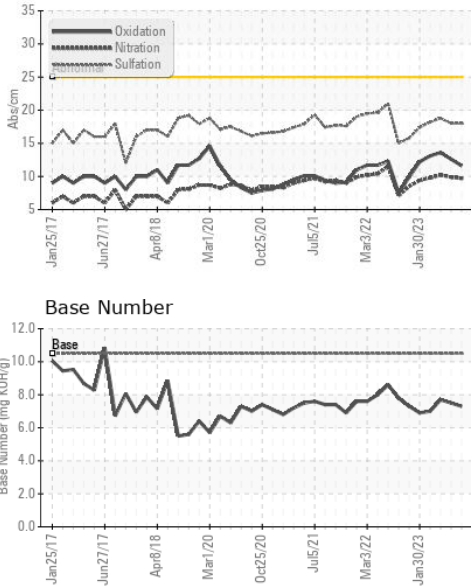


Base Number

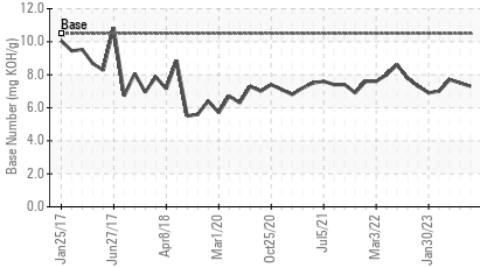


Viscosity @ 100°C

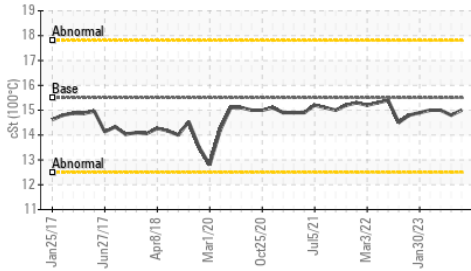


Ferrous Alloys

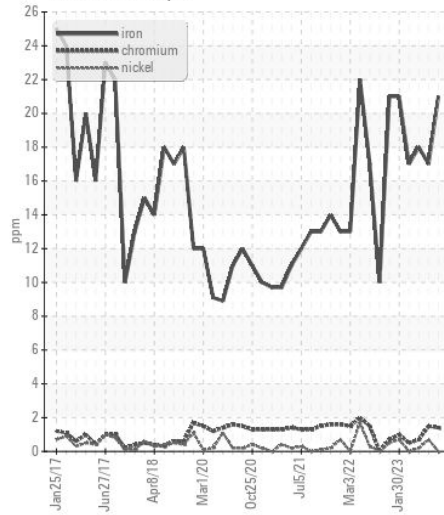


Non-ferrous Metals

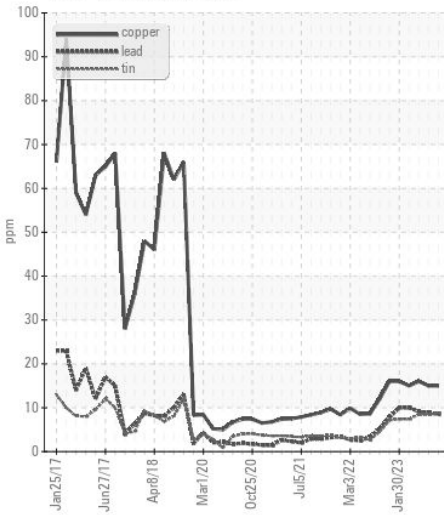

Viscosity @ 100°C

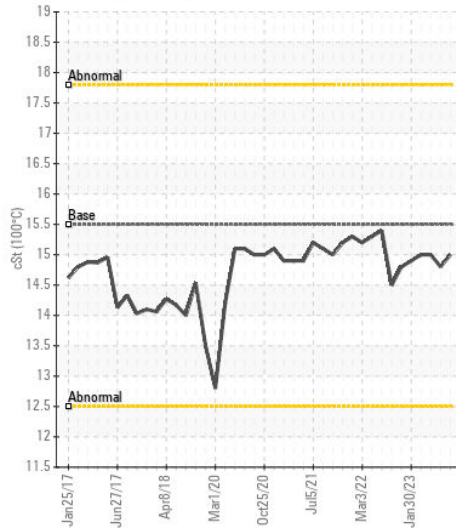

Base Number

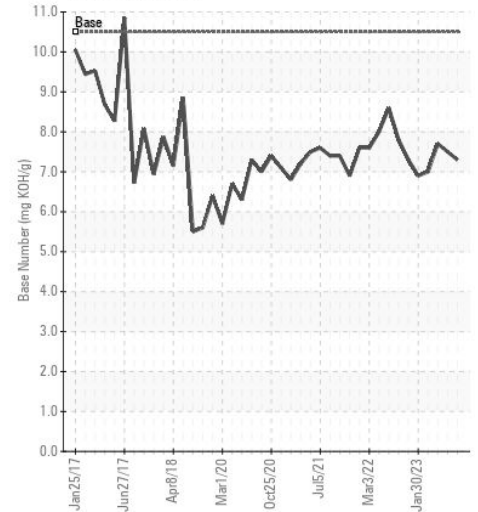

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0054984

Lab Number : 06217939

Unique Number : 11096136

Test Package : MAR 2

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Don Baldrige

AMERICAN RIVER TRANSPORTATION CO.

P.O. BOX 2889

ST. LOUIS, MO

US 63111

Contact: BRIAN GRIEWING

brian.griewing@adm.com

T:

F: (314)481-5278

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)