



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[47621]

Machine Id

JOHN DEERE 1FF085GKTKJ021130

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218673	JR0091695	JR0069009
Sample Date		Client Info		21 Jun 2024	19 May 2021	09 Nov 2020
Machine Age	hrs	Client Info		4395	1650	1026
Oil Age	hrs	Client Info		2745	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	16	19	18
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	2
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>31	5	5	6
Lead	ppm	ASTM D5185m	>26	0	<1	0
Copper	ppm	ASTM D5185m	>26	1	1	<1
Tin	ppm	ASTM D5185m	>4	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	11	13	15
Potassium	ppm	ASTM D5185m	>20	0	2	13
Fuel	%	ASTM D3524	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.6	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	9.2	10.1	9.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	25.4	23.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<1	3	2
Boron	ppm	ASTM D5185m		150	222	184
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		177	273	234
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		637	861	849
Calcium	ppm	ASTM D5185m		2309	1538	1470
Phosphorus	ppm	ASTM D5185m		1042	906	829
Zinc	ppm	ASTM D5185m		1274	1082	985
Sulfur	ppm	ASTM D5185m		3900	2628	2393
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	20.5	18
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.1	9.4	9.5
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	14.6	14.6

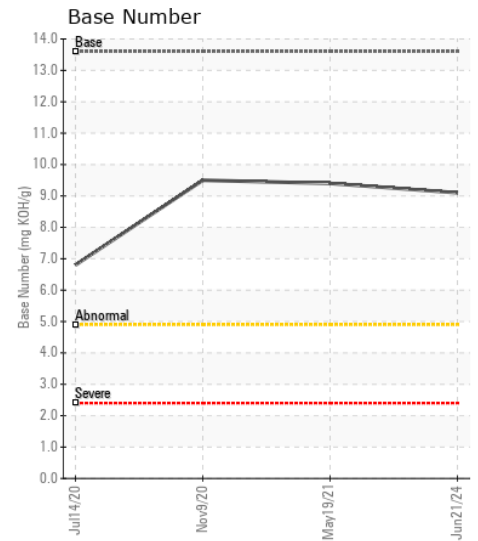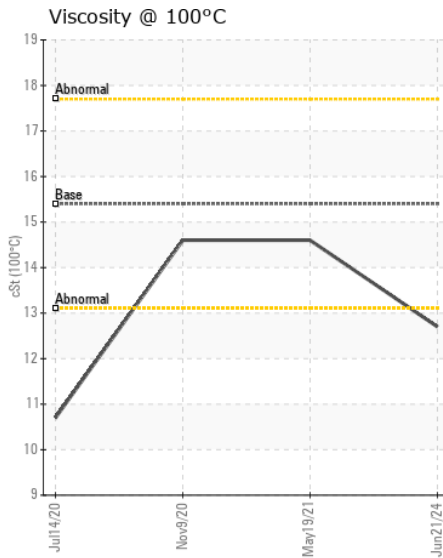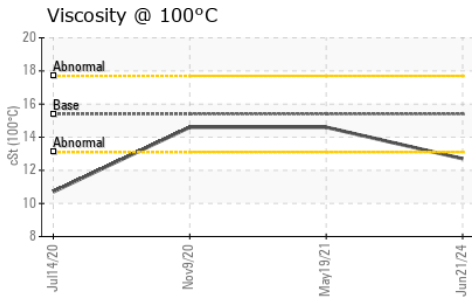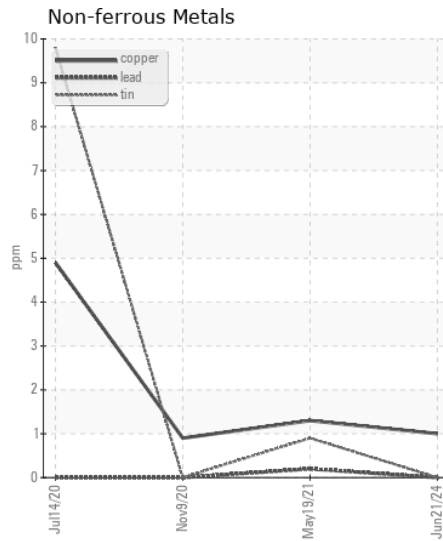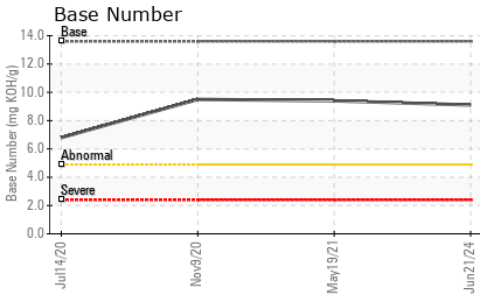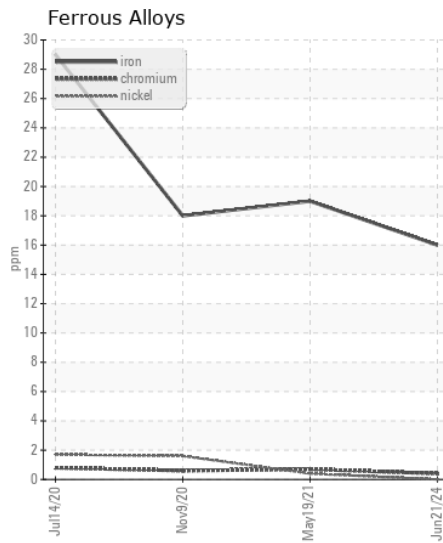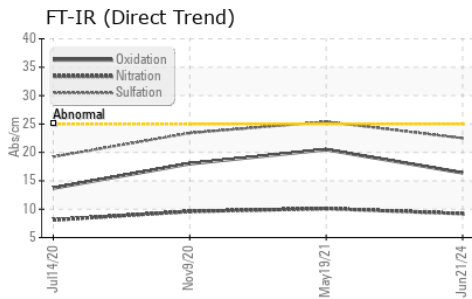

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218673 **Received** : 24 Jun 2024
Lab Number : 06217971 **Tested** : 25 Jun 2024
Unique Number : 11096168 **Diagnosed** : 25 Jun 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: FuelDilution, TBN)

CWS-STRITTMATTER
 9102 OWENS DR
 MANASSAS PARK, VA
 US 20111

Contact: EDDIE GARRETSON
 egarretson@strittmattercompanies.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (703)335-2255
 F: (703)335-8095