



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 350GLC 1FF350GXCEF810248
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0222594	JR0175086	---
Sample Date		Client Info		21 Jun 2024	26 May 2023	---
Machine Age	hrs	Client Info		10561	9714	---
Oil Age	hrs	Client Info		9714	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	20	34	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	0	2	---
Titanium	ppm	ASTM D5185m		79	87	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>31	2	2	---
Lead	ppm	ASTM D5185m	>26	<1	1	---
Copper	ppm	ASTM D5185m	>26	<1	1	---
Tin	ppm	ASTM D5185m	>4	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	8	6	---
Potassium	ppm	ASTM D5185m	>20	3	5	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	6.9	8.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	21.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	0	1	---
Boron	ppm	ASTM D5185m		121	103	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		8	15	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		468	401	---
Calcium	ppm	ASTM D5185m		1940	1887	---
Phosphorus	ppm	ASTM D5185m		1097	1057	---
Zinc	ppm	ASTM D5185m		1369	1254	---
Sulfur	ppm	ASTM D5185m		4879	4150	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.0	16.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.7	8.4	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.17	---

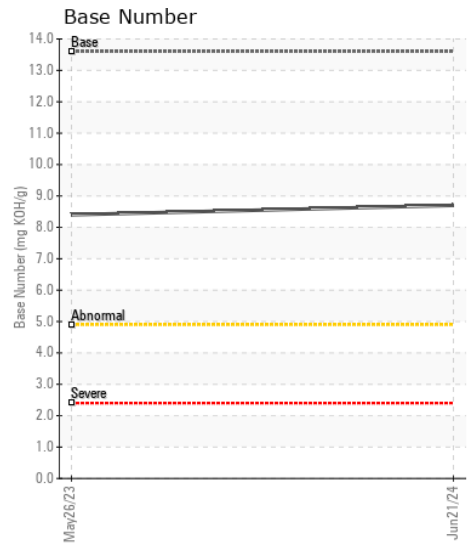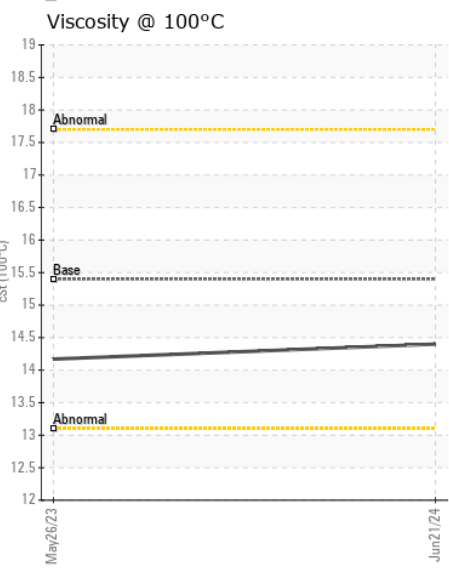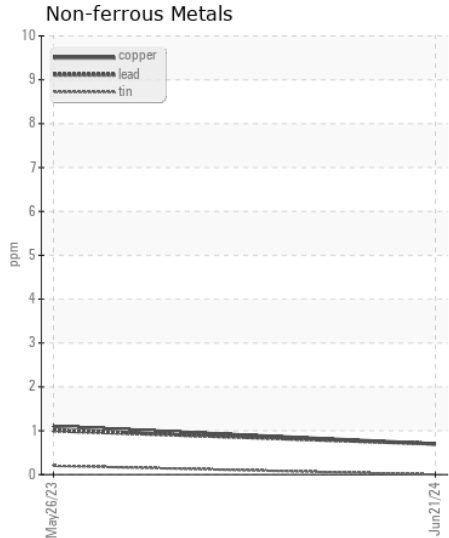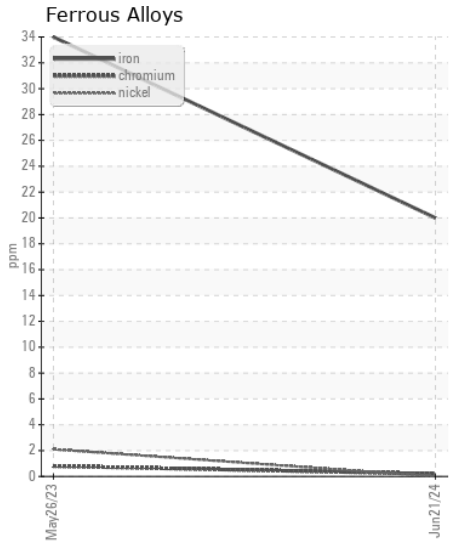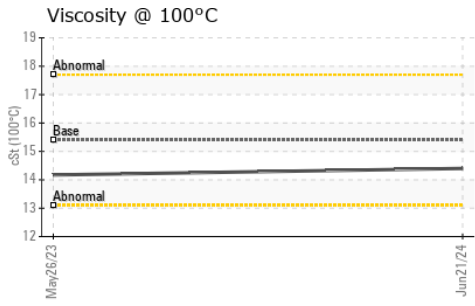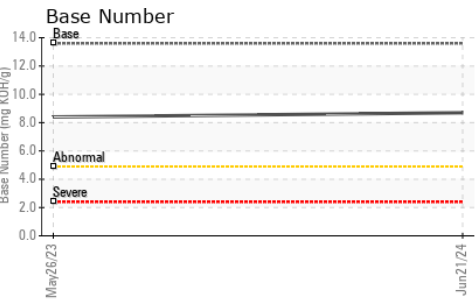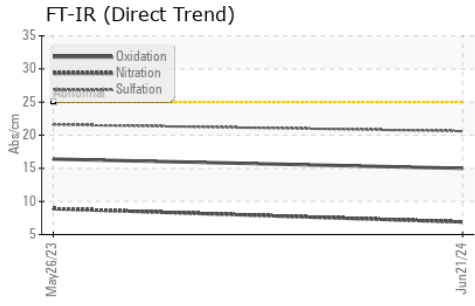

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0222594 **Received** : 24 Jun 2024
Lab Number : 06217989 **Tested** : 25 Jun 2024
Unique Number : 11096186 **Diagnosed** : 25 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: TBN)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)614-2260

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (919)779-5432