



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | SEVERE |
| FLUID CONDITION | SEVERE |



Machine Id
JOHN DEERE 410E 1DW410ELJNF713348

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (48 QTS)

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|----------|
| Sample Number | | Client Info | | JR0213873 | JR0200672 | --- |
| Sample Date | | Client Info | | 21 Jun 2024 | 28 Feb 2024 | --- |
| Machine Age | hrs | Client Info | | 3970 | 3511 | --- |
| Oil Age | hrs | Client Info | | 0 | 3511 | --- |
| Filter Age | hrs | Client Info | | 0 | 0 | --- |
| Oil Changed | | Client Info | | Changed | Changed | --- |
| Filter Changed | | Client Info | | Changed | Changed | --- |
| Sample Status | | | | SEVERE | ABNORMAL | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|-----|
| Iron | ppm | ASTM D5185m | >51 | 9 | 8 | --- |
| Chromium | ppm | ASTM D5185m | >11 | 0 | <1 | --- |
| Nickel | ppm | ASTM D5185m | >5 | 0 | <1 | --- |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | --- |
| Aluminum | ppm | ASTM D5185m | >31 | 3 | 4 | --- |
| Lead | ppm | ASTM D5185m | >26 | 9 | 3 | --- |
| Copper | ppm | ASTM D5185m | >26 | 6 | 6 | --- |
| Tin | ppm | ASTM D5185m | >4 | <1 | 2 | --- |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | --- |
| White Metal | scalar | *Visual | NONE | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | --- |

CONTAMINATION









There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|---------------|-------|-----|
| Silicon | ppm | ASTM D5185m | >22 | 5 | 6 | --- |
| Potassium | ppm | ASTM D5185m | >20 | <1 | 1 | --- |
| Fuel | % | ASTM D3524 | >8.0 | ▲ 20.1 | 7.2 | --- |
| Water | | WC Method | >0.21 | NEG | NEG | --- |
| Glycol | | WC Method | | NEG | NEG | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | 0.2 | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 8.7 | 8.3 | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 21.6 | 20.9 | --- |
| Silt | scalar | *Visual | NONE | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.21 | NEG | NEG | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

| | | | | | | |
|------------------|----------|-------------|------|--------------|--------|-----|
| Sodium | ppm | ASTM D5185m | >31 | 2 | 3 | --- |
| Boron | ppm | ASTM D5185m | | 123 | 179 | --- |
| Barium | ppm | ASTM D5185m | | 0 | 0 | --- |
| Molybdenum | ppm | ASTM D5185m | | 202 | 237 | --- |
| Manganese | ppm | ASTM D5185m | | <1 | <1 | --- |
| Magnesium | ppm | ASTM D5185m | | 689 | 901 | --- |
| Calcium | ppm | ASTM D5185m | | 1321 | 1509 | --- |
| Phosphorus | ppm | ASTM D5185m | | 764 | 903 | --- |
| Zinc | ppm | ASTM D5185m | | 926 | 1183 | --- |
| Sulfur | ppm | ASTM D5185m | | 2948 | 3240 | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 15.3 | 15.2 | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 13.6 | 7.0 | 7.8 | --- |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 7.1 | ▲ 11.1 | --- |

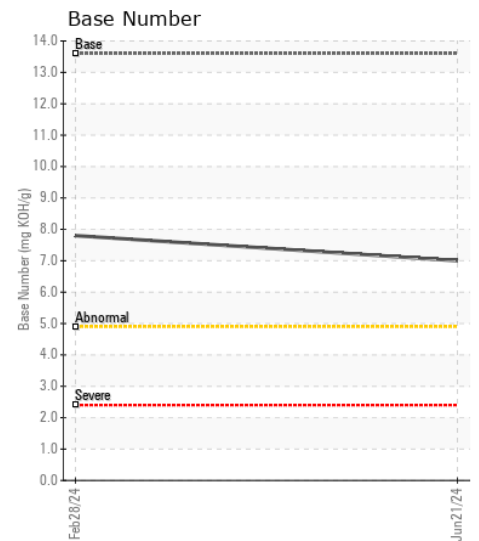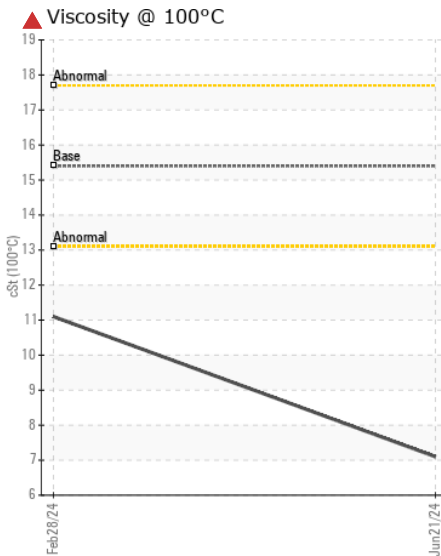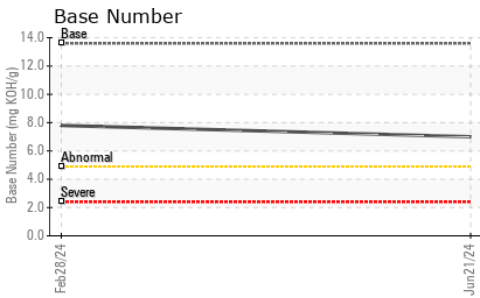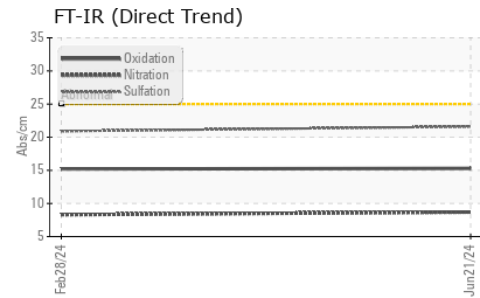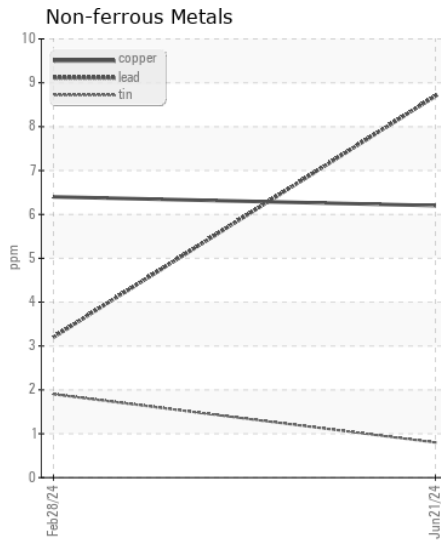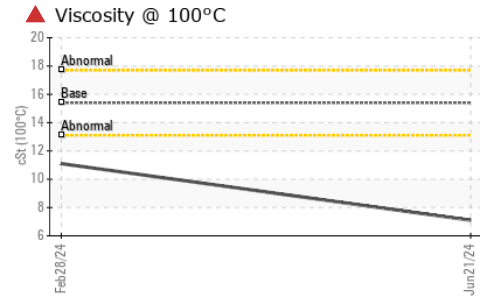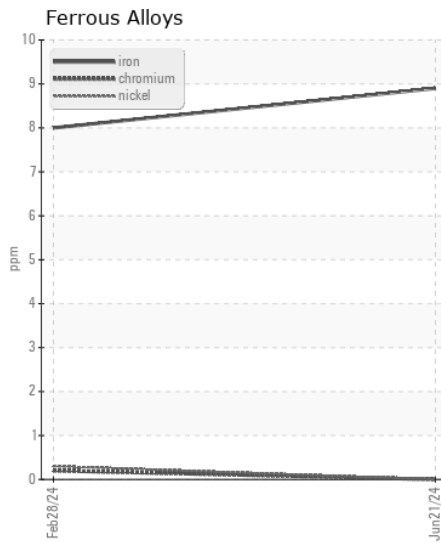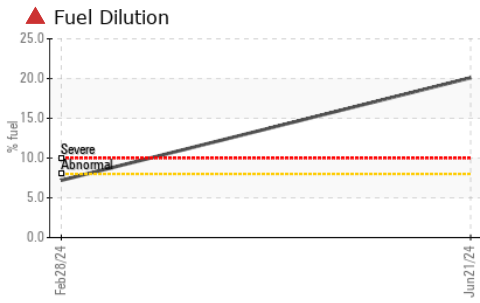

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213873 **Received** : 24 Jun 2024
Lab Number : 06217992 **Tested** : 26 Jun 2024
Unique Number : 11096189 **Diagnosed** : 26 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

JRE - GREENVILLE
 3604 HIGHWAY 264 E
 GREENVILLE, NC
 US 27834-5800
 Contact: Jeffrey Moore
 jeffrey.moore@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: