



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 35G 1FF035GXEKK286485

Component
Diesel Engine

Fluid
{not provided} (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213815	JR0071102	---
Sample Date		Client Info		21 Jun 2024	19 Nov 2020	---
Machine Age	hrs	Client Info		996	577	---
Oil Age	hrs	Client Info		996	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	28	66	---
Chromium	ppm	ASTM D5185m	>11	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	<1	---
Aluminum	ppm	ASTM D5185m	>31	5	3	---
Lead	ppm	ASTM D5185m	>26	<1	2	---
Copper	ppm	ASTM D5185m	>26	2	13	---
Tin	ppm	ASTM D5185m	>4	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	15	54	---
Potassium	ppm	ASTM D5185m	>20	0	2	---
Fuel		WC Method	>2.1	<1.0	1.1	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	10.2	9.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	18.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	21	---
Boron	ppm	ASTM D5185m		194	62	---
Barium	ppm	ASTM D5185m		1	8	---
Molybdenum	ppm	ASTM D5185m		237	116	---
Manganese	ppm	ASTM D5185m		<1	4	---
Magnesium	ppm	ASTM D5185m		790	77	---
Calcium	ppm	ASTM D5185m		1623	3774	---
Phosphorus	ppm	ASTM D5185m		902	1058	---
Zinc	ppm	ASTM D5185m		1088	1244	---
Sulfur	ppm	ASTM D5185m		3541	5083	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.1	11.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.1	13	---
Visc @ 100°C	cSt	ASTM D445		13.8	9.7	---


FT-IR (Direct Trend)

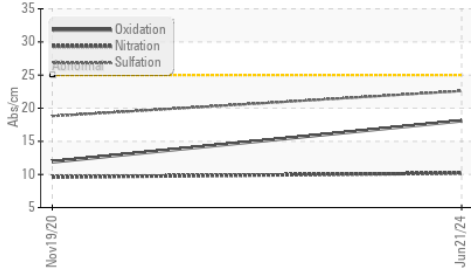


Base Number

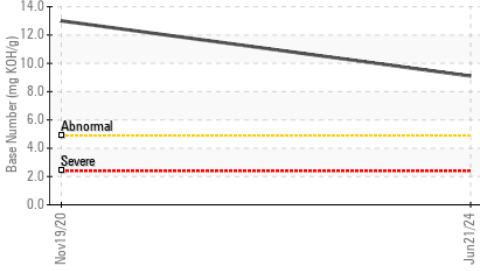


Viscosity @ 100°C

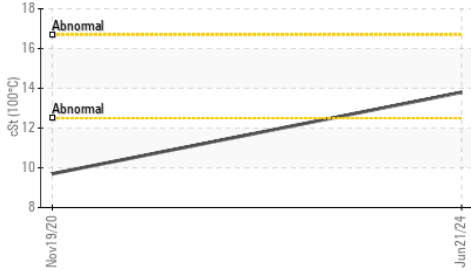


Ferrous Alloys

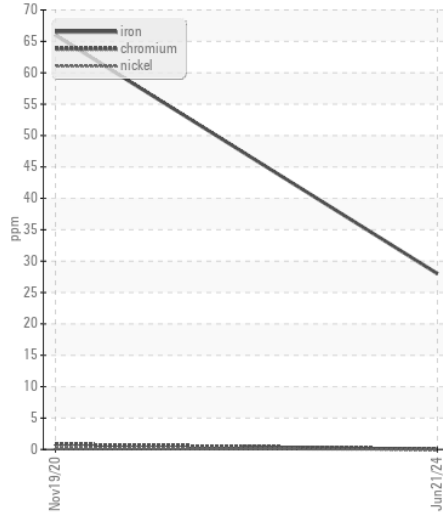


Non-ferrous Metals

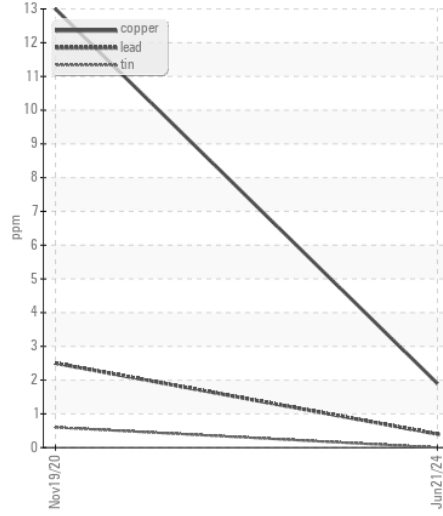

Viscosity @ 100°C

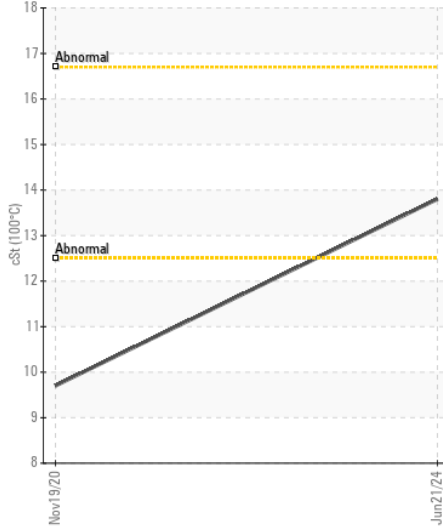

Base Number

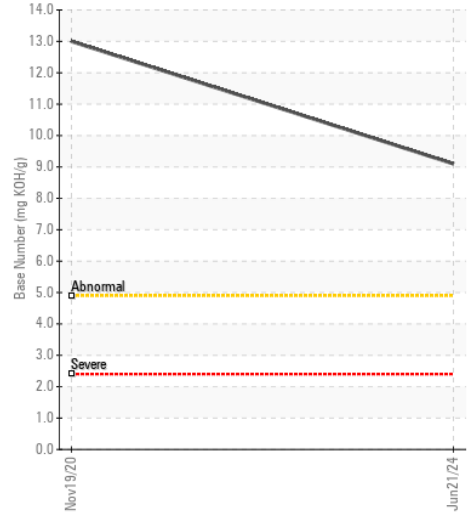

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0213815

Lab Number : 06217998

Unique Number : 11096195

Test Package : CONST (Additional Tests: TBN)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENVILLE

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: