



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Mobile Fleet
 Machine Id
864 864
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (8 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0947753	WC0918670	WC0861551
Sample Date		Client Info		20 Jun 2024	27 Mar 2024	28 Nov 2023
Machine Age	hrs	Client Info		26530	28018	27658
Oil Age	hrs	Client Info		359	360	787
Filter Age	hrs	Client Info		359	360	787
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>85	32	24	27
Chromium	ppm	ASTM D5185m	>4	1	1	1
Nickel	ppm	ASTM D5185m	>4	<1	1	<1
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	<1
Lead	ppm	ASTM D5185m	>20	<1	2	1
Copper	ppm	ASTM D5185m	>250	1	1	1
Tin	ppm	ASTM D5185m	>5	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	4	6	6
Potassium	ppm	ASTM D5185m	>20	0	2	0
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	0.6	0.9
Nitration	Abs/cm	*ASTM D7624	>20	7.6	7.5	7.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	22.2	22.7
Particles >4µm		ASTM D7647	>20000	3419	1749	3054
Particles >6µm		ASTM D7647	>5000	1862	953	1663
Particles >14µm		ASTM D7647	>640	317	162	283
Particles >21µm		ASTM D7647	>160	107	55	95
Particles >38µm		ASTM D7647	>40	16	8	15
Particles >71µm		ASTM D7647	>10	2	1	2
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/18/15	18/17/15	19/18/15
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	3	5
Boron	ppm	ASTM D5185m	250	36	49	44
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	49	55	43
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	533	546	500
Calcium	ppm	ASTM D5185m	3000	1814	1645	1722
Phosphorus	ppm	ASTM D5185m	1150	803	698	765
Zinc	ppm	ASTM D5185m	1350	984	941	888
Sulfur	ppm	ASTM D5185m	4250	2999	2557	2295
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.2	19.7	20.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.3	9.5	9.4
Visc @ 100°C	cSt	ASTM D445	10.9	11.0	11.6	11.7

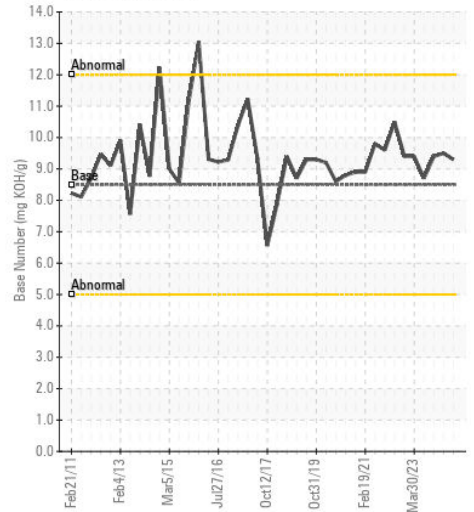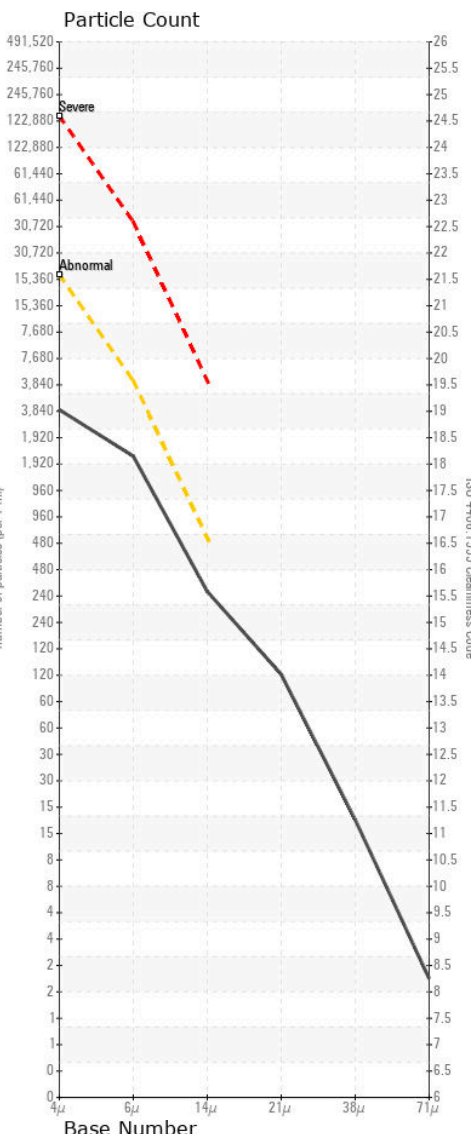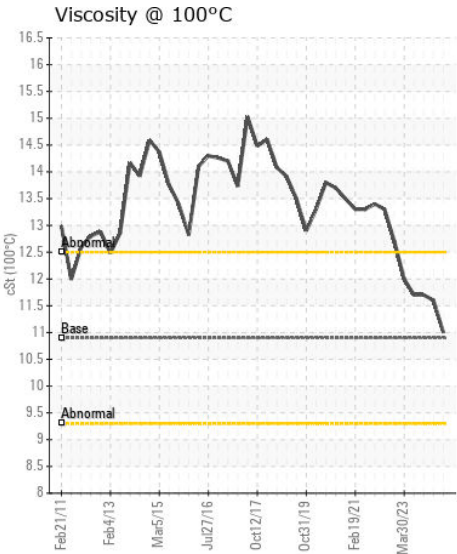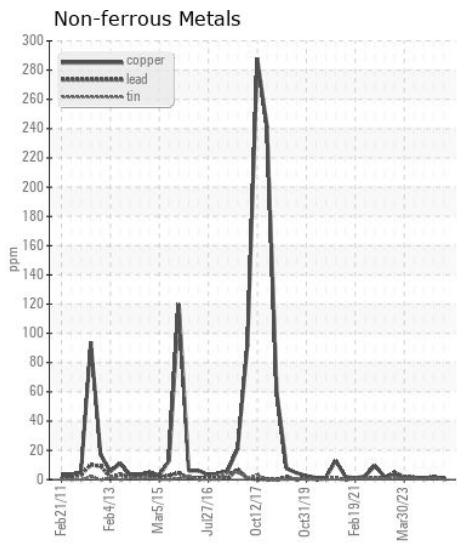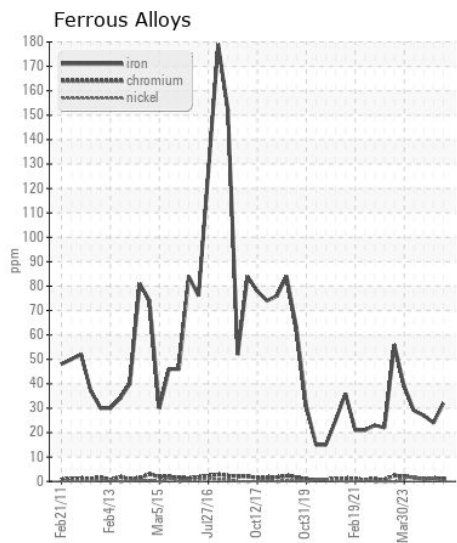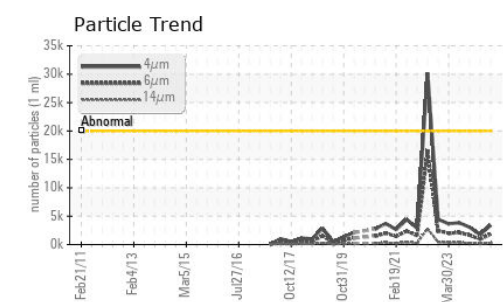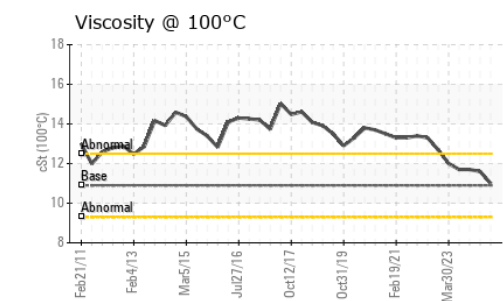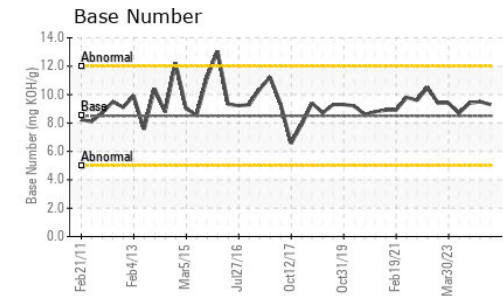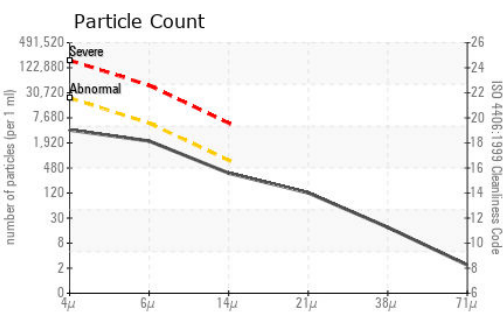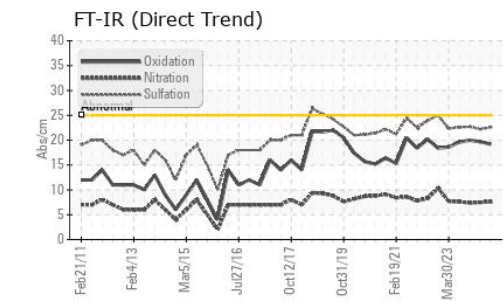

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0947753 **Received** : 24 Jun 2024
Lab Number : 06218039 **Tested** : 25 Jun 2024
Unique Number : 11096236 **Diagnosed** : 25 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount, TBN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162