



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Mobile Fleet
 Machine Id
8044 8044
 Component
Diesel Engine
 Fluid
MOBIL DELVAC 1300 SUPER 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0947749	WC0919108	WC0918632
Sample Date		Client Info		20 Jun 2024	24 Apr 2024	15 Mar 2024
Machine Age	hrs	Client Info		5165	4897	4627
Oil Age	hrs	Client Info		268	577	307
Filter Age	hrs	Client Info		268	577	307
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	ATTENTION	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	3	9	49
Chromium	ppm	ASTM D5185m	>20	0	1	3
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	4	19
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	1	4	145
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>25	5	7	29
Potassium	ppm	ASTM D5185m	>20	<1	8	17
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	5.6	8.1	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	21.7	21.9
Particles >4µm		ASTM D7647	>20000	3619	8404	4393
Particles >6µm		ASTM D7647	>5000	1971	4578	2393
Particles >14µm		ASTM D7647	>640	336	779	407
Particles >21µm		ASTM D7647	>160	113	262	137
Particles >38µm		ASTM D7647	>40	17	41	21
Particles >71µm		ASTM D7647	>10	2	4	2
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/18/16	20/19/17	19/18/16
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	2	6
Boron	ppm	ASTM D5185m		47	42	29
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		46	52	44
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		515	523	445
Calcium	ppm	ASTM D5185m		1759	1699	1427
Phosphorus	ppm	ASTM D5185m		796	755	617
Zinc	ppm	ASTM D5185m		958	938	776
Sulfur	ppm	ASTM D5185m		3017	2658	2002
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.9	21.3	20.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	9.7	8.8	9.6
Visc @ 100°C	cSt	ASTM D445	11.9	10.9	11.8	11.5

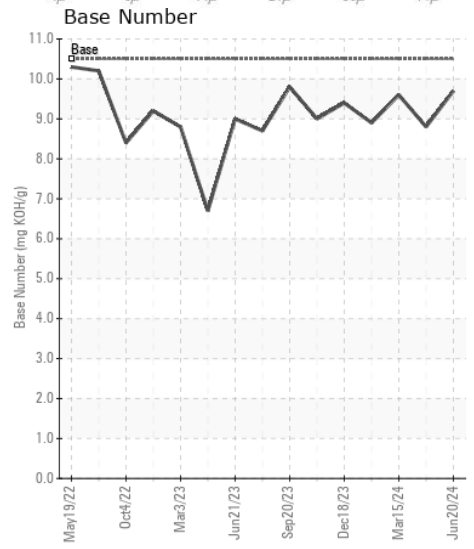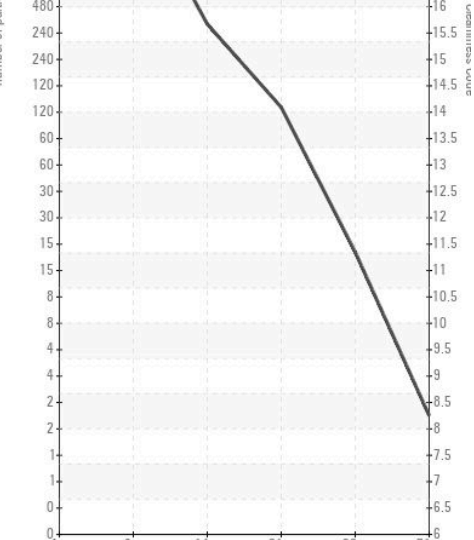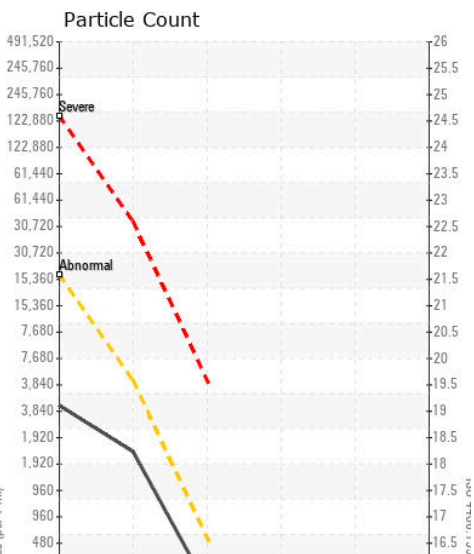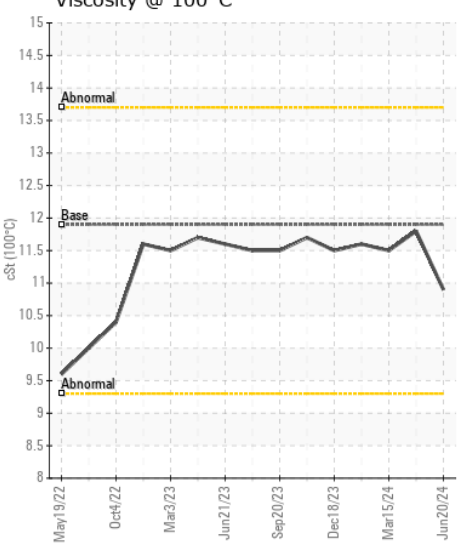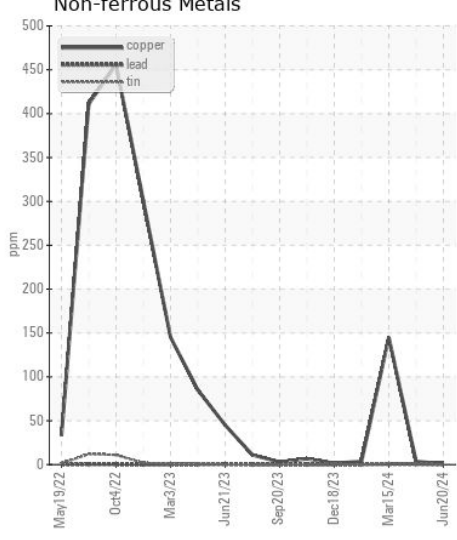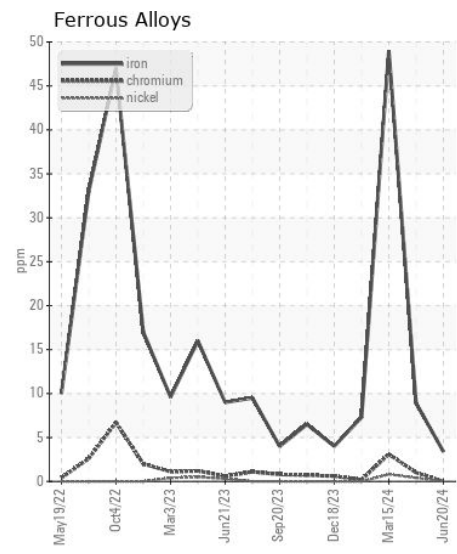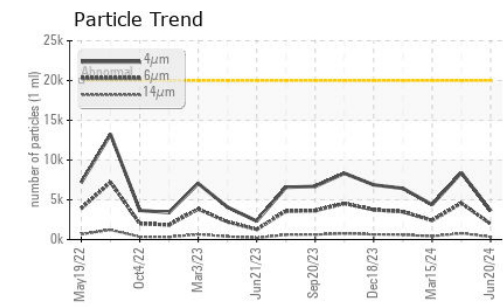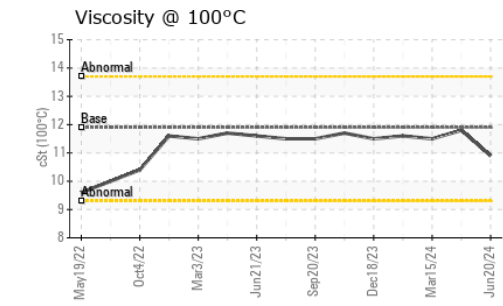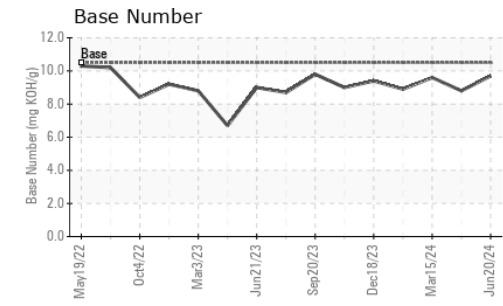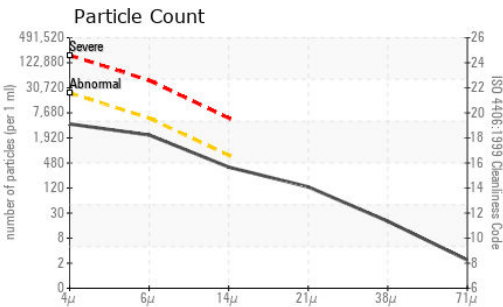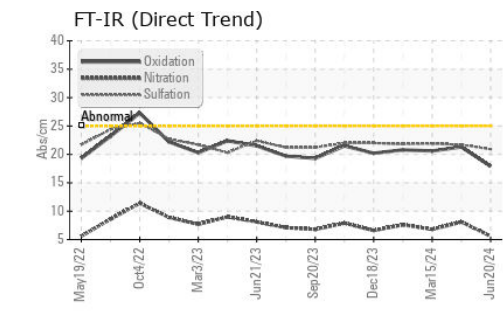

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0947749 **Received** : 24 Jun 2024
Lab Number : 06218040 **Tested** : 25 Jun 2024
Unique Number : 11096237 **Diagnosed** : 25 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount, TBN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162