



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 700L 1T0700LXHMF401534
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218732	JR0191353	JR0185090
Sample Date		Client Info		13 Jun 2024	01 Feb 2024	09 Oct 2023
Machine Age	hrs	Client Info		3044	2612	2179
Oil Age	hrs	Client Info		865	433	2179
Filter Age	hrs	Client Info		865	433	2179
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		Not Changd	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	3	4	14
Chromium	ppm	ASTM D5185m	>10	<1	1	3
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	2	2	5
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	4	4	11
Potassium	ppm	ASTM D5185m	>20	3	0	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	545	772	1095
Particles >6µm		ASTM D7647	>1300	95	313	204
Particles >14µm		ASTM D7647	>160	11	34	26
Particles >21µm		ASTM D7647	>40	2	7	9
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/11	17/15/12	17/15/12
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	1	2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		1	<1	2
Calcium	ppm	ASTM D5185m	87	85	130	89
Phosphorus	ppm	ASTM D5185m	727	695	645	626
Zinc	ppm	ASTM D5185m	900	852	828	833
Sulfur	ppm	ASTM D5185m	1500	1907	1584	1610
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.70	0.66	0.75
Visc @ 40°C	cSt	ASTM D445	65	56.3	56.8	54.4

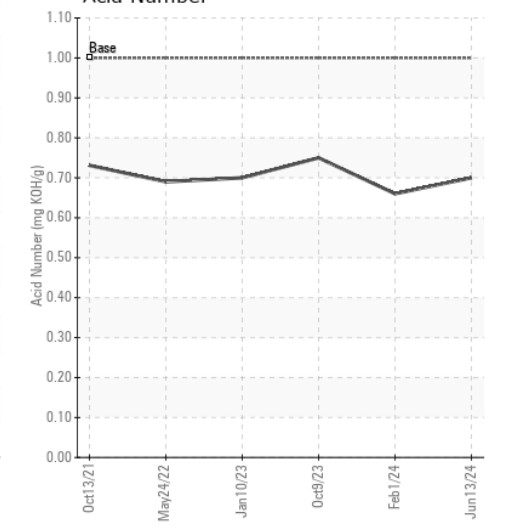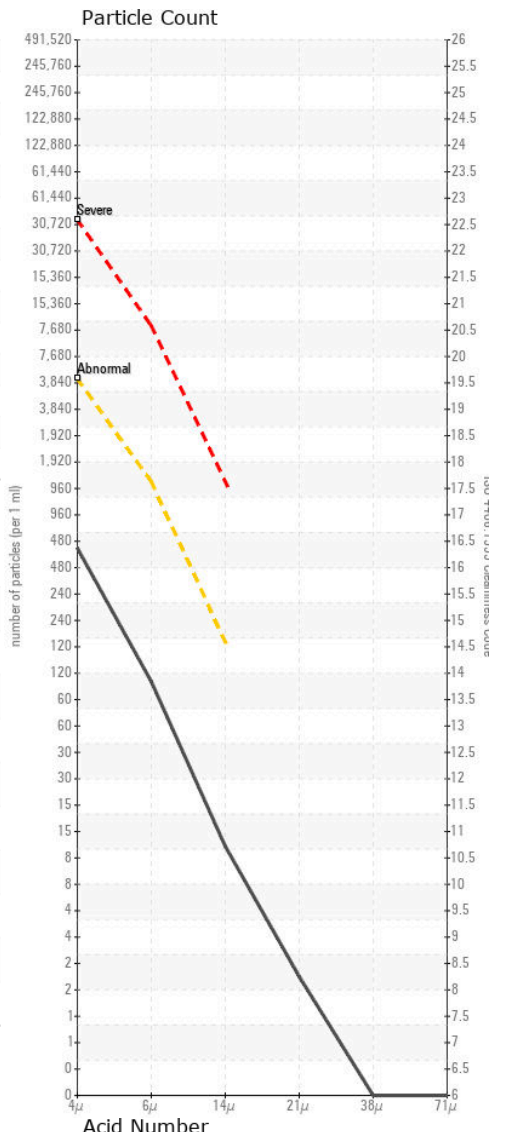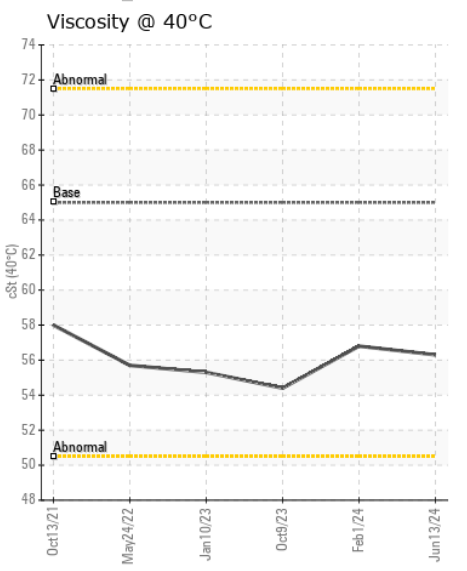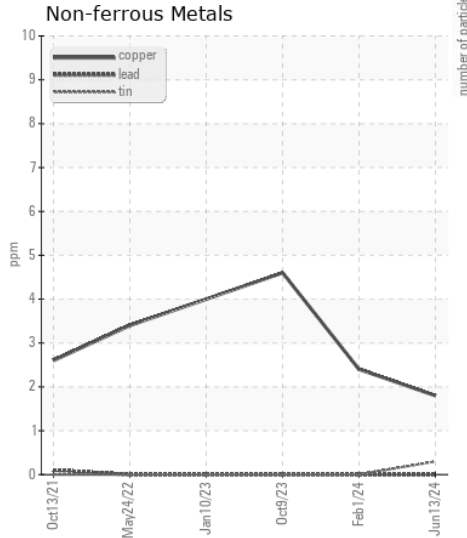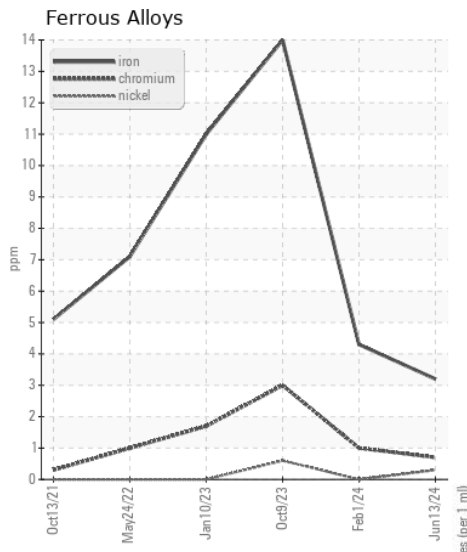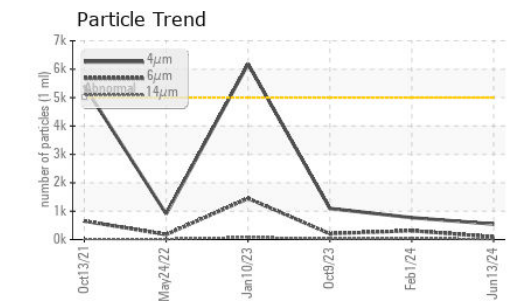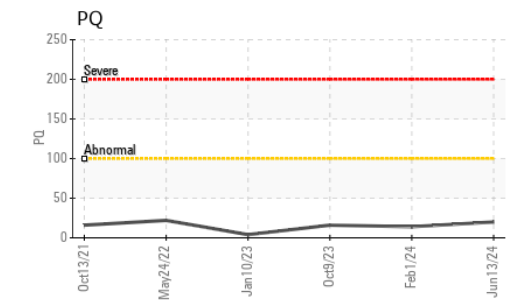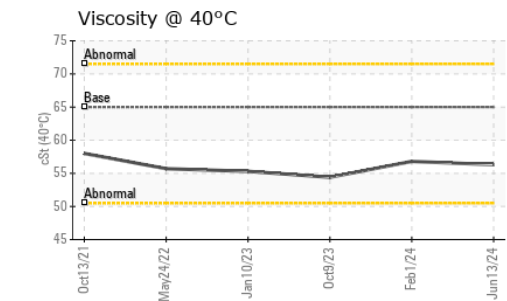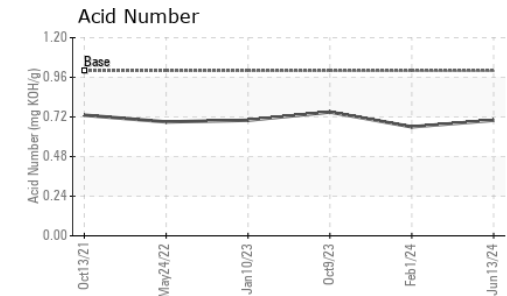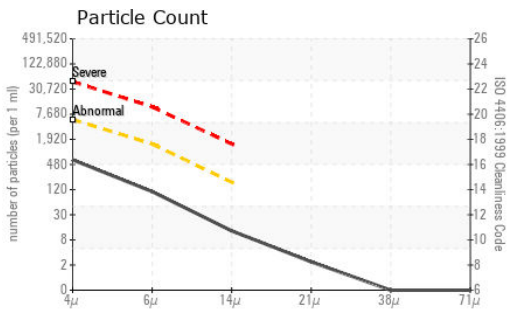

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218732 **Received** : 24 Jun 2024
Lab Number : 06218080 **Tested** : 25 Jun 2024
Unique Number : 11096277 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

TENNOCA CONSTRUCTION
 PO BOX 2379
 CANDLER, NC
 US 28715
 Contact: MARK ROSS
 mark@tennoca.com
 T: (828)665-8331
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)