



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 4 - Fairmont [RO# 152234]
Machine Id
JOHN DEERE 650H T0650HX886314
Component
Transmission
Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (14 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0050959	---	---
Sample Date		Client Info		18 Jun 2024	---	---
Machine Age	hrs	Client Info		3584	---	---
Oil Age	hrs	Client Info		2000	---	---
Filter Age	hrs	Client Info		2000	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>100	14	---	---
Iron	ppm	ASTM D5185m	>61	<1	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	1	---	---
Lead	ppm	ASTM D5185m	>9	0	---	---
Copper	ppm	ASTM D5185m	>100	1	---	---
Tin	ppm	ASTM D5185m	>3	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>21	4	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>160000	1747	---	---
Particles >6µm		ASTM D7647	>40000	119	---	---
Particles >14µm		ASTM D7647	>5000	7	---	---
Particles >21µm		ASTM D7647	>1300	2	---	---
Particles >38µm		ASTM D7647	>320	0	---	---
Particles >71µm		ASTM D7647	>80	0	---	---
Oil Cleanliness		ISO 4406 (c)	>24/22/19	18/14/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m	>30	1	---	---
Boron	ppm	ASTM D5185m		22	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		19	---	---
Calcium	ppm	ASTM D5185m		2678	---	---
Phosphorus	ppm	ASTM D5185m		1033	---	---
Zinc	ppm	ASTM D5185m		1165	---	---
Sulfur	ppm	ASTM D5185m		3714	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.45	---	---
Visc @ 40°C	cSt	ASTM D445	117	39.3	---	---

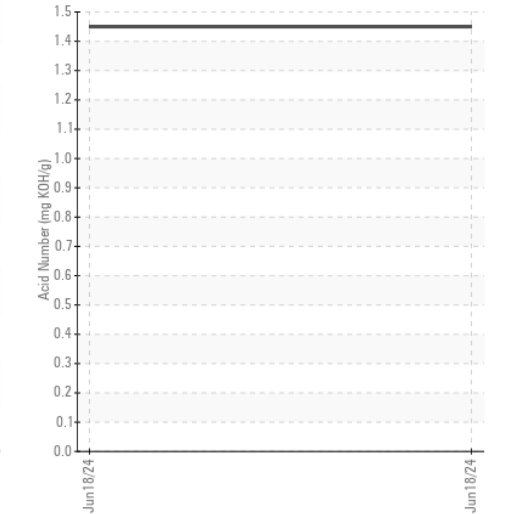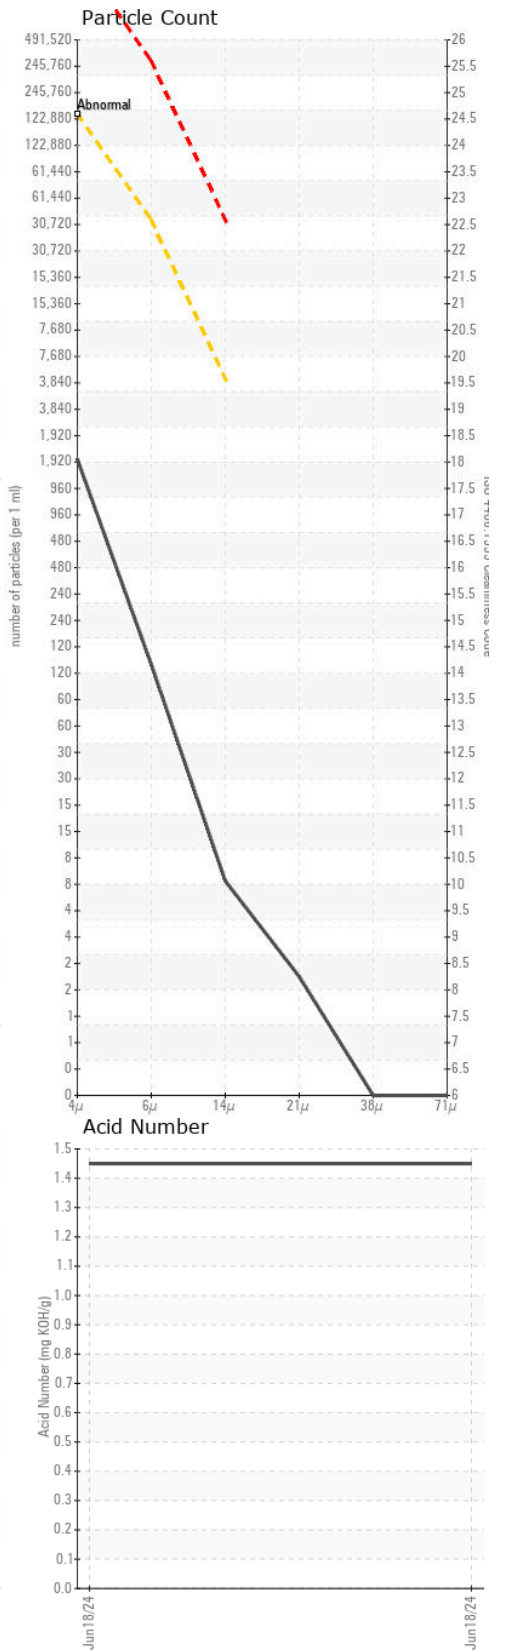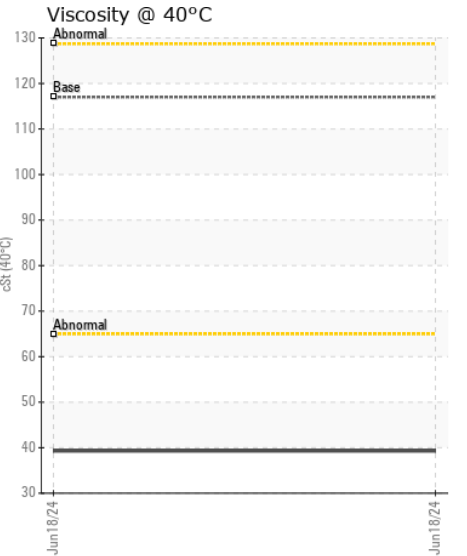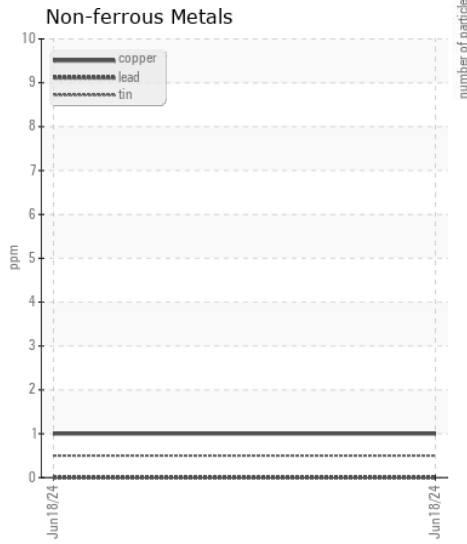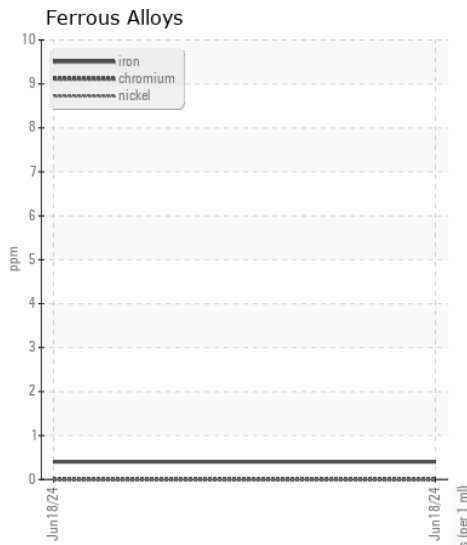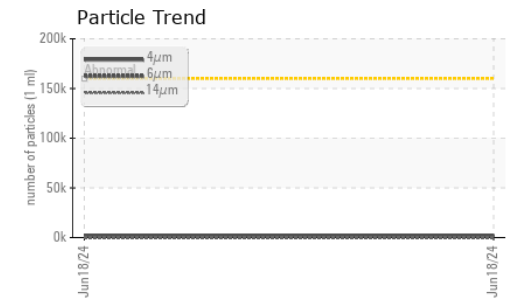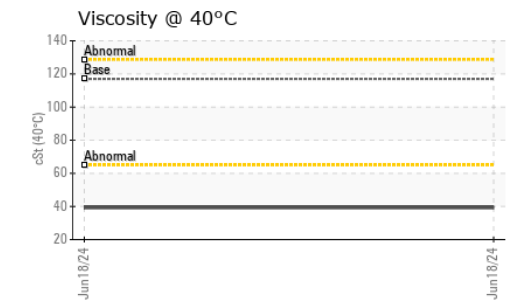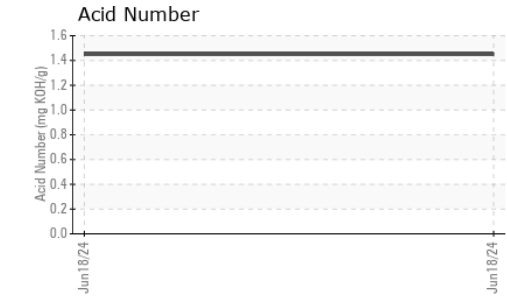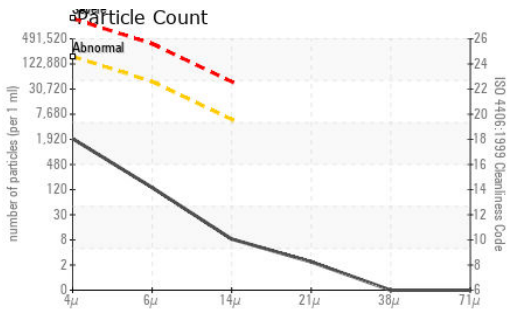

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0050959 **Received** : 24 Jun 2024
Lab Number : 06218086 **Tested** : 25 Jun 2024
Unique Number : 11096283 **Diagnosed** : 25 Jun 2024 - Jonathan Hester
Test Package : CONST (Additional Tests: PQ, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

T:
 F: (740)373-5570