



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BRANER 2 - BRANER
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PTK0005326	PTK0005341	PTK0004696
Sample Date		Client Info		02 Apr 2024	29 Dec 2023	27 Sep 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>75	4	3	3
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	<1	<1	<1
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647		406	1974	393
Particles >6µm		ASTM D7647	>2500	111	653	105
Particles >14µm		ASTM D7647	>320	9	72	9
Particles >21µm		ASTM D7647	>80	4	22	2
Particles >38µm		ASTM D7647	>20	0	1	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>-/18/15	16/14/10	18/17/13	16/14/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	<1	0
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	25	<1	0	3
Calcium	ppm	ASTM D5185m	200	53	49	54
Phosphorus	ppm	ASTM D5185m	300	361	303	319
Zinc	ppm	ASTM D5185m	370	410	367	380
Sulfur	ppm	ASTM D5185m	2500	1771	1305	1383
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.31	0.25	0.30
Visc @ 40°C	cSt	ASTM D445	46	45.7	45.0	44.8

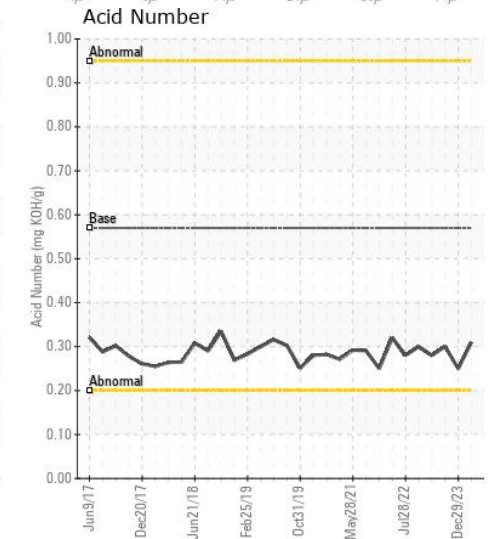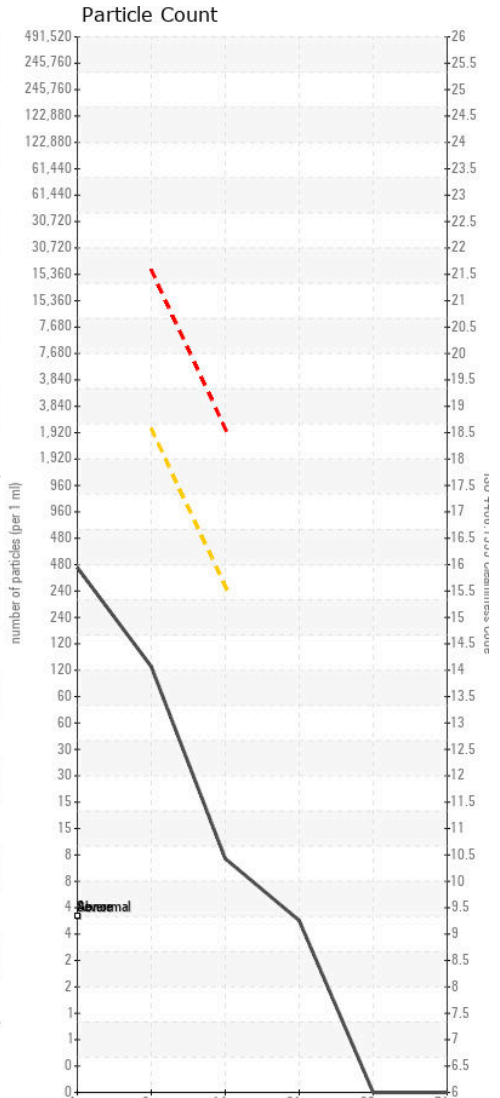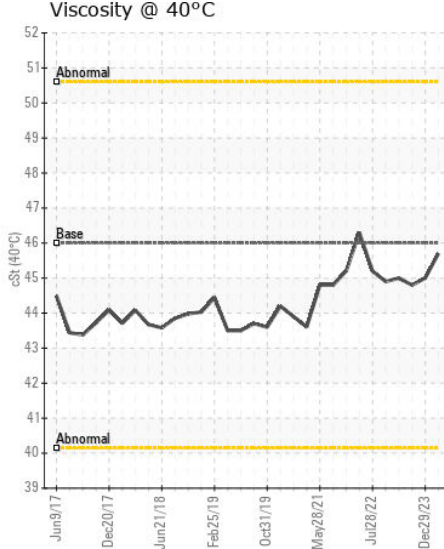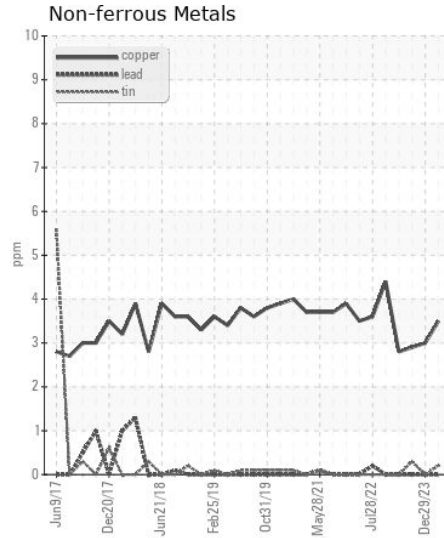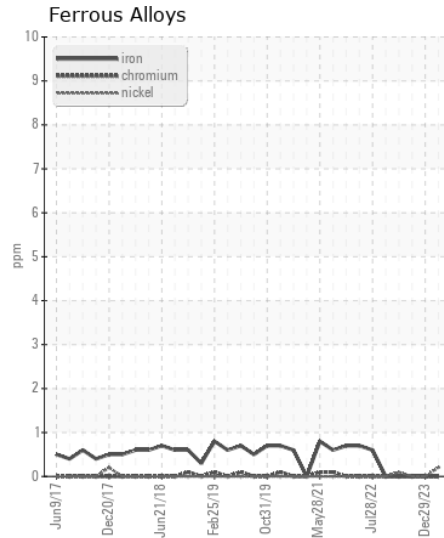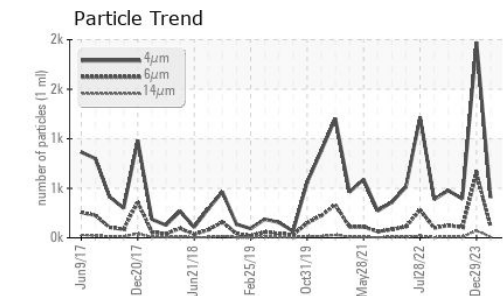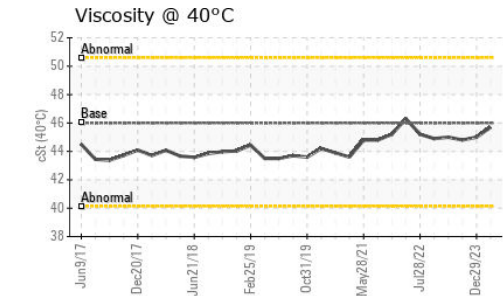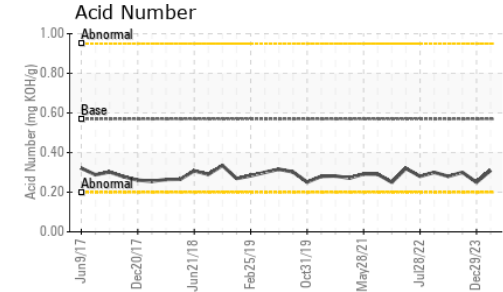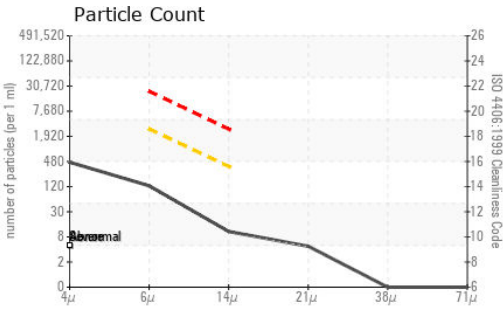

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PTK0005326 **Received** : 24 Jun 2024
Lab Number : 06218217 **Tested** : 25 Jun 2024
Unique Number : 11096414 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : MOB 2

VIKING MATERIALS
 3225 COMO AVE
 MINNEAPOLIS, MN
 US 55414
 Contact: RICK FAUE
 rickf@vikingmaterials.com
 T: (612)617-5800
 F: (612)917-5814

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)