



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 24927
 Component
Diesel Engine
 Fluid
TRC PRO-SPEC IV XP SYN BLEND 15W40 (13 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06218424	TR05930502	---
Sample Date		Client Info		19 Jun 2024	15 Aug 2023	---
Machine Age	mls	Client Info		119582	108180	---
Oil Age	mls	Client Info		22199	10800	---
Filter Age	mls	Client Info		7101	10800	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	42	22	---
Chromium	ppm	ASTM D5185m	>20	2	<1	---
Nickel	ppm	ASTM D5185m	>2	<1	0	---
Titanium	ppm	ASTM D5185m	>2	<1	0	---
Silver	ppm	ASTM D5185m	>2	<1	0	---
Aluminum	ppm	ASTM D5185m	>25	6	5	---
Lead	ppm	ASTM D5185m	>40	2	<1	---
Copper	ppm	ASTM D5185m	>330	7	2	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	10	7	---
Potassium	ppm	ASTM D5185m	>20	4	2	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	1.4	0.9	---
Nitration	Abs/cm	*ASTM D7624	>20	12.9	11.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.4	22.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	---
Boron	ppm	ASTM D5185m		6	6	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		126	119	---
Manganese	ppm	ASTM D5185m		1	<1	---
Magnesium	ppm	ASTM D5185m		80	83	---
Calcium	ppm	ASTM D5185m		4339	4039	---
Phosphorus	ppm	ASTM D5185m		1021	915	---
Zinc	ppm	ASTM D5185m		1183	1098	---
Sulfur	ppm	ASTM D5185m		5367	5078	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.3	14.9	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.77	13.09	---
Visc @ 100°C	cSt	ASTM D445	15.5	15.5	14.7	---

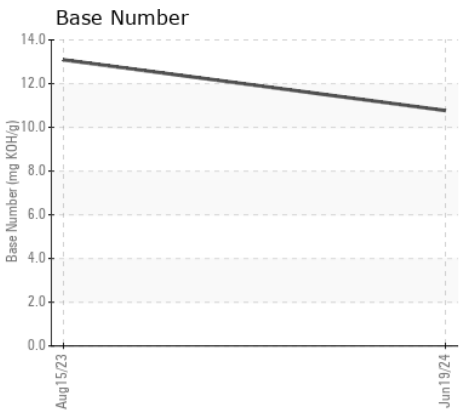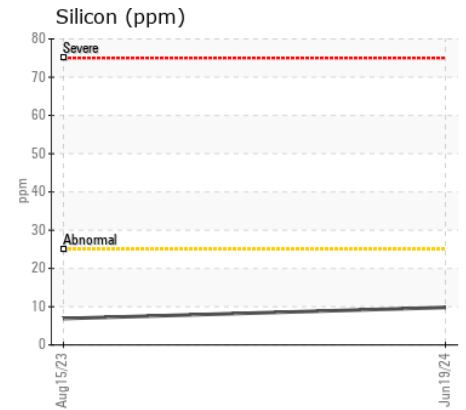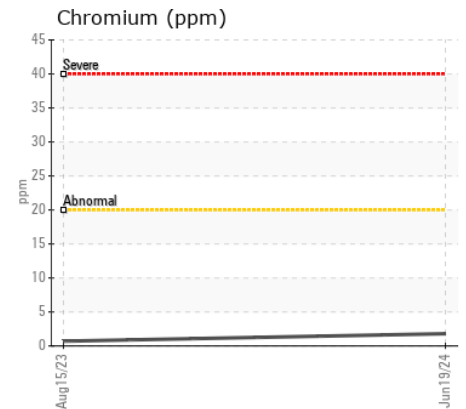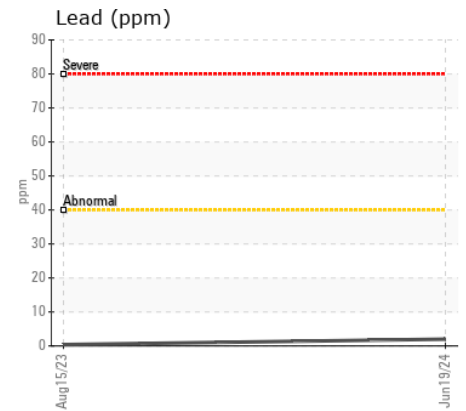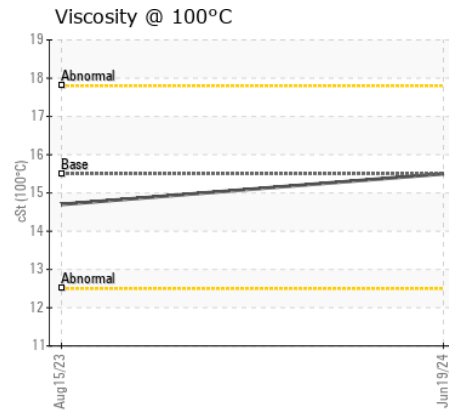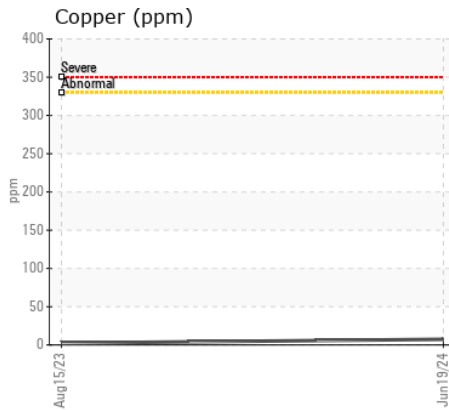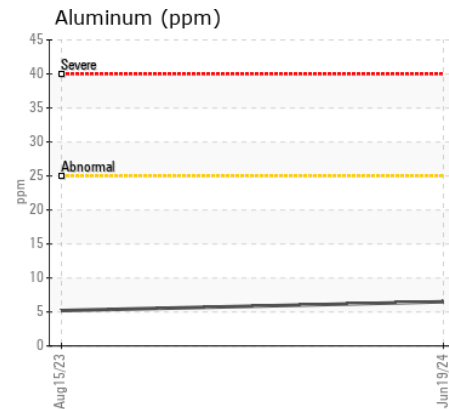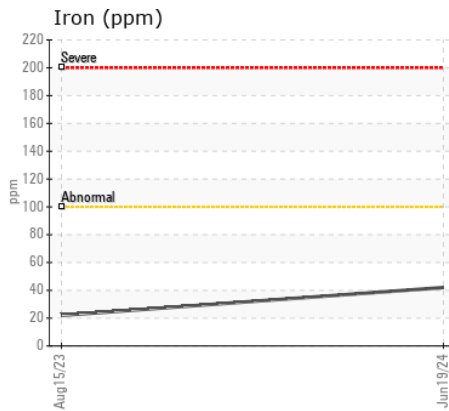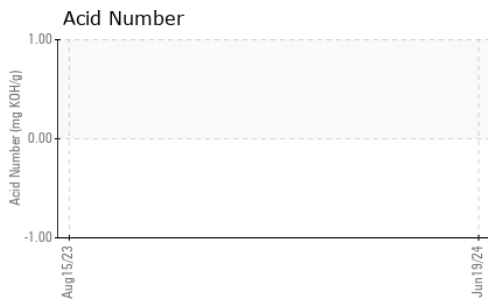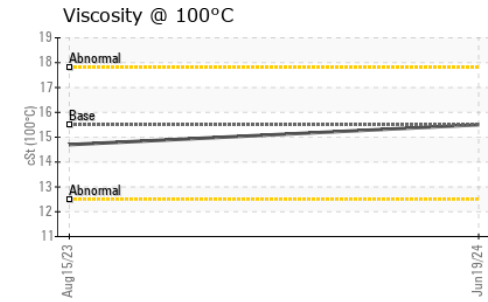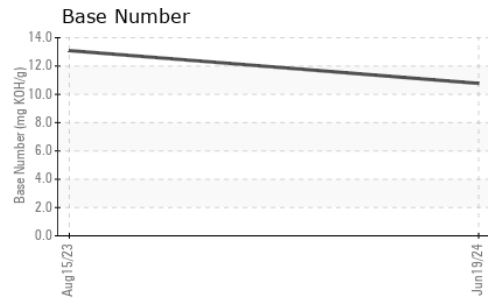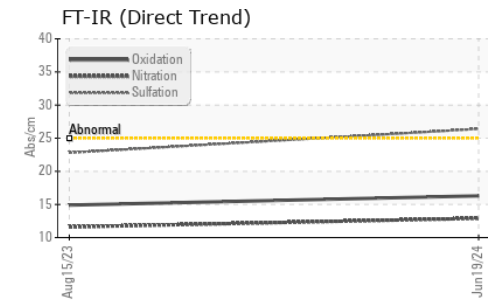

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06218424 **Received** : 24 Jun 2024
Lab Number : 06218424 **Tested** : 25 Jun 2024
Unique Number : 11096621 **Diagnosed** : 25 Jun 2024 - Sean Felton
Test Package : MOB 2 (Additional Tests: TAN Man)

VALLEY SPRAY
P.O. BOX 466
MONROE, OR
US 97456
Contact: JEFF WARREN

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: