



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410ELJNF713348
Component
Transmission (Auto)
Fluid
JOHN DEERE HD SynTran (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213870	JR0200803	JR0186753
Sample Date		Client Info		21 Jun 2024	28 Feb 2024	18 Oct 2023
Machine Age	hrs	Client Info		3970	3511	3038
Oil Age	hrs	Client Info		2414	2428	2394
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	40	48	37
Iron	ppm	ASTM D5185m	>160	120	108	101
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	<1	0	0
Aluminum	ppm	ASTM D5185m	>50	3	<1	<1
Lead	ppm	ASTM D5185m	>50	1	<1	0
Copper	ppm	ASTM D5185m	>225	2	<1	2
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	5	4	4
Potassium	ppm	ASTM D5185m	>20	3	1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	3
Boron	ppm	ASTM D5185m	168	115	107	123
Barium	ppm	ASTM D5185m		2	0	0
Molybdenum	ppm	ASTM D5185m		1	0	0
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m		3	0	0
Calcium	ppm	ASTM D5185m	33	114	94	55
Phosphorus	ppm	ASTM D5185m	330	290	284	269
Zinc	ppm	ASTM D5185m	0	34	12	10
Sulfur	ppm	ASTM D5185m	980	375	280	300
Visc @ 40°C	cSt	ASTM D445	39	37.0	37.2	37.0

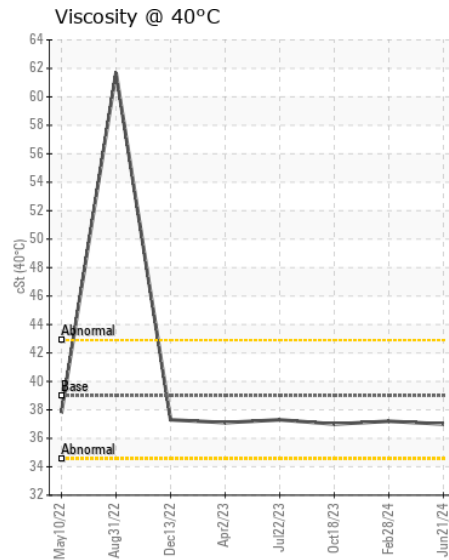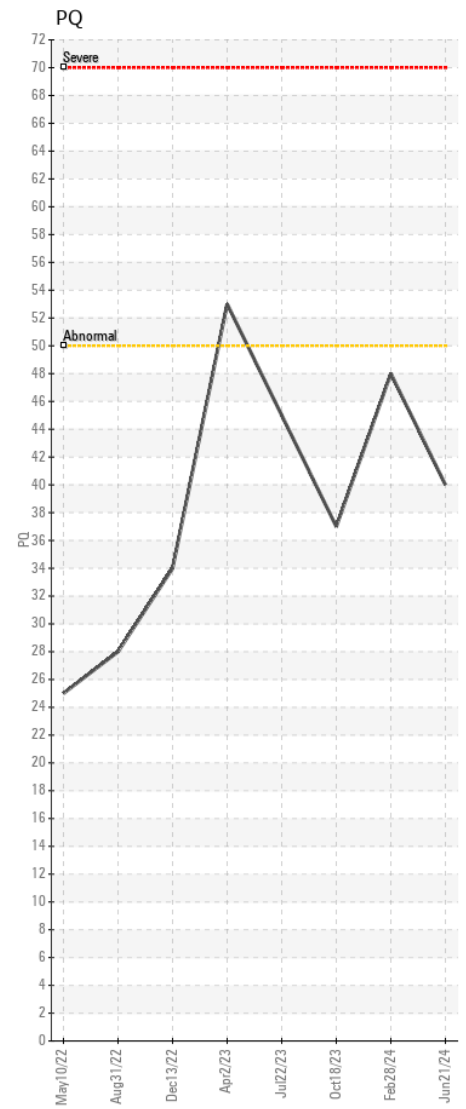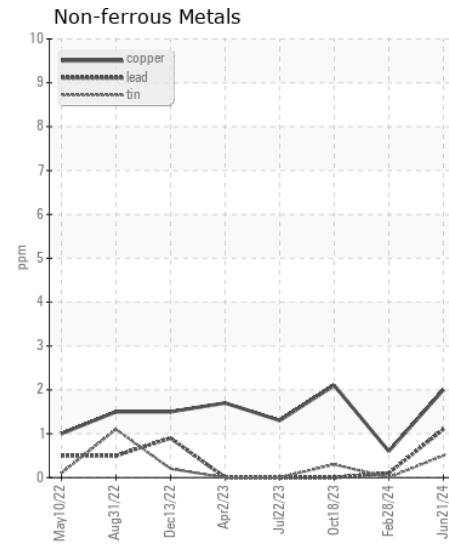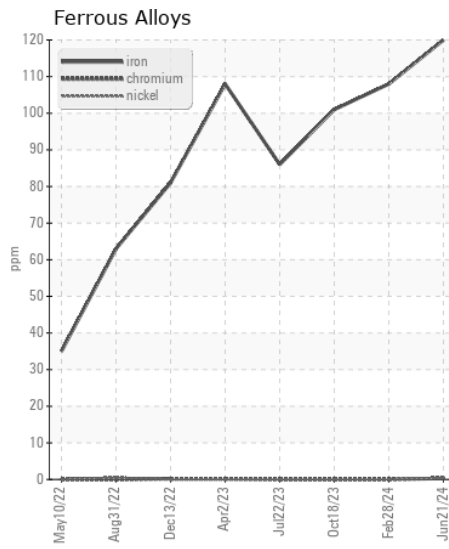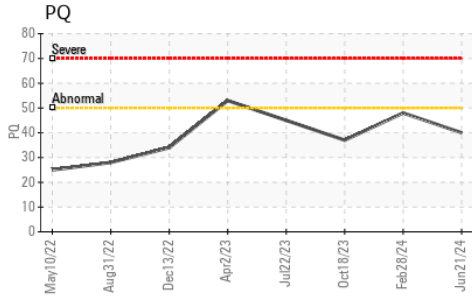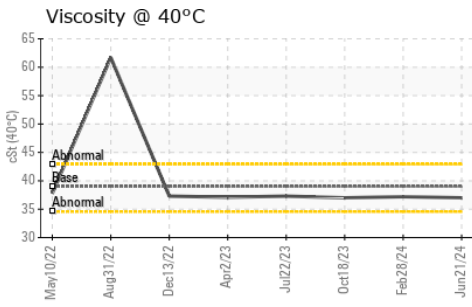

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0213870

Lab Number : 06218445

Unique Number : 11096642

Test Package : CONST (Additional Tests: PQ)

Received : 24 Jun 2024

Tested : 25 Jun 2024

Diagnosed : 25 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENVILLE

3604 HIGHWAY 264 E

GREENVILLE, NC

US 27834-5800

Contact: GREENVILLE SHOP

christopher.martin@jamesriverequipment.com

T:

F: